


PCB Connector

Right Angle Plugs

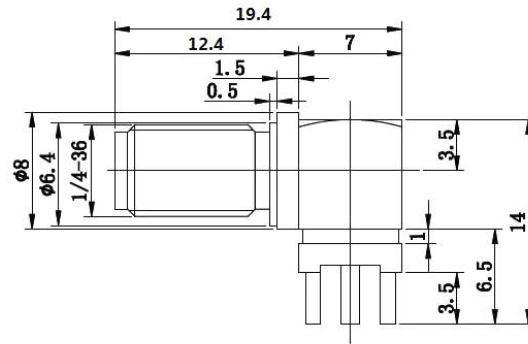

Product type	Notes
SMA-SFRAE	

TECHNICAL CHARACTERISTICS

Temp.range	-65~+165°C
Vibration	MIL-STD-202, Method 213
Impedance	50Ω
Frequency Range	DC~12.4GHz
Working Voltage	335V max
Withstand Voltage	1000V max
Contact resistance	Center Contact ≤ 3 mΩ Outer Contact ≤ 2mΩ
Insulation resistance	≥ 5000 MΩ
Insertion loss	≤ 0.15dB
VSWR	Straight ≤ 1.15 Right angle ≤ 1.25
Mating Cycles	≥500 cycles

MATERIAL & PLATING

shell	brass	gold plated
contact pin	brass	gold plated
socket	beryllium or tin brass	gold plated
insulator	PTFE	
o-ring sealing	silastic	

APPLICABLE STANDARD

MIL-C-39012;

CECC 22210;

IEC 60169-15.



Seconn International Enterprise Co., Ltd.

Tel No.: 886-2-2221-9011 Fax No.: 886-2-2228-8096

<http://www.seconn-co.com>

Address: 5F.-5, No.118-18, Sec. 3, Jhongshan Rd., Jhonghe City, Taipei County 23544, Taiwan.