| REVISION RECORD | | |
|---|---|---|
| REV | DESCRIPTION | DATE |
| A/0 | | 2007/08/10 |
| A/1 | Update edition | 2008/06/25 |
| | | |

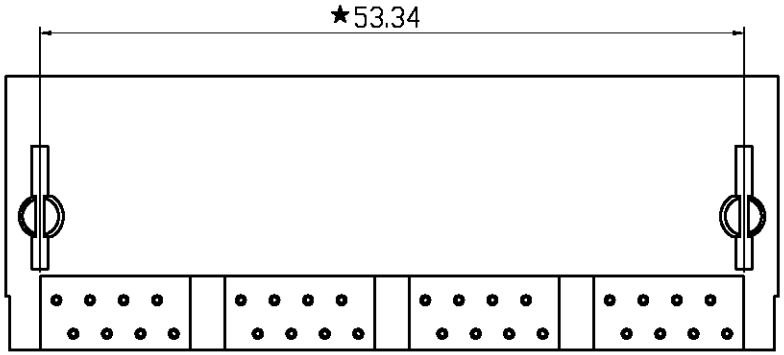


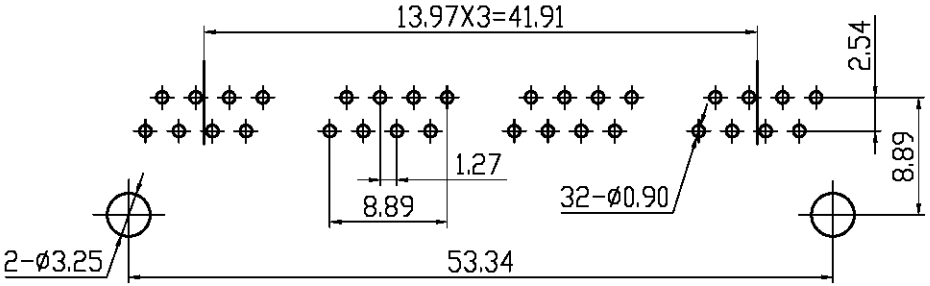


PC Board Layout

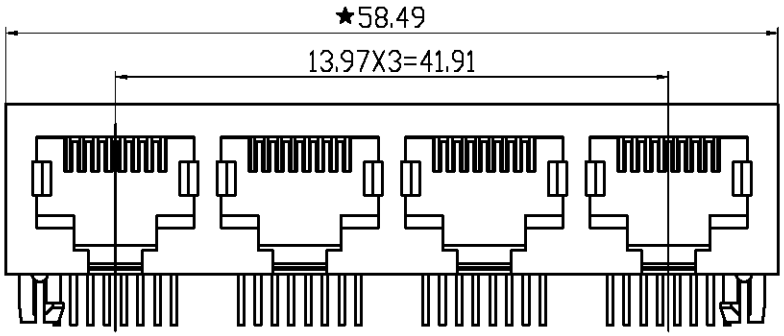


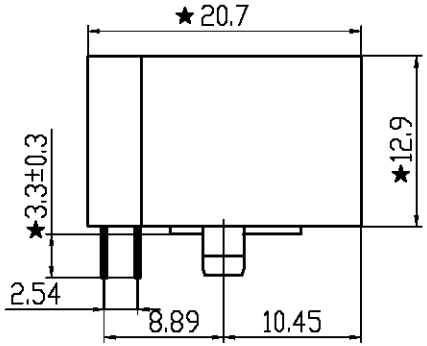


PCB JACK Specification

1. Insulation Resistance:500MΩMIN @ 500 VDC
2. Withstanding Voltage:AC1000V 50Hz or 60Hz 1min.
3. Durability:600 Mating Circles MIN.
4. Gold Plating:(3;6;15;30;50)u inch

Remark:

1. Tolerances Unless Otherwise Specified
   .0±0.25 .00±0.20 .000±0.10
2. The mark with ★ is the key inspection dimension for QC

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| UNIT | mm | Projection | | Seconn International Enterprise Co., Ltd. | | | |
| TOLERANCES | | | | TITLE | | | |
| x. = ±<br>.x = ±<br>.xx = ± | .xxx = ± | | | RJ45 PCB Jack conector 8PSC 1x4 | | | |
| DRAWN | Kevin | DATE | 06-25-08 | PART NO. | JAKR-S5921-8PSC-1x4 | | |
| SCALE | 1:1 | SIZE | A4 | SHEET | 1/1 | REV | |