

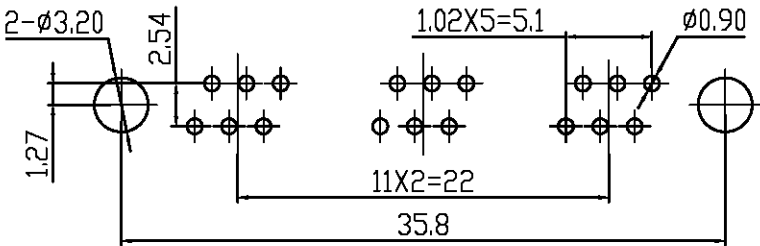
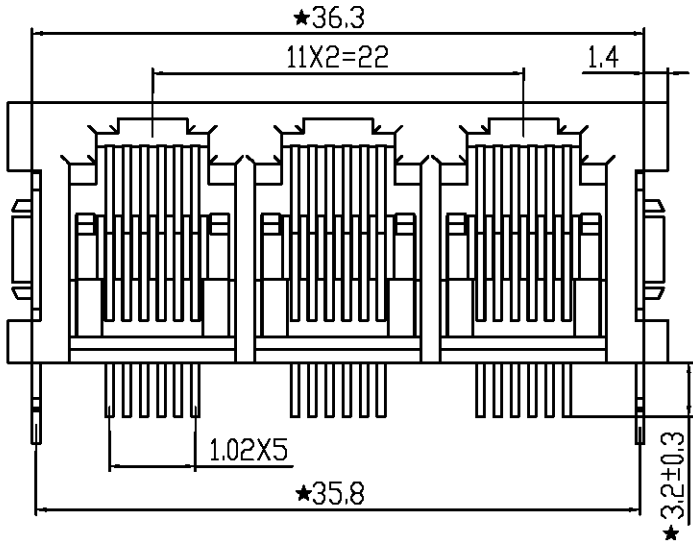


REVISION RECORD		
REV	DESCRIPTION	DATE
A/0		2007/08/10
A/1	Update edition	2008/06/06

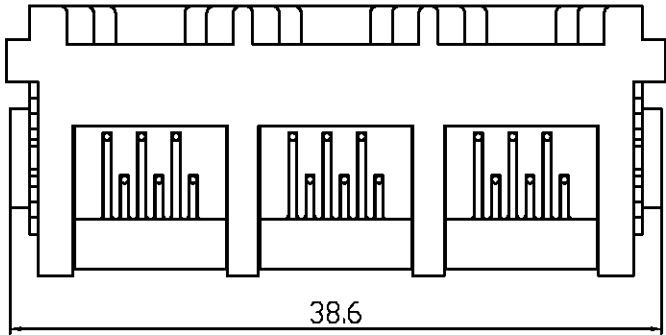

PC Board Layout

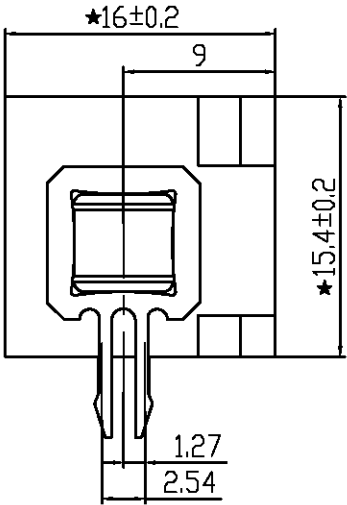

PCB JACK Specification

1. Insulation Resistance:500MΩ MIN @ 500 VDC
2. Withstanding Voltage:AC1000V 50Hz or 60Hz 1min.
3. Durability:600 Mating Circles MIN.
4. Gold Plating:(3;6;15;30;50)u inch

Remark:

1. Tolerances Unless Otherwise Specified
.0±0.25 .00±0.20 .000±0.10
2. The mark with★ is the key inspection dimension for QC

UNIT	mm	Projection		Secom International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x = ± .xxx = ± .x = ± .xx = ±				RJ11 PCB Jack connector 3 port			
				PART NO.		JAKR-S5225-6P6C-1x3-90 *	
DRAWN	Kevin	DATE	6/5/2008				
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	