
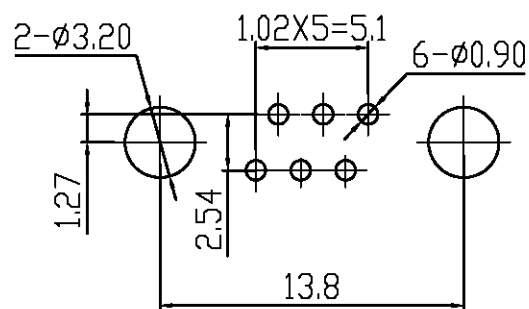
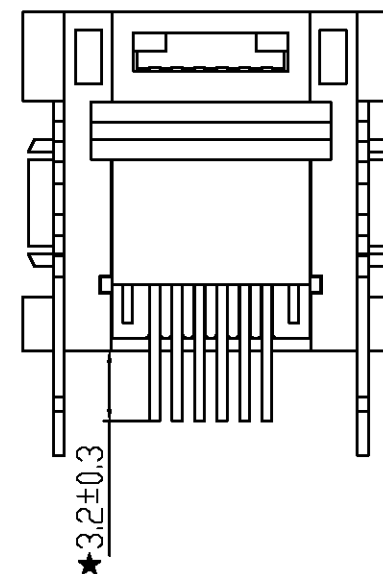
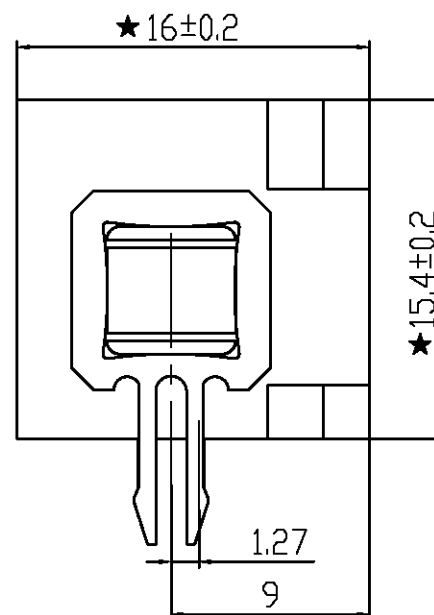


REVISION RECORD		
REV	DESCRIPTION	DATE
A/0		2007/08/10
A/1	Update edition	2008/06/05

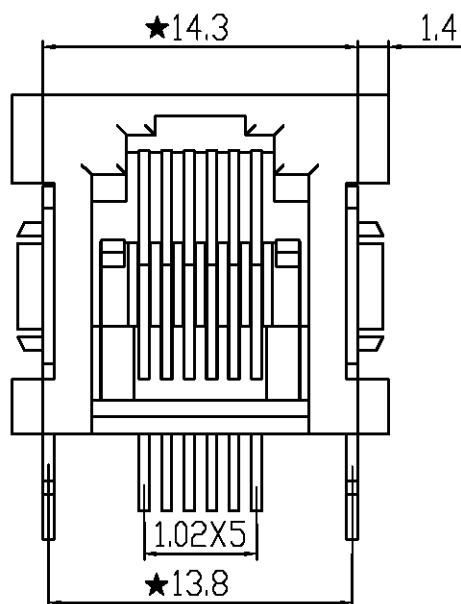

PC Board Layout

PCB JACK Specification

1. Insulation Resistance: 500MΩ MIN @ 500 VDC
2. Withstanding Voltage: AC1000V 50Hz or 60Hz 1min.
3. Durability: 600 Mating Circles MIN.
4. Gold Plating: (3;6;15;30;50)u inch

Remark:

1. Tolerances Unless Otherwise Specified
.0±0.25 .00±0.20 .000±0.10
2. The mark with ★ is the key inspection dimension for QC

UNIT	mm	Projection	Scale	Secom International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x. = ±	.xxx = ±			RJ11 PCB Jack connector 1 port			
.x = ±							
xx = ±							
RAWN	Kevin	DATE	6/5/2008	PART NO.	JAKR-S5225-6P6C-1x1-90°		
CALE	1:1	SIZE	A4	SHEET	1/1	REV	