

REV	ZONE	REVISION	DATE

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.






Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

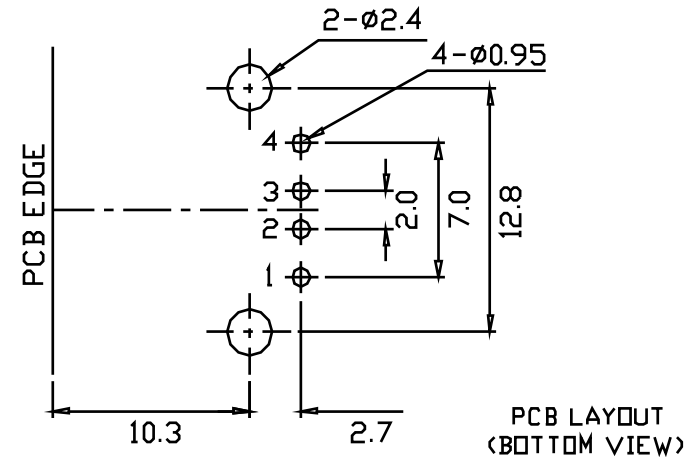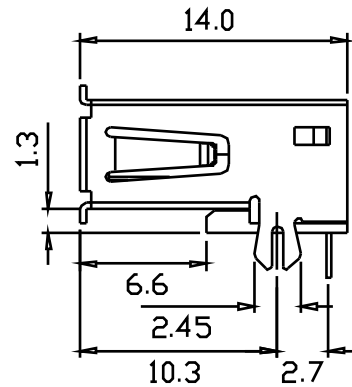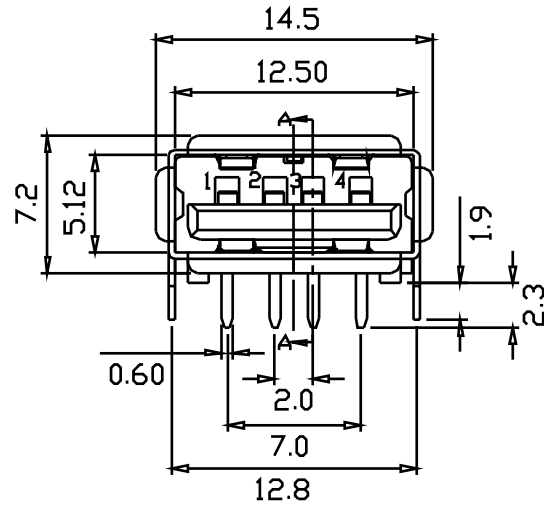

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u"; Ni:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni:80~120u"



Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE		
x. = ± 0.38	x.° ± ---°			USB A TYPE REVERSE 4 PIN DIP		
x.x = ± 0.25	.x° ± ---°					
x.xx = ± 0.13	.xx° ± ---°					
x.xxx = ± 0.05	.xxx° ± ---°		UNIT			
			mm			
DRAWN	TINA	DATE	2010/06/01	PART NO.	USB-SDR01-AB	
SCALE	1:1	SIZE	A4	SHEET	1/1	REV A0