
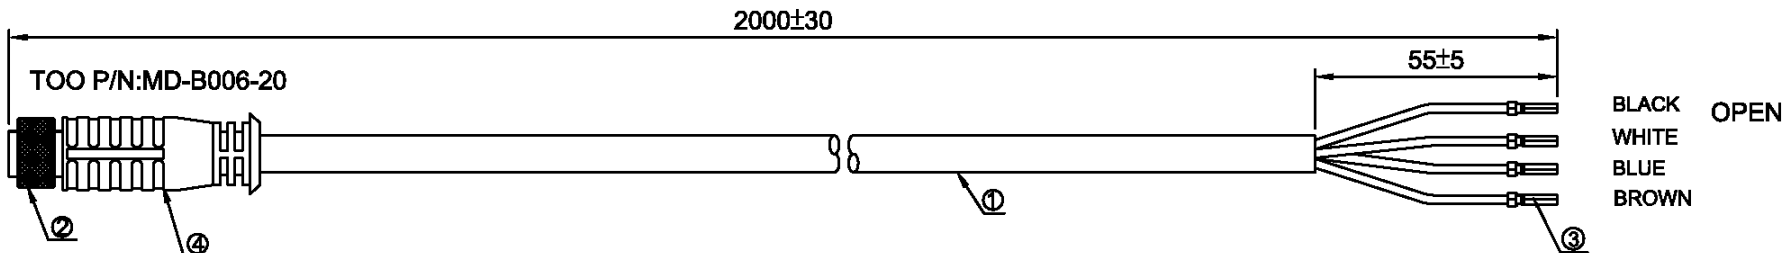


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2010/03//02	

M8 4P FEMALE



- NOTES:
- 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 - 2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE: 1 ohm MAX.

PIN ASSIGNMENT

M8 4P FEMALE	OPEN
1	BROWN
2	WHITE
3	BLUE
4	BLACK

4	1		CONNECTOR OVERMOLD BLUE TPU.
3	1		TERMINAL: TIN PLATED.
2	1		M8 4P FEMALE, SOLDER TYPE.
1	1		23AWG(32/0.1TA)*4C, BLACK PVC JACKET, OD: 4.5MM.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x. = ± Angle .x = ± x ° = .xx = ±				M8 4 P Female stright type cable			
				PART NO. MSC-S4PFSBV			
DRAWN	Kevin	DATE	2010/3/12				
SCALE	1/1	SIZE	A4	SHEET	1/1	REV	A0