


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2010/03/02	

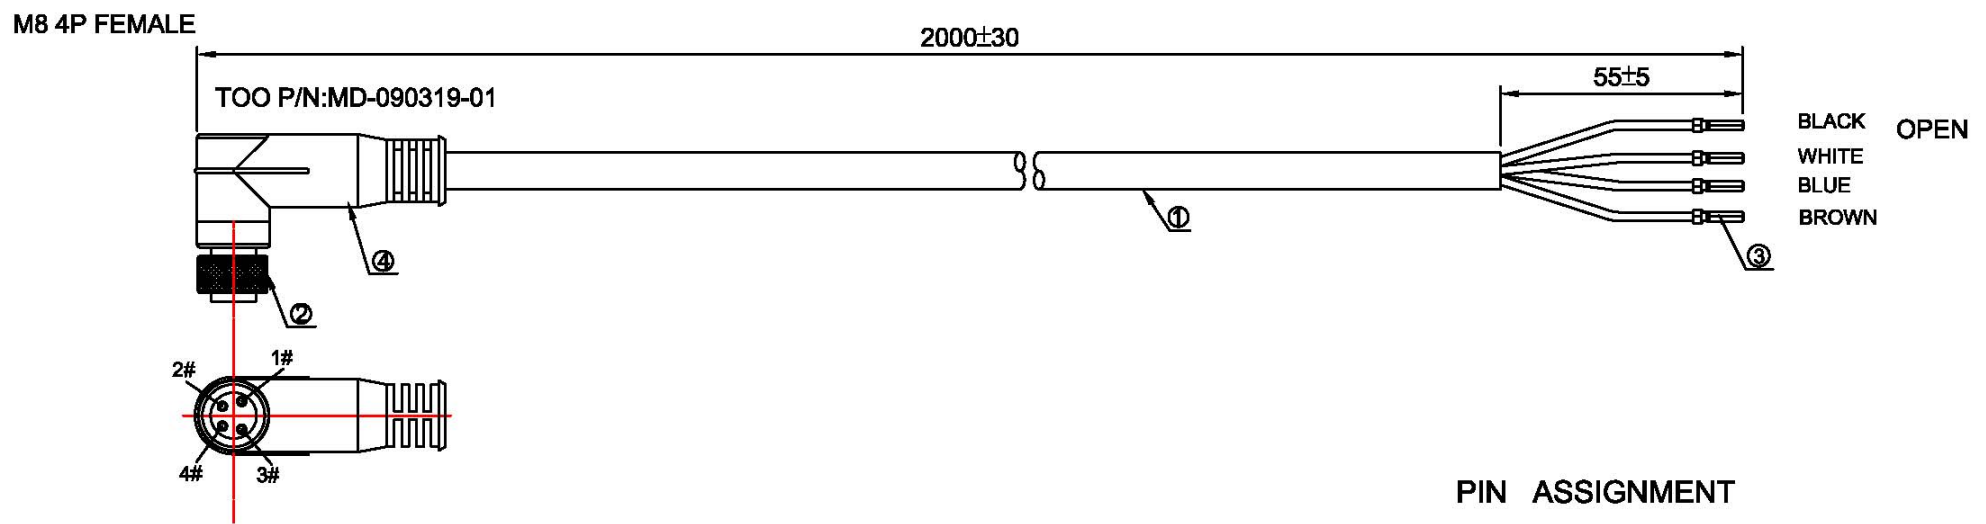

NOTES:
 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 2. ELECTRICAL TEST CONDITION:
 (a). 100% OPEN, SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE: 20 Mohm MIN.
 DC 300V 0.01sec.
 (c). CONTACT RESISTANCE: 1 ohm MAX.

PIN ASSIGNMENT

M8 4P FEMALE	OPEN
1	BROWN
2	WHITE
3	BLUE
4	BLACK

ITEM	QTY	PART NUMBER	DESCRIPTION
4	1		CONNECTOR OVERMOLD BLUE TPU.
3	1		TERMINAL: TIN P LATED.
2	1		M8 4P FEMALE, SOLDER TYPE.
1	1		23AWG(32/0.1TA)*4C, BLACK PVC JACKET, OD:4.5MM.

UNIT	mm	Projection		Se	Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE				
x. = ± Angle				M8 4 P Female right angle type cable				
.x = ± x ° =				PART NO. M8C-S4PFRBV				
.xx = ±				DRAWN Kevin DATE 2010/3/12				
SCALE	1/1	SIZE	A4	SHEET	1/1	REV	A0	