
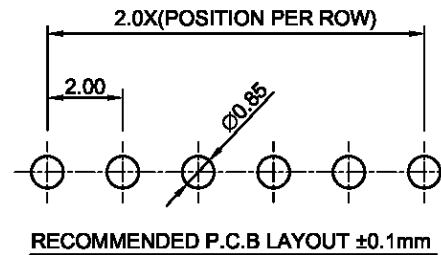


REV.	ECN.	DATE	DWN	APVD

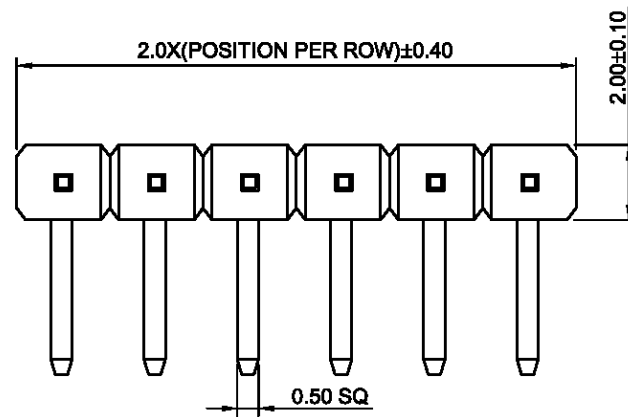

MATERIAL:

INSULATOR : PBT, UL-94V-0.

CONTACT MATERIAL : COPPER ALLOY

FINISH : GOLD OVER NICKEL OR TIN PLATED.

SPECIFICATION:



CURRENT RATING : 1 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 5000MΩ MIN.

CONTACT RESISTANCE : 20MΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +105°C.

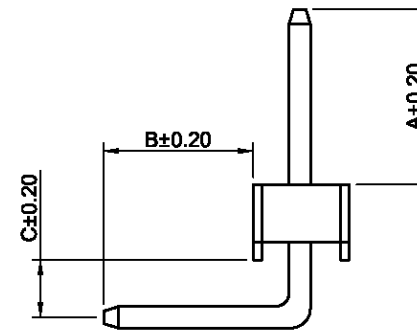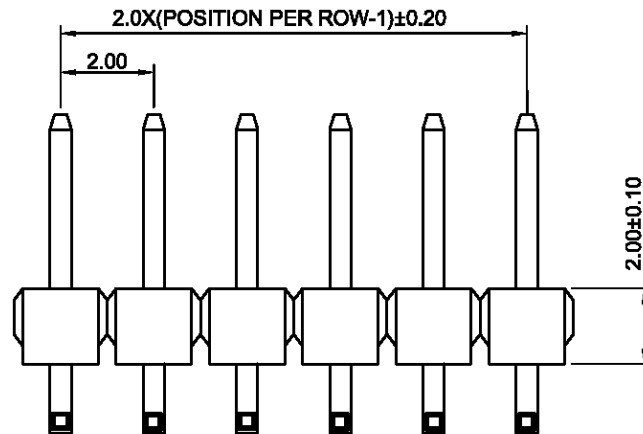

PIN TAIL LENGTH			
CODE	A	B	C
01	3.8	3.0	1.55
02	4.0	2.8	1.15
XX	4.0	1.5	1.5

UNIT	mm	Projection		Secom International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x.x = ±0.25 Angle tolerance = ±1°				2.00mm pitch Pin header Right Angle type			
x.xx = ±0.15 RADIUS 0.25							
x.xxx = ±0.05 Hole 0.13							
				PART NO.	SPR20-102AXX		
DRAWN	Kevin	DATE	2010/3/2				
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A1