


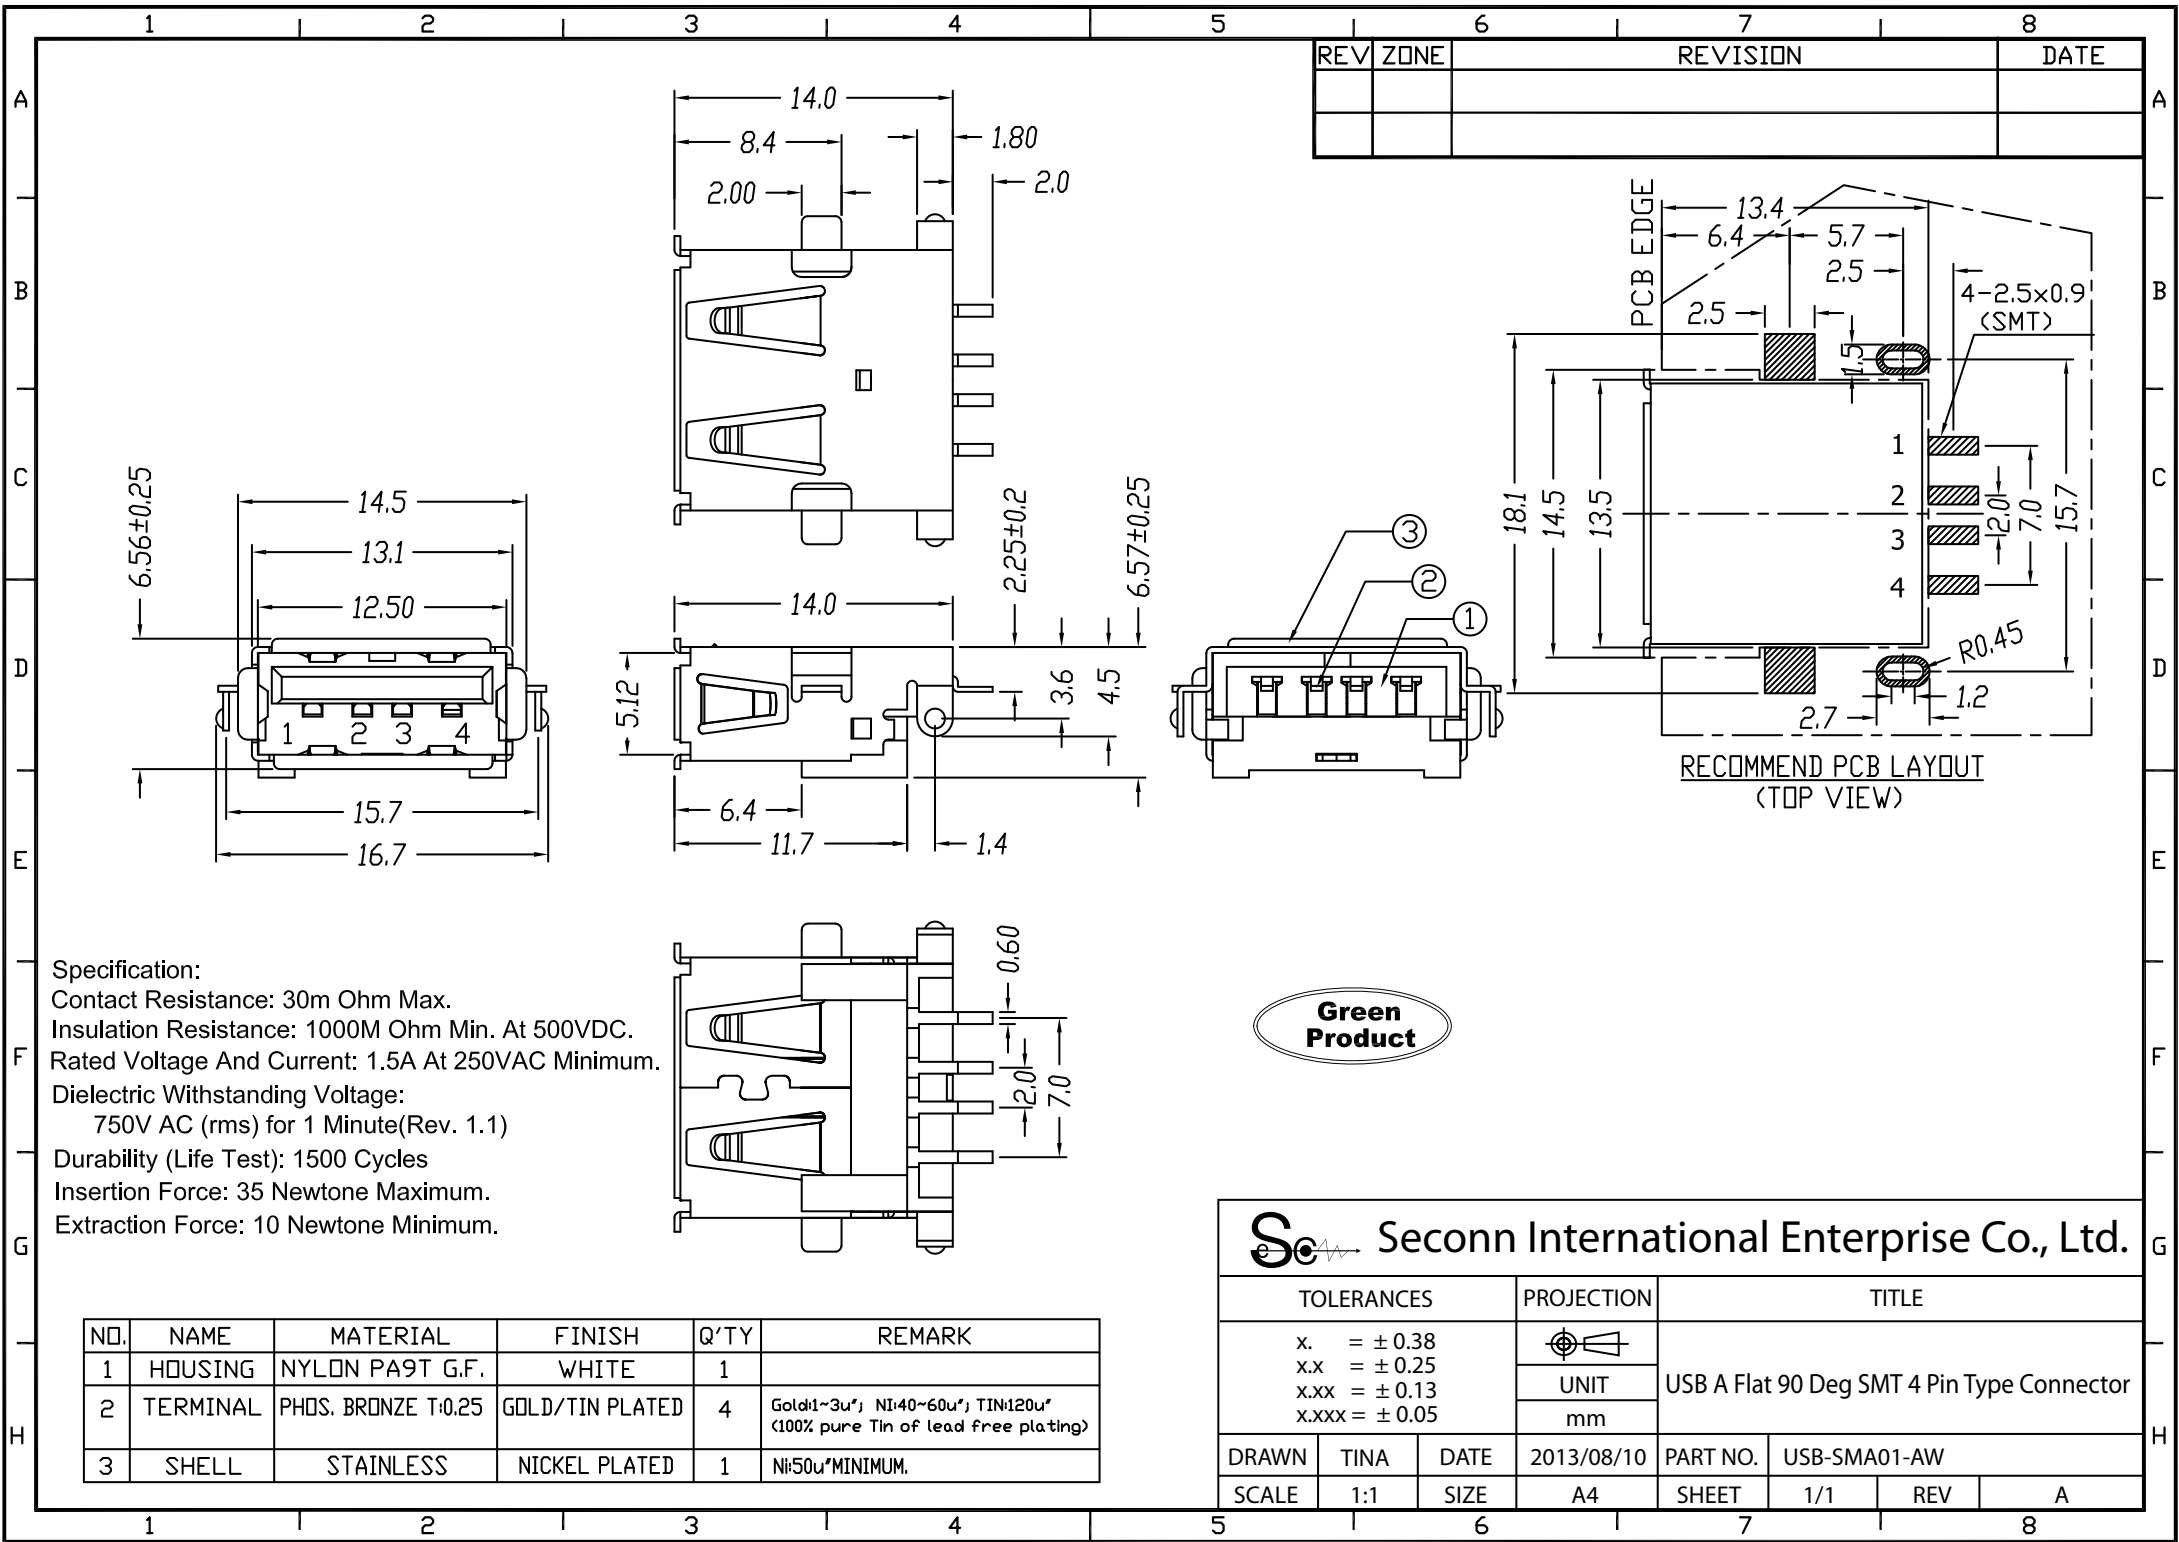

Specification:
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min. At 500VDC.
Rated Voltage And Current: 1.5A At 250VAC Minimum.
Dielectric Withstanding Voltage:
750V AC (rms) for 1 Minute(Rev. 1.1)
Durability (Life Test): 1500 Cycles
Insertion Force: 35 Newton Maximum.
Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	WHITE	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	STAINLESS	NICKEL PLATED	1	Ni:50u"MINIMUM.

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x. = ± 0.38 x.x = ± 0.25 x.xx = ± 0.13 x.xxx = ± 0.05				USB A Flat 90 Deg SMT 4 Pin Type Connector			
			UNIT				
			mm				
DRAWN	TINA	DATE	2013/08/10	PART NO.	USB-SMA01-AW		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A