


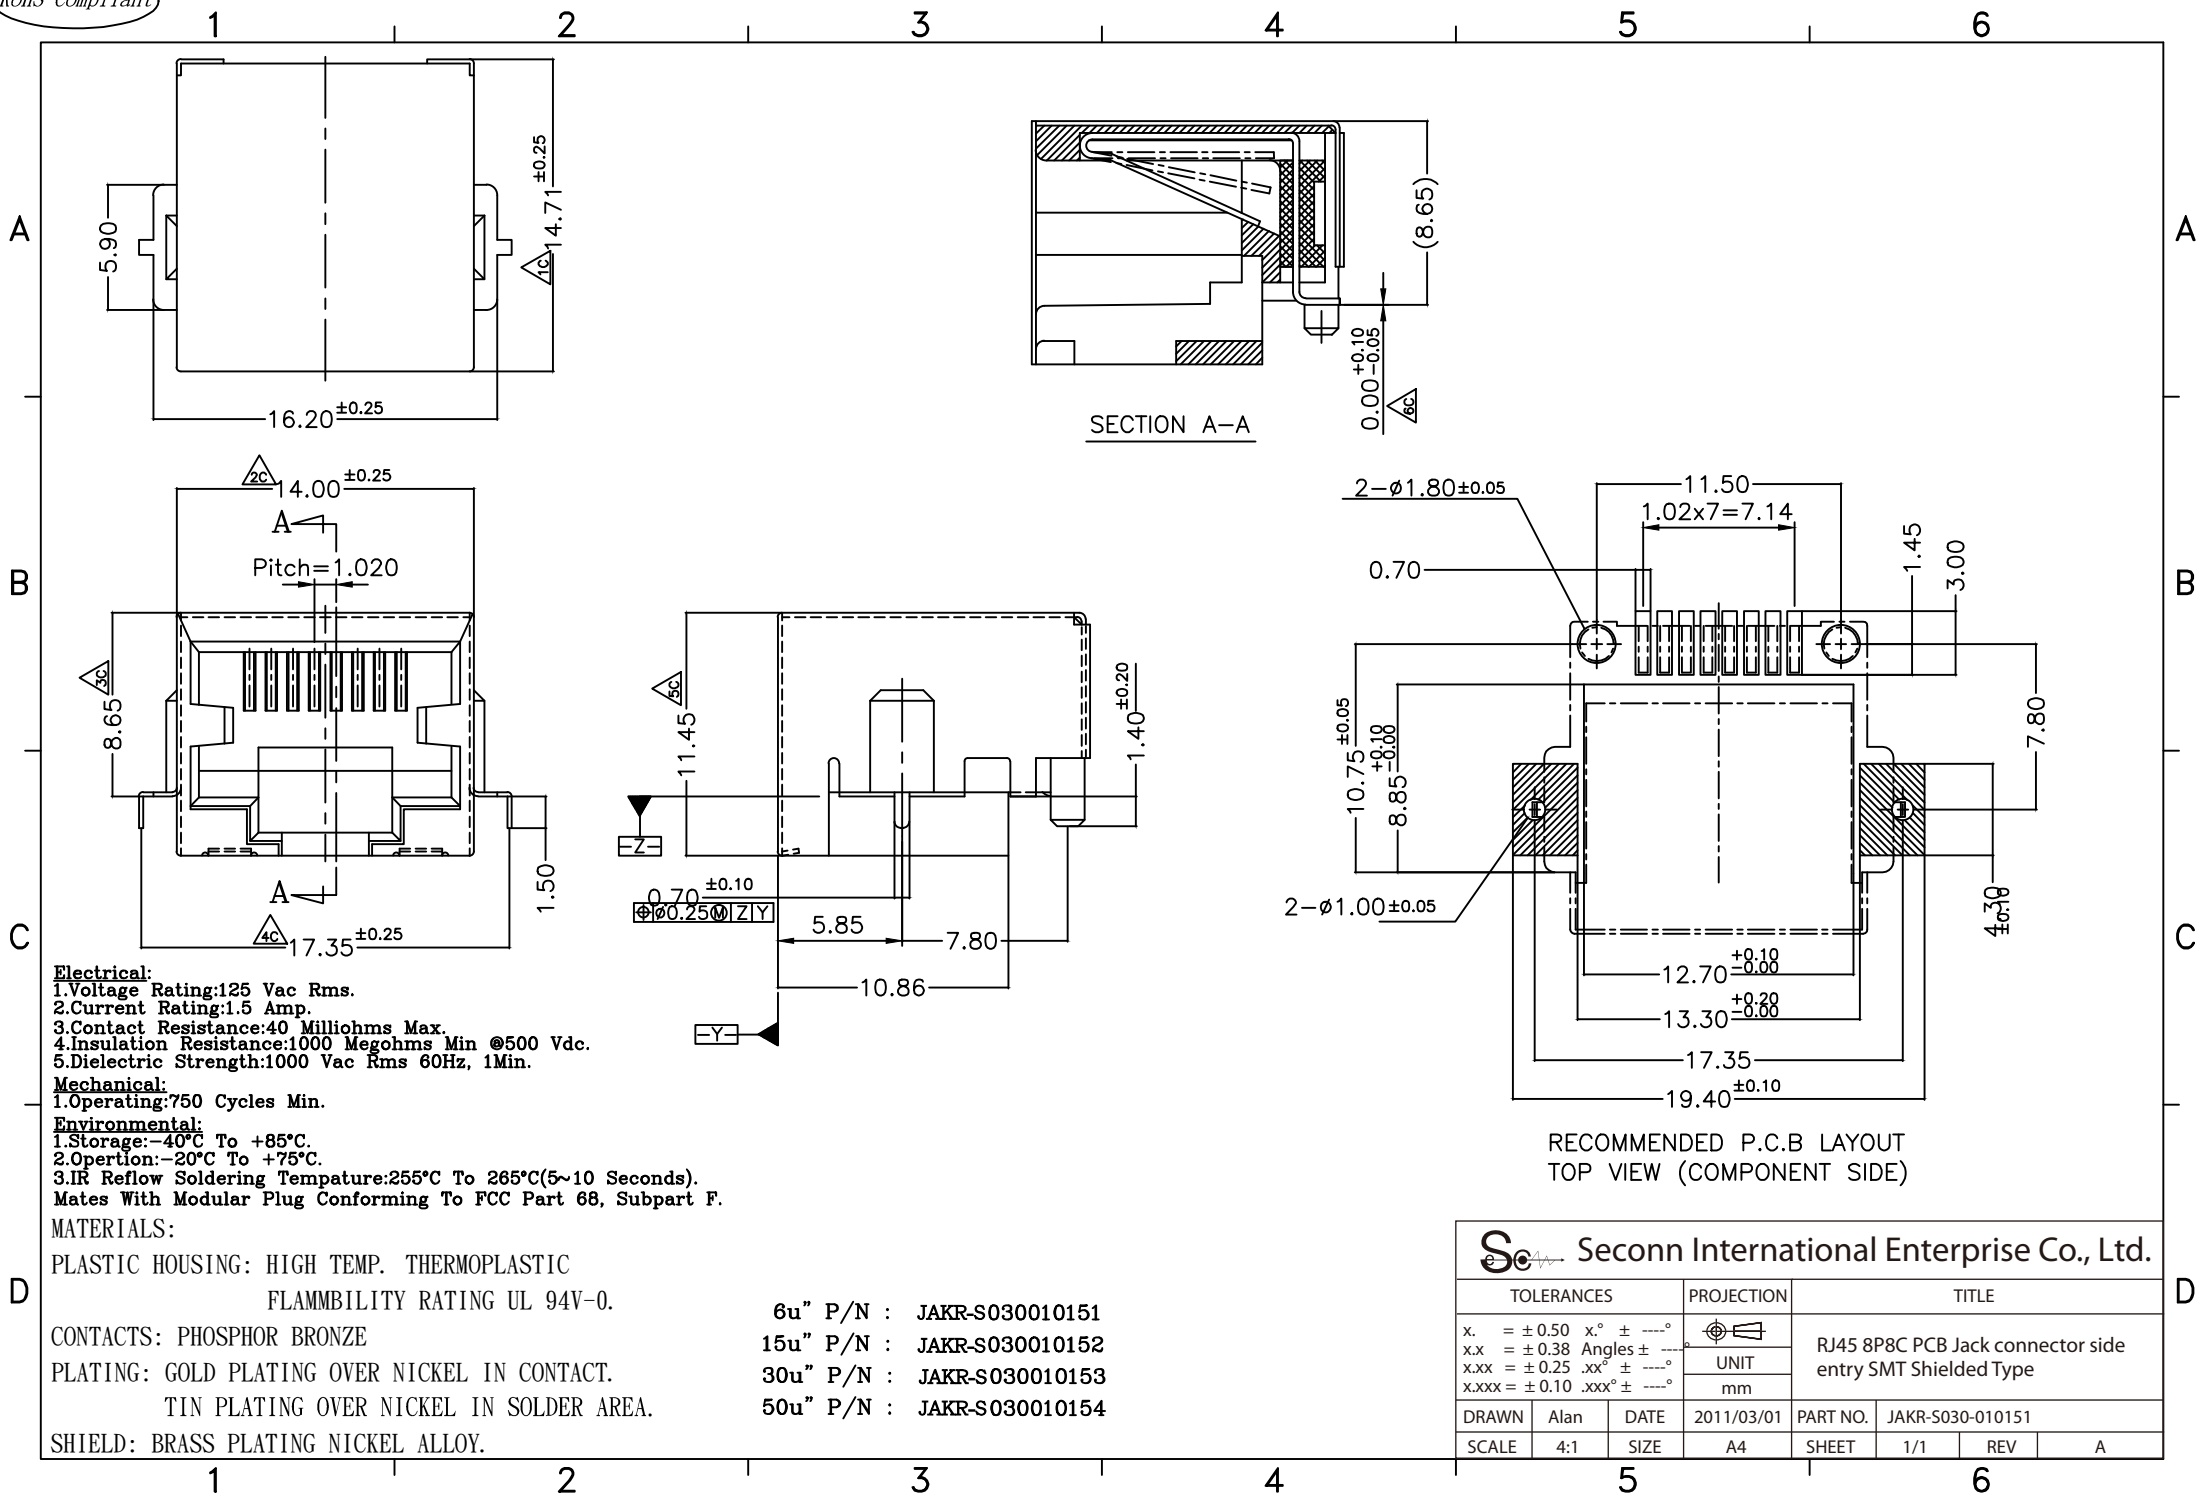

Electrical:
1.Voltage Rating:125 Vac Rms.
2.Current Rating:1.5 Amp.
3.Contact Resistance:40 Milliohms Max.
4.Insulation Resistance:1000 Megohms Min @500 Vdc.
5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:
1.Operating:750 Cycles Min.

Environmental:
1.Storage:-40°C To +85°C.
2.Operation:-20°C To +75°C.
3.IR Reflow Soldering Temperature:255°C To 265°C(5~10 Seconds).
Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

MATERIALS:
PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC
FLAMMBILITY RATING UL 94V-0.
CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.
SHIELD: BRASS PLATING NICKEL ALLOY.

6u" P/N : JAKR-S030010151
15u" P/N : JAKR-S030010152
30u" P/N : JAKR-S030010153
50u" P/N : JAKR-S030010154

Seconn International Enterprise Co., Ltd.							
TOLERANCES			PROJECTION	TITLE			
x. = ± 0.50	x.° ± ---°			RJ45 8P8C PCB Jack connector side entry SMT Shielded Type			
x.x = ± 0.38	Angles ± ---°						
x.xx = ± 0.25	.xx° ± ---°						
x.xxx = ± 0.10	.xxx° ± ---°		UNIT				
			mm				
DRAWN	Alan	DATE	2011/03/01	PART NO.	JAKR-S030-010151		
SCALE	4:1	SIZE	A4	SHEET	1/1	REV	A