


RoHS COMPLIANT


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2010/09/17	
B	ADD LABEL	2010/09/21	

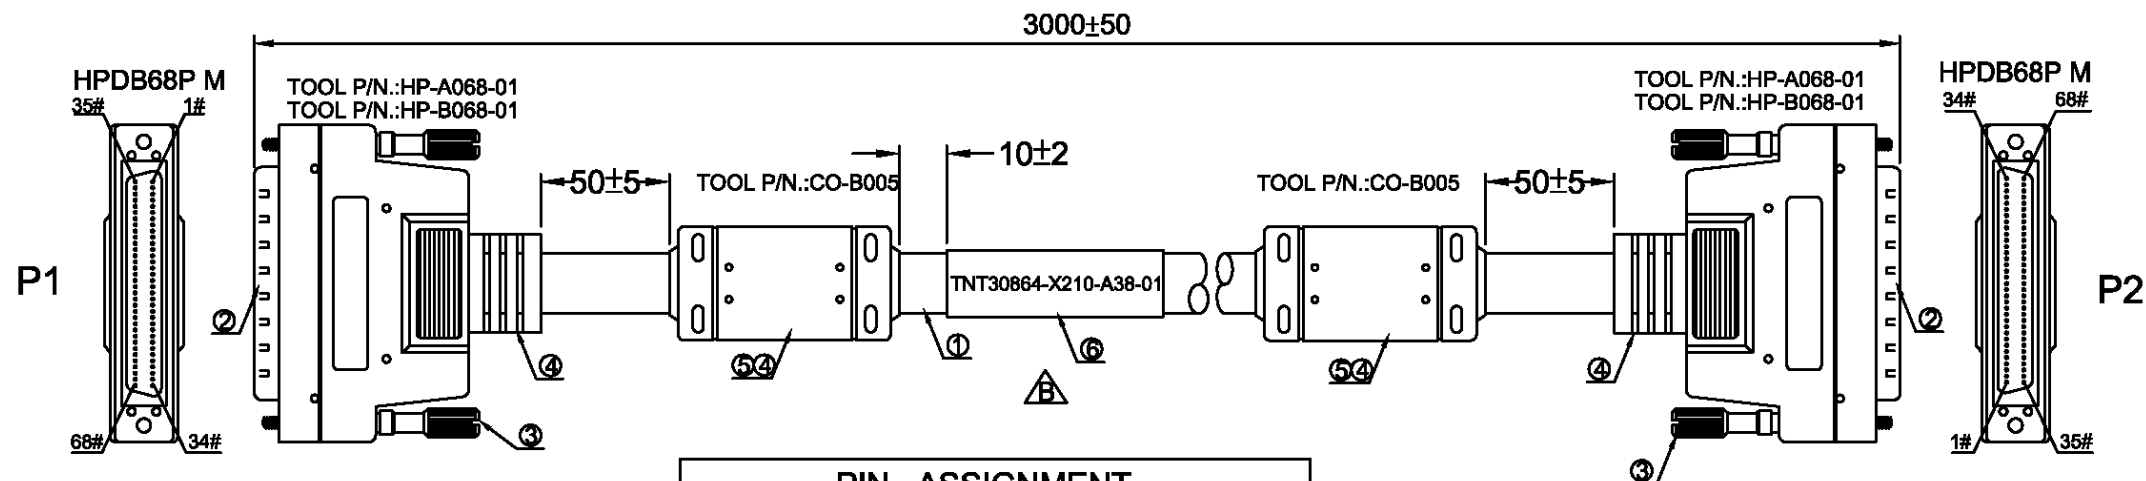

PIN ASSIGNMENT

P1	P2	P1	P2
1	1	18	18
35	35	52	52
2	2	19	19
36	36	53	53
3	3	20	20
37	37	54	54
4	4	21	21
38	38	55	55
5	5	22	22
39	39	56	56
6	6	23	23
40	40	57	57
7	7	24	24
41	41	58	58
8	8	25	25
42	42	59	59
9	9	26	26
43	43	60	60
10	10	27	27
44	44	61	61
11	11	28	28
45	45	62	62
12	12	29	29
46	46	63	63
13	13	30	30
47	47	64	64
14	14	31	31
48	48	65	65
15	15	32	32
49	49	66	66
16	16	33	33
50	50	67	67
17	17	34	34
51	51	68	68
S	S	S	S

EVC MALE SCREW DETAIL

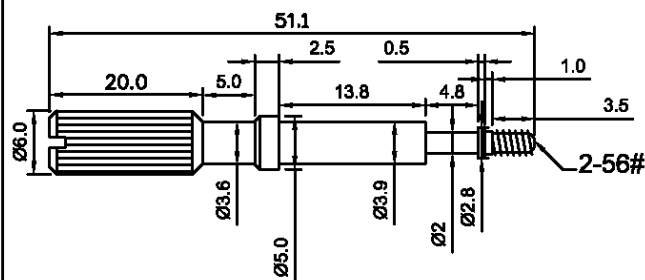

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.02sec,
 - CONTACT RESISTANCE: 3 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
6	1		LABEL.
5	2	T0011	FERRITE CORE: 17.5*28.5*10.0MM.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	4	C0176	SCREW 2-56# 6.0*51.1MM, NICKEL PLATED.
2	2	A0141	HPDB68P MALE BALCK INSULATOR, I.D.C TYPE.
1	1	E0686	30AWG*34P+NWF+AL+DRAIN+BRAID OD:9.5MM PVC BLACK JACKET UL20276.

UNIT	mm	Projection	Se	Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
X. = ± .X = ± .XX = ±				HPDB68 P SCSI male to male cable, 2~56# screw molding Type			
DRAWN Kevin DATE 2010/9/17				PART NO. SCSIC-S68PMMSM			
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0