

REVISION			
NO.	DESCRIPTION	DATE	REV.

NOTE:

1.MATERIAL:

- 1.1 HOUSING: THERMOPLASTICS ,BLACK UL94V-0
- 1.2.TERMINAL:PHOSPHOR BRANZE
GOLD ON CONTACT AREA AND TIN ON SOLDER AREA
- 1.3.SHELL:BRASS NICKEL PLATED






2.ELECTRICAL SPECIFICATION:

- 2.1. CURRENT RATING: 1 AMPERES AT 250V AC
- 2.2. DIELECTRIC WITHSTANDING VOLTAGE:AC 750V AT SEA LEVEL
- 2.3. INSULATION RESISTANCE:100MEGOHMS MIN
- 2.4. CONTACT RESISTANCE:50MILIOHMS MAX
- 2.5. OPERATING TEMPERATURE:-55° TO +85°C

3.MECHANICAL CHARACTERISTICS:

- 3.1. MATING FORCE:3.57Kg MAX
- 3.2. UNMATING FORCE:0.70Kg MIN./0.30 Kgf MIN AFTER 5000 CYCLES

4.ORDER INFORMATION:

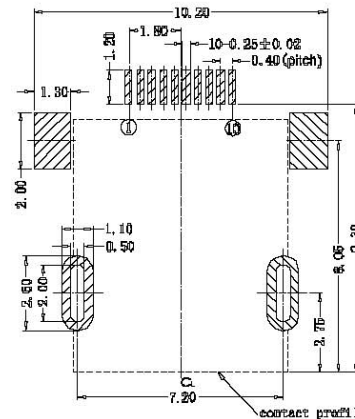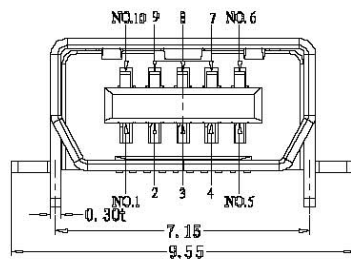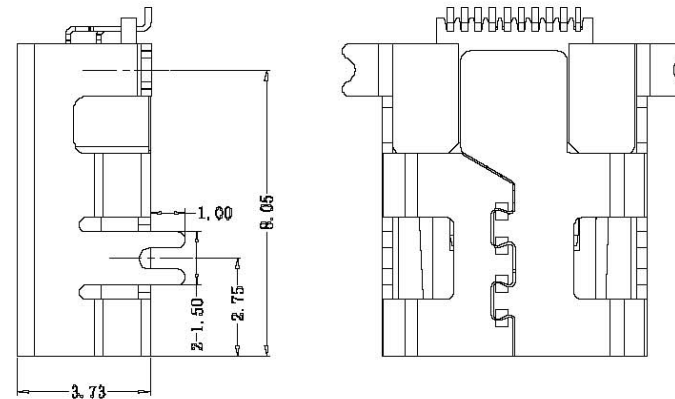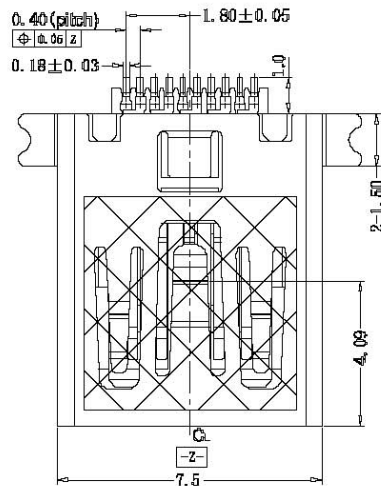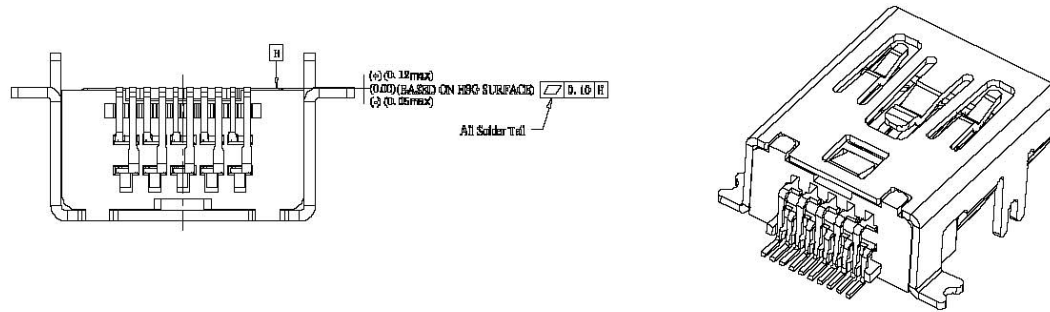

Recommended P.C.B Layout(Top Side)
Tolerance=±0.05

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x.x = ±0.3 General Angle ± 3° x.xx = ± 0.15 .xx = ± .xxx=±				Mini USB 10 pin female SMT Type Connector Black color			
				PART NO.		MUSB-SFM10B	
DRAWN	Kevin	DATE	2009/11/15				
SCALE	1/1	SIZE	A4	SHEET	1/1	REV	A1