
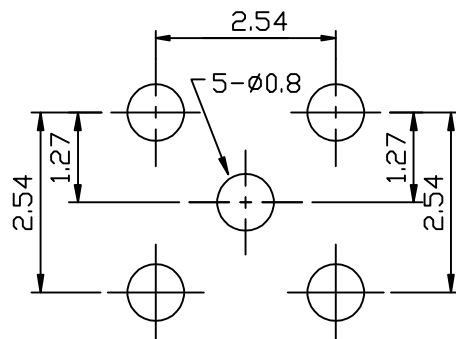
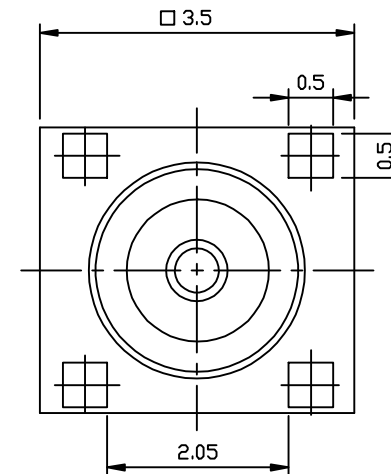


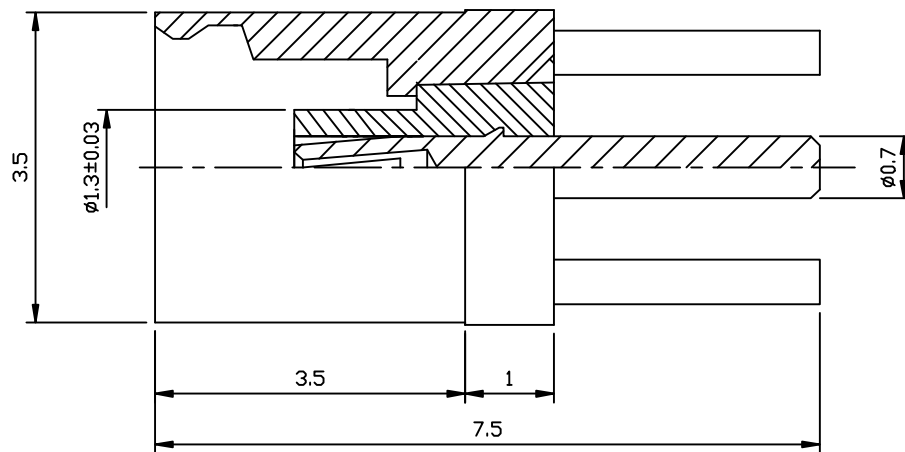

ELECTRICAL:
 IMPEDANCE: 50 Ω HM
 FREQUENCY Range: 0-6 GHz
 VSWR: 1.25 MAX
 Temperature Range: -65C~165C

3	PIN	BERY CU	GOLD 3u"	1	
2	INSULATOR	PTFE	NONE	1	
1	BODY	BRASS	GOLD FLASH	1	
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

UNITS	m/m	DRAWN	Seconn International Enterprise Co., Ltd.
Unless Otherwise Specified		CHECKED	TITLE.
Tolerances		APPROVED	MMCX Female 7.5L P.C.B. 50OHM connector
ANGLES = ± 3			PART NO. MMCX-S0404-50OHM
UP TO 6 = ± 0.1			File No.
6-40 = ± 0.2			
40-120 = ± 0.6			
120-315 = ± 1.0			
ABOVE 315 = ± 1.6			
SCALE	15/1	DATE	
ISSUE	A	97/03/04	