


ROHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/05/05	

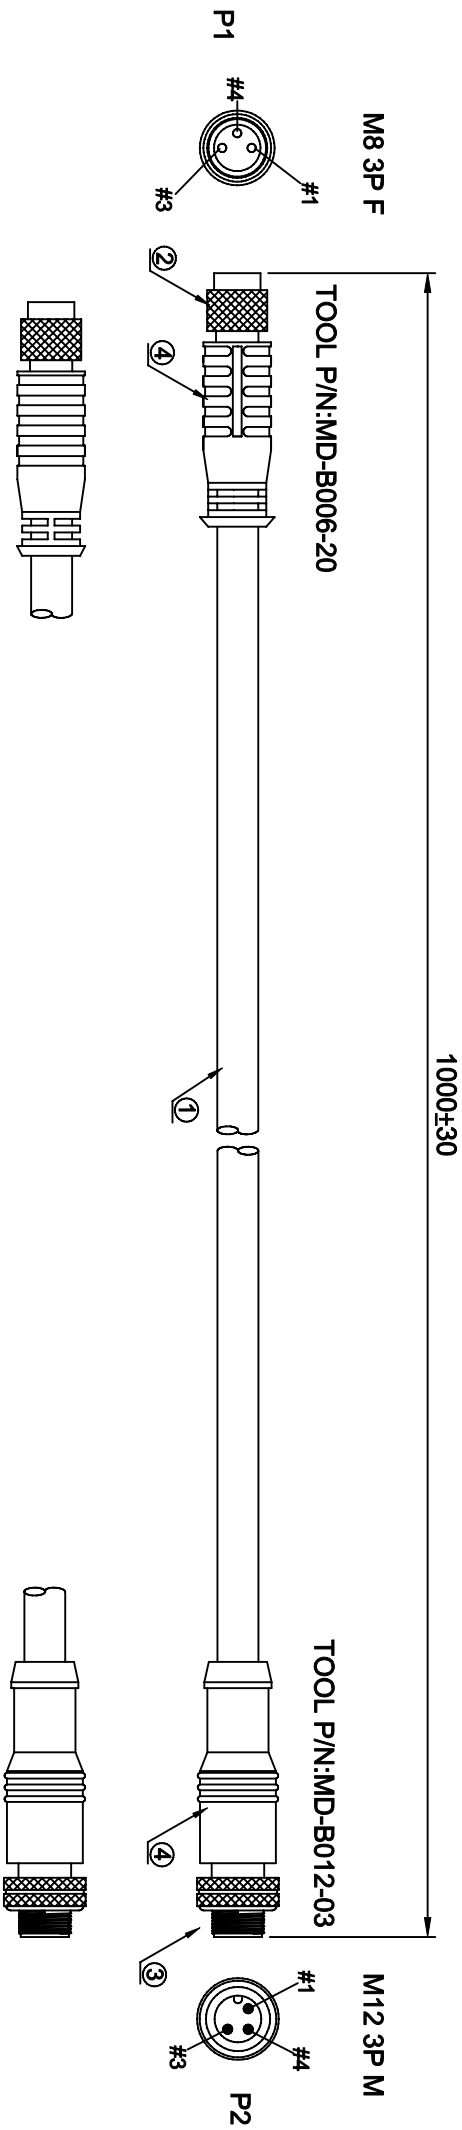

PIN ASSIGNMENT

M8 3P F M12 3P M

1 _____ 1
3 _____ 3
4 _____ 4
SHELL _____ SHELL

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE: 3 ohm MAX.

4		G0107	ALL CONNECTORS OVERMOLD BLACK PA.
3	1		M12 3PIN MALE, BLACK INSULATOR, SOLDER TYPE, WITH SHELL.
2	1		M8 3PIN FEMALE, BLACK INSULATOR, SOLDER TYPE, WITH SHELL.
1	1		24AWG*3C+AD, OD: 3.7MM, BLACK PVC JACKET, UL2464.
ITEM QTY	PART NUMBER	DESCRIPTION	

UNIT	mm	Projection			Secom International Enterprise Co., Ltd.	
DRAWN	Yi Jialu	SCALE	1:1		TITLE	
CHECK, BY	Caojiawei	REV	A		M8 3P F TO M12 3P M CABLE 1M LENGTH	
APP, BY	Wu. Huang	DATE	2011/05/05		TOLERANCES	
DWG NO.	SE-S-0024				X. = ±	.X = ±
PART NO.	M8 3P F TO M12 3P M CABLE-1M				SHEET	1/1
					SIZE	A4