


ROHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/05/05	

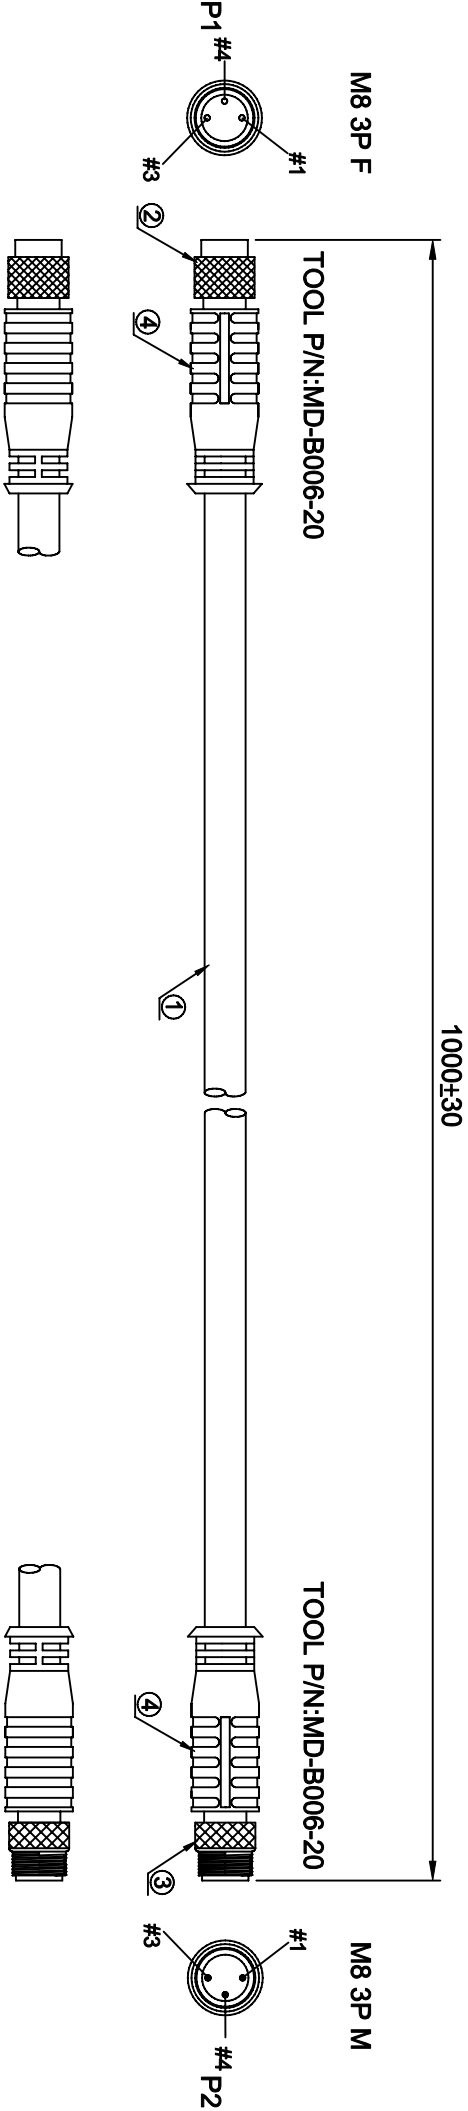

PIN ASSIGNMENT

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.

2. ELECTRICAL TEST CONDITION:

(a).100%OPEN,SHORT & MISWIRE TEST,

(b). INSULATOR RESISTANCE:20 Mohm MIN.

DC 300V 0.01sec.

(c). CONTACT RESISTANCE:3 ohm MAX.

M8 3P F M8 3P M

1 _____ 1

3 _____ 3

4 _____ 4

SHELL _____ SHELL

4		G0107	ALL CONNECTORS OVERMOLD BLACK PA.
3	1		M8-3PIN MALE, BALCK INSULATOR,SOLDER TYPE, WITH SHELL.
2	1		M8-3PIN FEMALE, BALCK INSULATOR,SOLDER TYPE, WITH SHELL.
1	1		24AWG*3C+AD, OD:3.7MM, BLACK PVC JACKET, UL2464.
ITEM QTY	PART NUMBER	DESCRIPTION	

UNIT	mm	Projection			Secom International Enterprise Co., Ltd.			
DRAWN	Yi jialu	SCALE	1:1		TITLE			
CHECK,BY	Caojiawu	REV	A		M8 3P M/F CABLE 1M LENGTH			
APP,BY	Wu. Huang	DATE	2011/05/05		TOLERANCES			
DWG NO.	SE-S-0023				X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	M8 3P M/F CABLE-1M				SHEET	1/1	SIZE	A4