


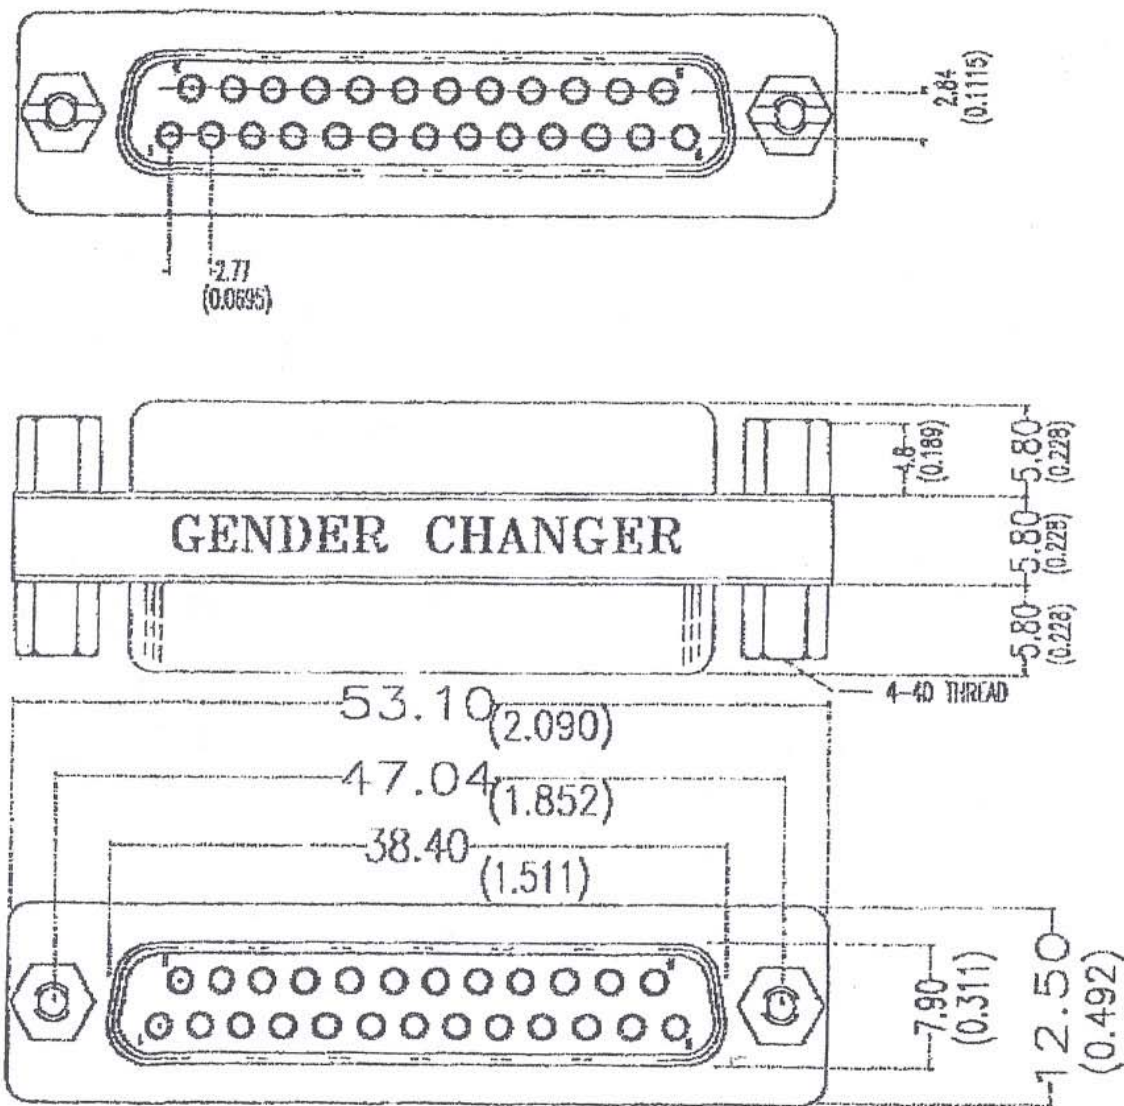

SPECIFICATION:

SHELL:

Steel, Zinc plated or Tin plated.

PIN CONTACT:

Gold plated over nickel.

INSULATOR:

PBT Glass fibre reinforced
UL 94 VO

CURRENT RATING:

5 AMP

DIELECTRIC STRENGTH:

1000V for one minute

INSULATOR RESISTANCE:

1000M Min at 500V DC

TEMPERATURE:

-55° C -- +105° C

UNIT	mm	Projection		Secon International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
xx. = ± x.xx = ± x.xxx = ±				MINI Gender Charger 25 pin Female Type			
				PART NO.		MGC-SDB25F	
DRAWN	Kevin	DATE	2007/12/20				
SCALE	2:1	SIZE	A4	SHEET	1/1	REV	A1