

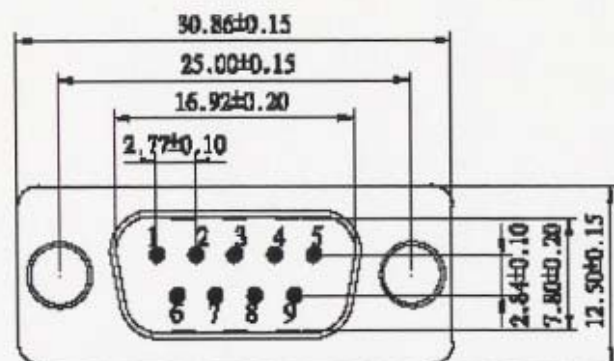
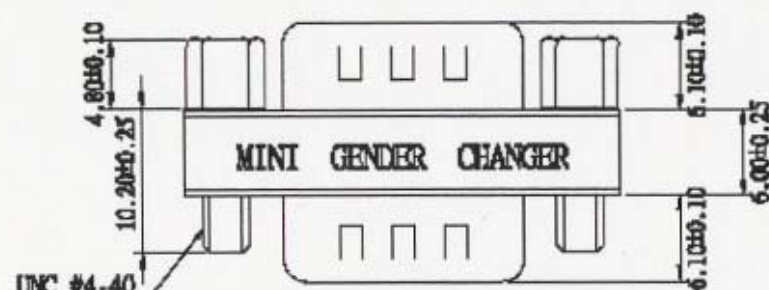


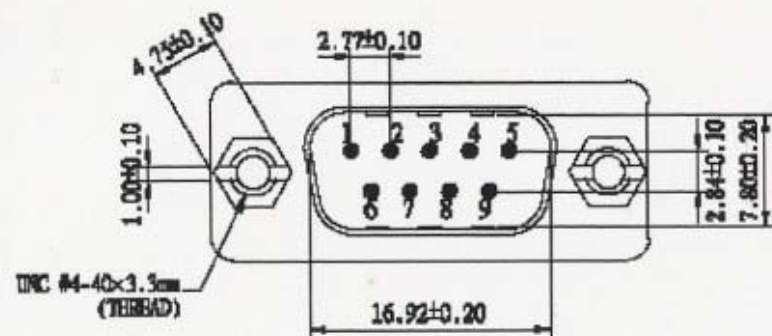

UNC #4-40 Hexscrew



DGC 09 M/M GENDER CHANGER

PIN OUT: 9Male

9Male

1	-----	1
2	-----	2
8	-----	8
9	-----	9
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one Minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C +105°C

Customer	REVISION	DESCRIPTION	DATE
	2	修改规格(铜杆5.2mm改为6.2mm)	2003/06/30
	1	修改规格(R.O.C. PATENT 54341 改为 MINI GENDER CHANGER)	2001/11/30

UNIT	mm	Projection	Seconn International Enterprise Co., Ltd.
TOLERANCES			
x.x - ±0.2			
x.xx - ±0.15			
x.xxx - ±0.05			
DRAWN	Kevin	DATE	2001/12/5
SCALE	2:1	SIZE	A4
SHEET			
1/1			
REV			
A1			