

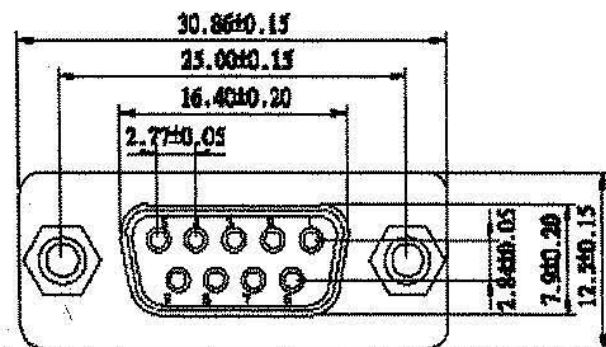
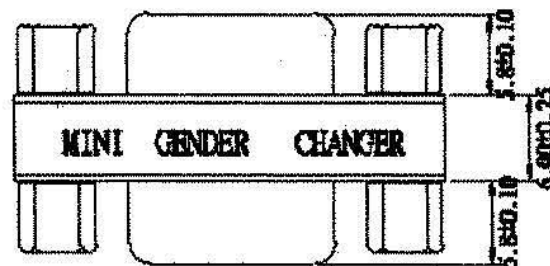


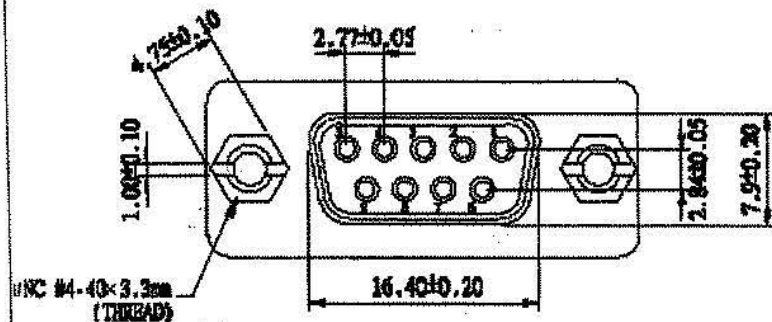

UNC #4-40 Hexscrew UNC #4-40 Hexnut

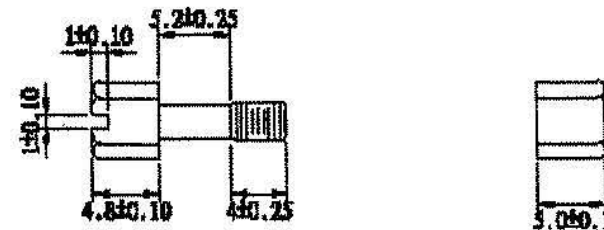

DGC 09 F/F GENDER CHANGER

PIN OUT: 9Female

9Female

1	-----	1
2	-----	2
8	-----	8
9	-----	9
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 VO

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C—+105°C

1	MINI GENDER CHANGER (R.O.C. PATENT 64341)	2001/12/5	
REVISION	DESCRIPTION	DATE	

UNIT	mm	Projection		Secon International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x.x = ±0.2 x.xx = ± 0.15 x.xxx = ±0.05				MINI Gender Charger 9 pin Female Type			
				PART NO. MGC-SDB09F			
DRAWN	Kevin	DATE	2001/12/5				
SCALE	2:1	SIZE	A4	SHEET	1/1	REV	A1