


RoHS COMPLIANT

DESCRIPTION CONTROL			
C	CHANGE LENGTH	2011/01/13	
D	CHANGE DRAWING	2011/01/15	
REV	DESC	DATE	APP
A	FIRST RELEASE	2010/11/29	
B	CHANGE CONNECTOR	2010/12/10	

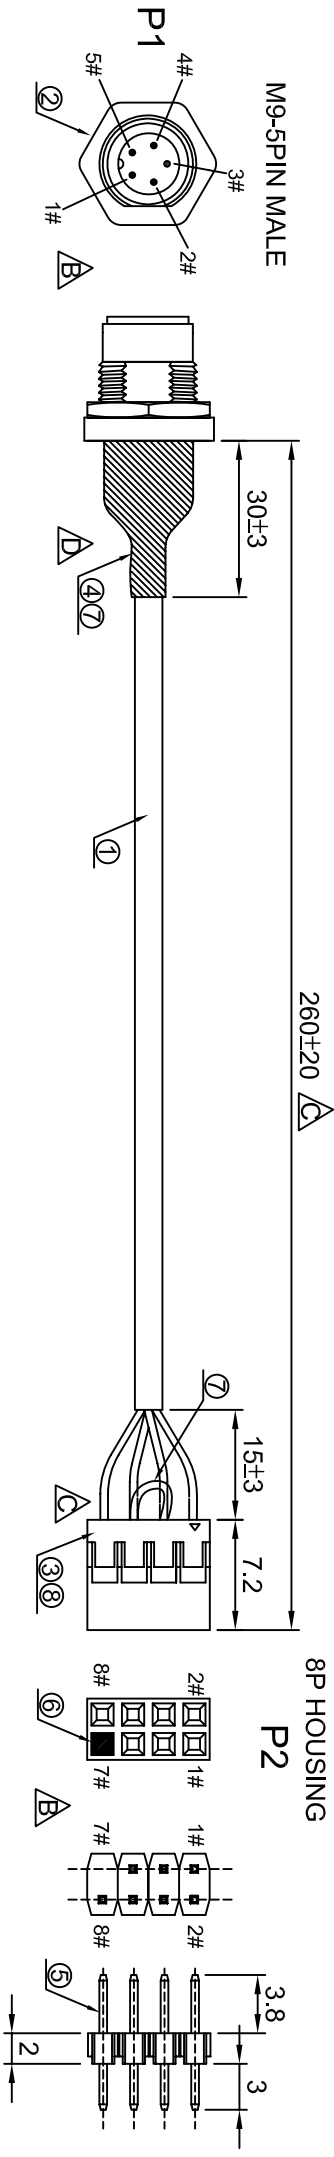


NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE:3 ohm MAX.

8	12	PITCH 2.0MM TERMINAL.	
7	4	28AWG BLACK HOOK-UP WIRE.	
6	2	BLACK PLASTIC KEY.	
5	2	2.0mm CENTER MINI LATCH HEADERS	
4		HEAT SHRINK TUBE:BLACK.	
3	2	8P HOUSING PITCH 2.0MM	
2	2	M9-5PIN MALE,BLACK INSULATOR, PANEL SOLDER TYPE.	
1	2	28AWG*5C OD:3.8mm BLACK JACKET UL2990.	
ITEM	QTY	PART NUMBER	DESCRIPTION

PIN ASSIGNMENT

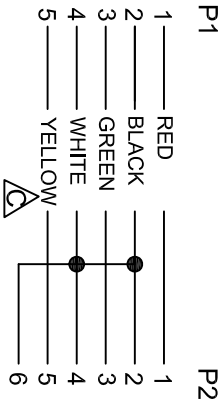

NOTES:

- TWO CABLES PACKAGED IN A PE BAG.
- ALL MINI LATCH HEADERS PACKAGED IN A PE BAG.

UNIT	mm	Projection	Scale	1:1	Seconn International Enterprise Co., Ltd.
DRAWN	Yi jialu	SCALE	1:1		TITLE
CHECK,BY		REV	D		2*M9 5P M TO 8P HOUSING & PIN HEADER-26CM
APP,BY		DATE	2011/01/13		TOLERANCES
DWG NO.	MI-S-0077				X.= ± .X= ± .XX= ± .XXX= ±
PART NO.	2*M9 5P M TO 8P HOUSING & PIN HEADER-26CM	SHEET	1/1	SIZE	A4