


ROHS COMPLIANT


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2010/11/29	
B	CHANGE CONNECTOR	2010/12/10	
C	ADD QUANTITY	2011/01/15	

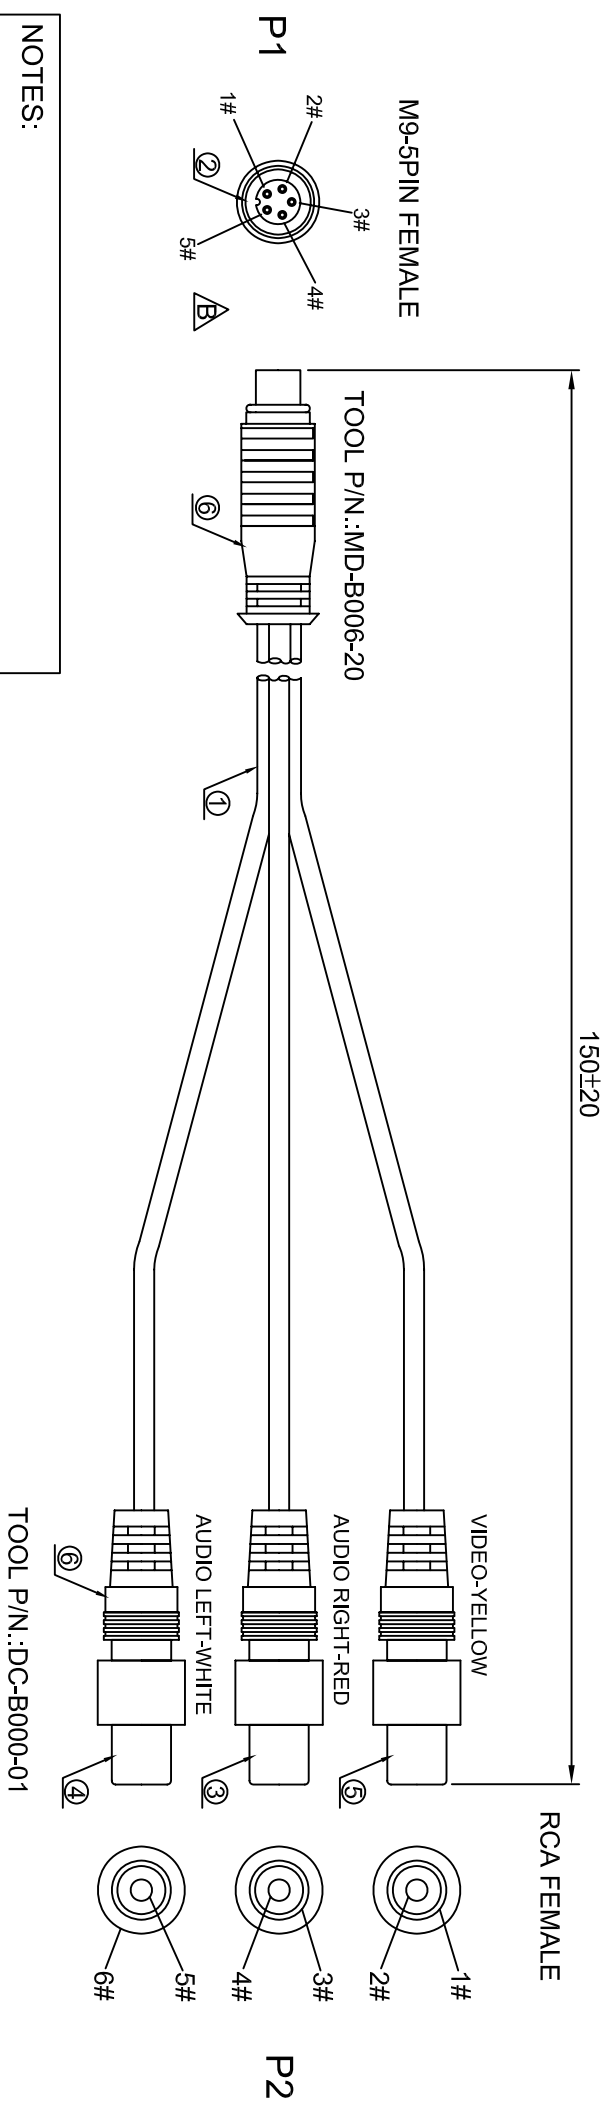

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN, DC 300V 0.01sec.
 - CONTACT RESISTANCE:3 ohm MAX.

PIN ASSIGNMENT

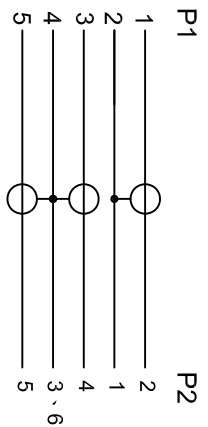

NOTES:

- TWO CABLES PACKAGED IN A PE BAG.

ITEM	QTY	PART NUMBER	DESCRIPTION
6		G0001/G0002 /G0014/G0020	ALL CONNECTORS OVERMOLD BLACK&WHITE&YELLOW&RED PVC.
5	2		RCA FEMALE GOLD PLATED, SOLDER TYPE, YELLOW COLOR.
4	2		RCA FEMALE GOLD PLATED, SOLDER TYPE, WHITE COLOR.
3	2		RCA FEMALE GOLD PLATED, SOLDER TYPE, RED COLOR.
2	2		M9-5PIN/F, BLACK INSULATOR, SOLDER TYPE.
1	2	E0080	28AWG*1C-S OD:2.5mm BLACK JACKET, UL1354

UNIT	mm	Projection	1:1	Scale	1:1	DATE	2010/12/10	
DRAWN	Yi jialu	SCALE	1:1	CHECK, BY	REV	C	APP, BY	DATE
DWG NO.	MI-S-0076	X. = ± .X = ± .XX = ± .XXX = ±						
PART NO.	2*M9 5P F TO 3*RCA F-15CM	SHEET 1/1 SIZE A4						

Seconn International Enterprise Co., Ltd.

TITLE

2*M9 5P F TO 3*RCA F-15CM

TOLERANCES