
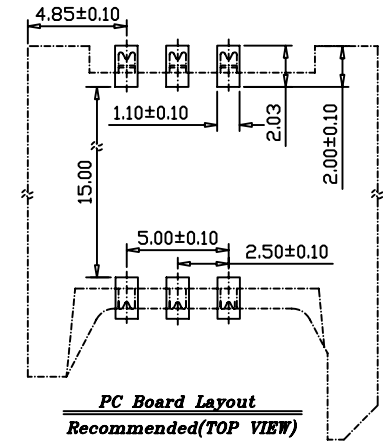
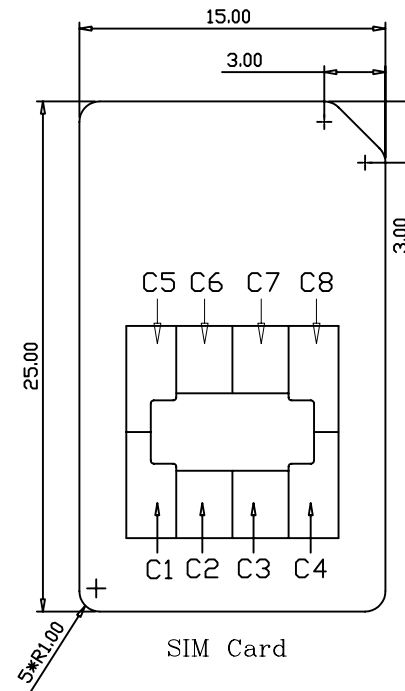


| REV. | DATE       | ECN NO. | MODIFICATION | APPROVER |
|------|------------|---------|--------------|----------|
| A    | 2015/12/16 | /       | NEW          | Vicky    |

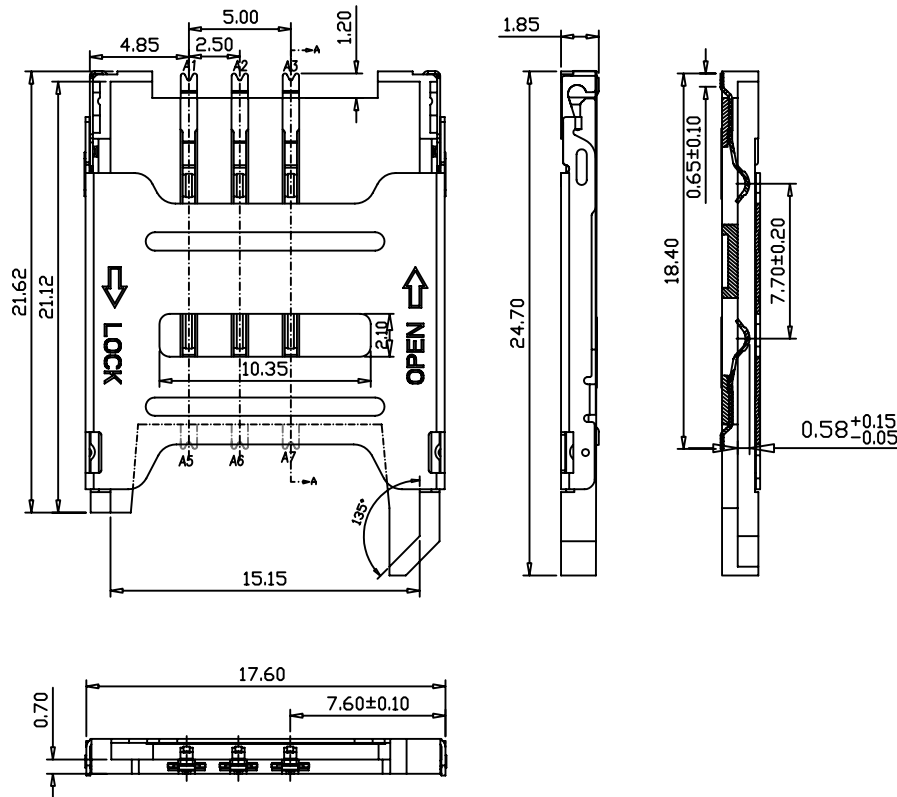

| PIN NO. | PIN NAME |
|---------|----------|
| A1      | VCC      |
| A2      | RST      |
| A3      | CLK      |
| A4      | Reserved |
| A5      | GND      |
| A6      | VPP      |
| A7      | I/O      |
| A8      | Reserved |

#### NOTES:

##### 1.SPECIFICATIONS

INSULATION RESISTANCE: 100M min.AT DC 250V DC  
 WITHSTANDING VOLTAGE: 100V ACrms FOR 1 MINUTE  
 CONTACT RESISTANCE: 100m Ohm max. AT 10MA/20mV max  
 CURRENT RATING: 1 A  
 VOLTAGE RATING: 250 Volts AC(rms.) Max  
 OPERATING TEMP.RANGE:-55°C~+105°C  
 MATING CYCLES: 5000 INSERTIONS

##### 2.MATERIAL:

Housing: LCP,UL 94V-0,COLOR"BLACK  
 TERMINAL: COPPER ALLOY (C5210)  
 SHELL: STAINLESS STEEL (SUS)  
 LATCH: STAINLESS STEEL (SUS)

##### 3.FINISH:

TERMINAL:50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD  
 PLATING ON CONTACT ARER, Sn ON SOLDER TAIL.

|                                                                                                                                        |     |      |                                                                                                     |          |                                                                   |     |   |
|----------------------------------------------------------------------------------------------------------------------------------------|-----|------|-----------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------|-----|---|
|  <b>Seconn International Enterprise Co., Ltd.</b> |     |      |                                                                                                     |          |                                                                   |     |   |
| TOLERANCES                                                                                                                             |     |      | PROJECTION                                                                                          |          | TITLE                                                             |     |   |
| x.x = ± 0.25<br>x.xx = ± 0.15<br>x.xxx = ± 0.05                                                                                        |     |      | <br>UNIT<br>mm |          | SIM Card connector 2.54mm 6 Pin<br>H: 1.8mm Hinged Cover Ear Clip |     |   |
| DRAWN                                                                                                                                  | Cmy | DATE | 2015/12/16                                                                                          | PART NO. | SIM-SM06OH18R                                                     |     |   |
| SCALE                                                                                                                                  | 1:1 | SIZE | A4                                                                                                  | SHEET    | 1/1                                                               | REV | A |