

NOTES

1.MATERIAL:

SPACE: NYLON 46 (UL94V-0)

P: PPS

CONTACT: PHOSPHOR BRONZE

2.PLATING: 1.TIN/LEAD 120u" MIN
OVER NICKEL 50U".

G : RoHS (Sn 100u" over Ni 50u") SEE NOTE 1.

3.PACKING: SPACE NORMAL: TUBE

R: TAPE & REEL

4.DIM A=1mm*(CKT-1)

DIM B=DIM A+2.1mm

DIM C=DIM A+4mm

5.PART NO:

FPCX-XX X S X-X-X

CKT: 3 to 38



0:HORIZONTAL
1:VERTICAL

SMT TYPE




SEE NOTE 3.

SPACE: NORMAL
W: REVERSE


SEE NOTE 2.

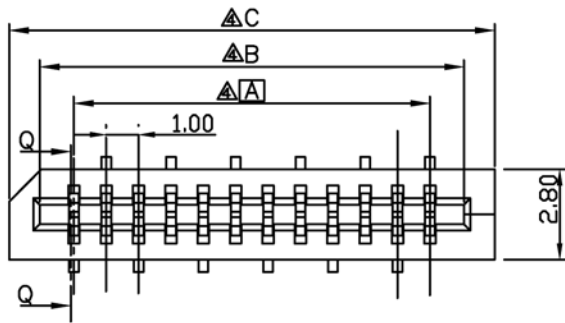

FFC/FPC DIMENSION
THICKNESS 0.26~0.32mm
TOLERANCE: 0.05mm

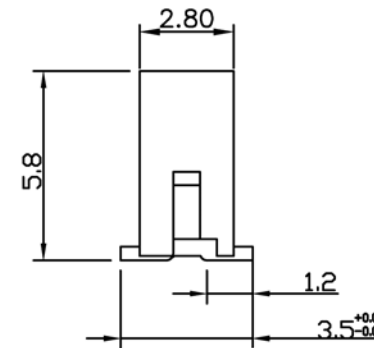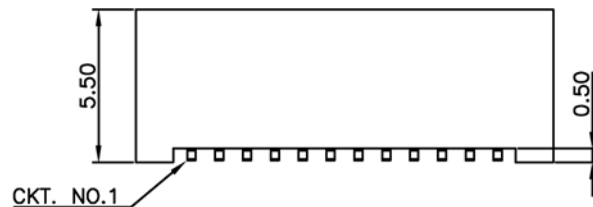

Q-Q SECTION

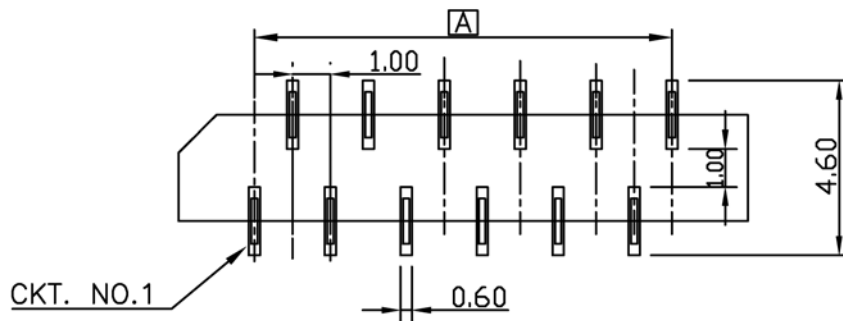

PC BOARD LAYOUT
TOP VIEW
PCB T=1.6mm

UNIT	mm	Projection	Se	Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x. = ±	.xxx = ±			NON ZIF FPC 1.0mm SMT Vertical Type			
x.x = ±0.2							
x.xx = ±0.12							
x.xxx = ±0.05							
DRAWN	Kevin	DATE	April-19-2005	PART NO.	FPCx-xxxSx-x-x		
SCALE	1:3	SIZE	A4	SHEET	1/1	REV	A0