

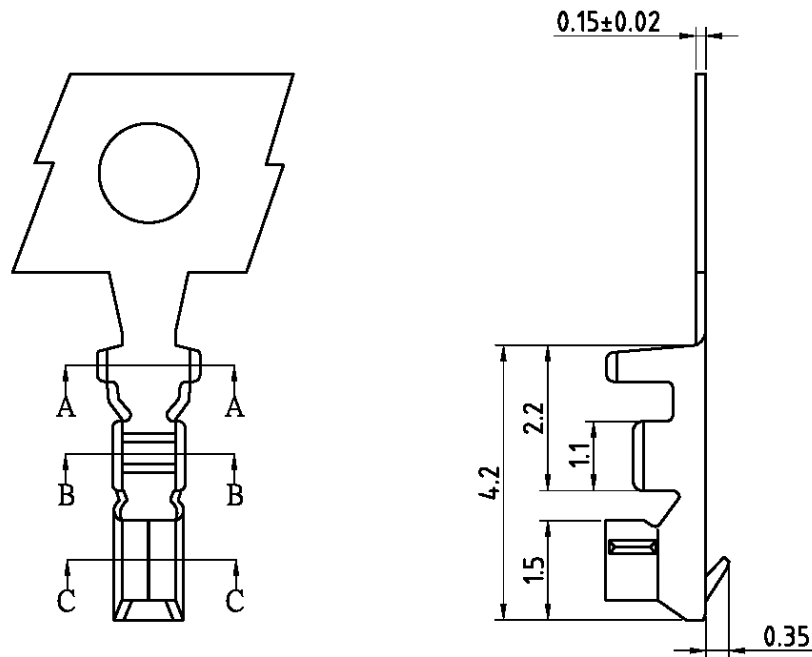


SEC:A-A



SEC:B-B



SEC:C-C

Specification

Current Rating: 1A AC/DC
 Voltage Rating : 50V AC/DC
 Contact Resistance : 20mΩ MAX.
 Withstand Voltage : 500V AC/Minute
 Insulation Resistance : 500MΩ MIN.
 Temperature Range : -25° C To +85° C
 Applicable Wire : AWG #28 To #32
 Accepts : TU1501 Series Housing

Contact Information

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
TU1501TPO-x	AWG #28-#32	0.9mm MAX.	Phosphor bronze	See note	10,000 pcs

Note:

- A: Tin-plated
- AE:Pressing before Tin-plated
- GO: Gold-flash

Seconn International Enterprise Co., Ltd.

UNIT: mm

GENERAL TOLERANCE

ANGLE

±5°

DIM:

X.X ±0.25
 X.XX ±0.15
 X.XXX ±0.08

SCALE: 1 : 1

SHEET: 1 OF 1

DRAWN: Hu2in

CHECKED: Wayne

REV	REVISION RECORD	DATE
B/0	更換版本	2007-11-29

SIZE	DESCRIPTION: 1.50mm WRIE TO BOARD CRIMP TERMINAL
A4	PART NO: TU1501T