


**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2012/07/12	

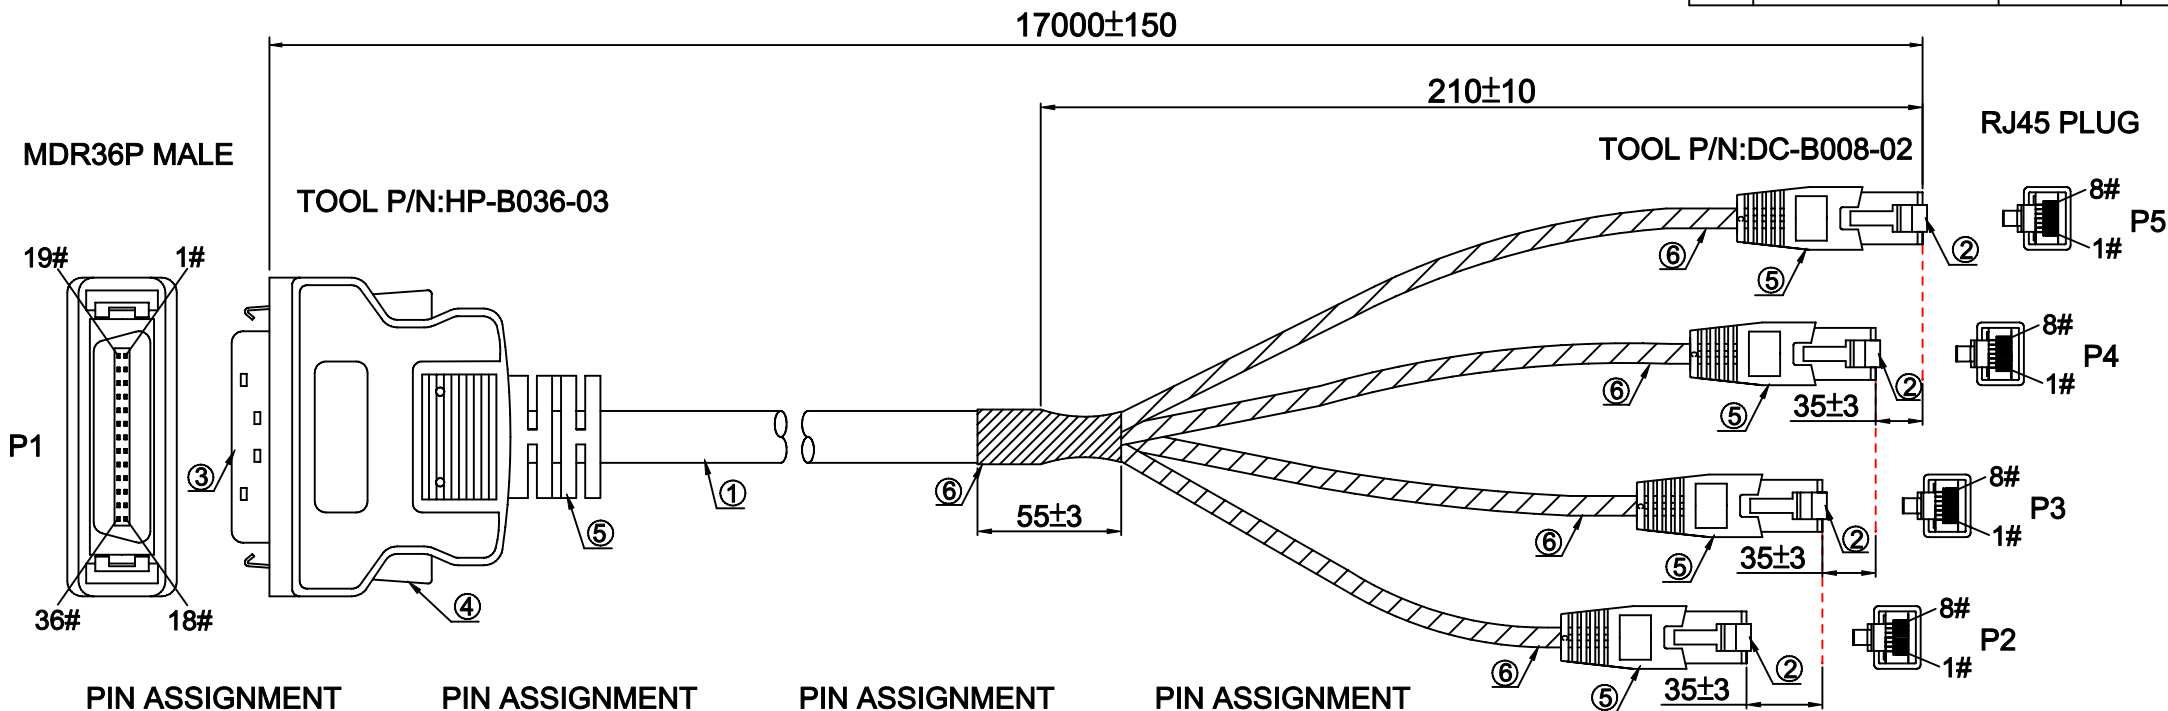

**PIN ASSIGNMENT**

P1		P2
1	WHITE	1
2	WHITE/BLACK	2
3	RED	3
6	RED/BLACK	6
4	YELLOW	4
5	YELLOW/BLACK	5
7	GREEN	7
8	GREEN/BLACK	8

**PIN ASSIGNMENT**

P1		P3
11	BLUE	1
12	BLUE/WHITE	2
13	BROWN	3
16	BROWN/WHITE	6
14	ORANGE	4
15	ORANGE/BLACK	5
17	GRAY	7
18	GRAY/BLACK	8

**PIN ASSIGNMENT**

P1		P4
19	VIOLET	1
20	VIOLET/WHITE	2
21	PINK	3
24	PINK/BLACK	6
22	LIGHT BLUE	4
23	LIGHT BLUE/BLACK	5
25	LIGHT GREEN	7
26	LIGHT GREEN/BLACK	8

**PIN ASSIGNMENT**

P1		P5
29	WHITE/RED	1
30	WHITE/BLUE	2
31	RED/WHITE	3
34	RED/BLUE	6
32	YELLOW/RED	4
33	YELLOW/BLUE	5
35	GREEN/WHITE	7
36	LIGHT GREEN/BLUE	8

**NOTES:**

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
  - 100% OPEN, SHORT & MISWIRE TEST,
  - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.15sec.
  - CONTACT RESISTANCE: 5 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
6	5		BLACK HEAT SHRINK TUBE.
5		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
4	2	C0113	BLACK CLAW BAR.
3	1	A0111	HPCN36P MALE, I.D.C TYPE, BLACK INSULATOR.
2	4	A0650	RJ45 8P8C PLUG, WITH SHELL, CAT6.
1	1	H7866	28AWG*16Pair+F+NWF+AB, OD:8.8MM, BLACK PVC JACKET, UL20276.

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
DRAWN	Yi jiah	SCALE	FREE	TITLE			
CHECK, BY	Caojiawei	REV	A	MDR36P M/4*RJ45 M-17M			
APP, BY	Mr. Huang	DATE	2012/07/12	TOLERANCES			
DWG NO.	SE-S-0045			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	TSR432 110/17M			SHEET	1/1	SIZE	A4