


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2013/02/27	

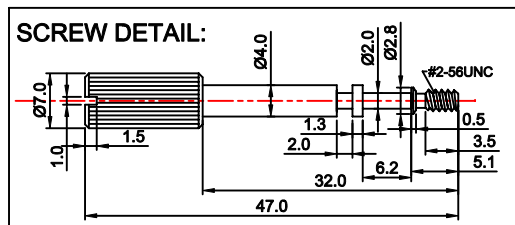

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE: 3 ohm MAX.

UNIT	mm	Projection		 Seconn International Enterprise Co., Ltd.
DRAWN	<i>Yi jialu</i>	SCALE	FREE	TITLE
CHECK,BY	<i>Bao jiawei</i>	REV	A	HPDB50P M/2*HPCN50P M-2M
APP,BY	<i>Mr. Huang</i>	DATE	2013/02/27	TOLERANCES
DWG NO.	SE-S-0070			X.= ± .X= ± .XX= ± .XXX= ±
PART NO.				SHEET 1/2 SIZE A4