



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2019/08/14	
B	CHANGE PIN OUT	2019/08/15	
C	CHANGE DRAWING	2019/10/07	

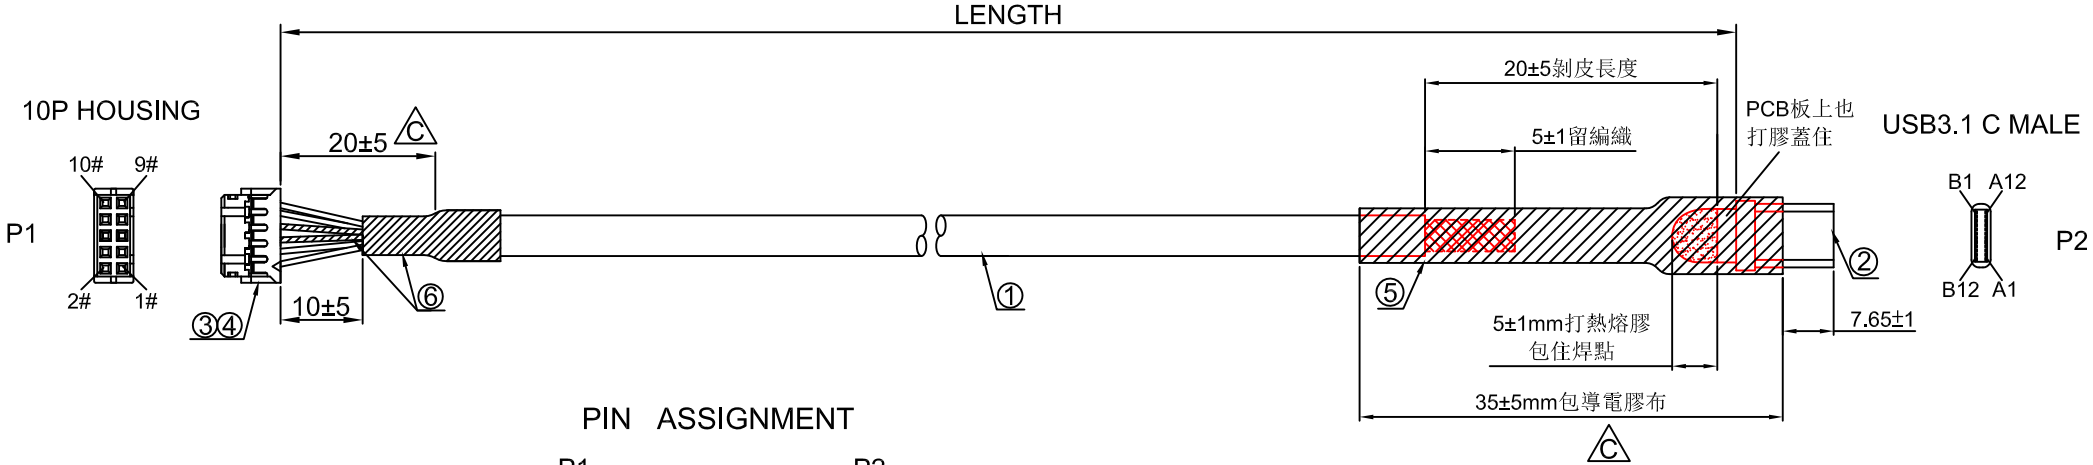

PIN ASSIGNMENT

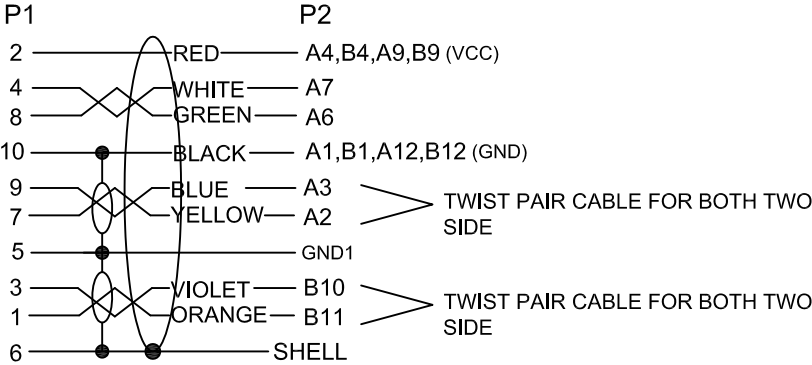

PART NO.	LENGTH
SE-S-0394-0.2M	200±20
SE-S-0394-0.25M	250±20

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3 ohm MAX.

6	3		BLACK HEAT SHRINK TUBE.
5	1	F0213	導電膠布.
4	10	B0024	TERMINAL: PITCH 2.0MM TIN PLATED.
3	1	B0059	HOUSING: 10P PITCH 2.0MM WHITE.
2	1	A0881	USB3.1 C TYPE (3.1C-G2) MALE BLACK INSULATOR SOLDER TYPE.
1	1	E0894	(27AWG*1P+EAM)*2PCS+(27AWG*1P+A)+26AWG*2C+AB OD: 5.8MM, BLACK PVC JACKET, UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Secon International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE
CHECK, BY	Caojiawei	REV	C	10P HOUSING/USB3.1 C M
APP, BY	Mr. Huang	DATE	2019/08/14	TOLERANCES
DWG NO.	SE-S-0394			X.= ± .X= ± .XX= ± .XXX= ±
PART NO.	SE-S-0394-*M			SHEET 1/1 SIZE A4