



RoHS COMPLIANT	
-----------------------	--

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2019/10/14	
B	CHANGE PIN OUT	2019/10/16	
C	CHANGE PIN OUT	2019/11/08	

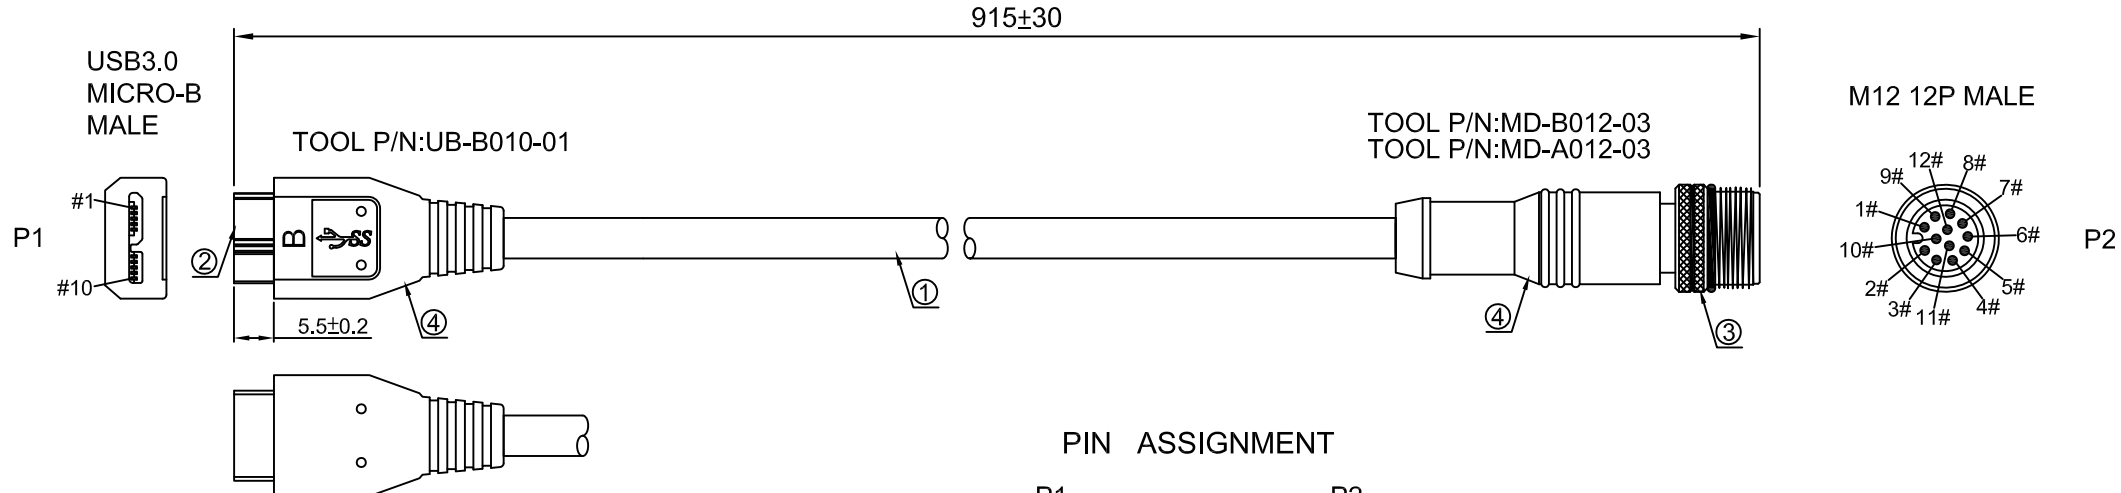

PIN ASSIGNMENT

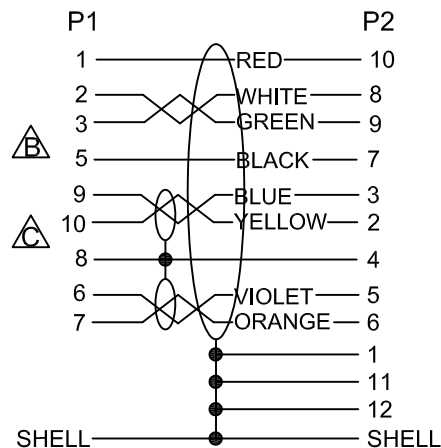

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE:3 ohm MAX.

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE:3 ohm MAX.

4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0584	M12 12P MALE BLACK INSULATOR SOLDER TYPE.
2	1	A0674-1	USB3.0 MICRO-B,MALE,BLUE INSULATOR, SOLDER TYPE.
1	1	E0894	(27AWG*1P+EAM)*2PCS+(27AWG*1P+A)+26AWG*2C +AB OD:5.8MM,BLACK PVC JACKET,UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		 Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Deng zhifei</i>	SCALE	FREE	TITLE			
CHECK,BY	<i>Caojiawei</i>	REV	C	USB3.0 MICRO-B M/M12 12P M			
APP,BY	<i>Mr.Huang</i>	DATE	2019/10/14	TOLERANCES			
DWG NO.	SE-S-0400			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SIL4-USB3m-M12-12			SHEET	1/1	SIZE	A4