





RoHS COMPLIANT

DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2019/10/21	

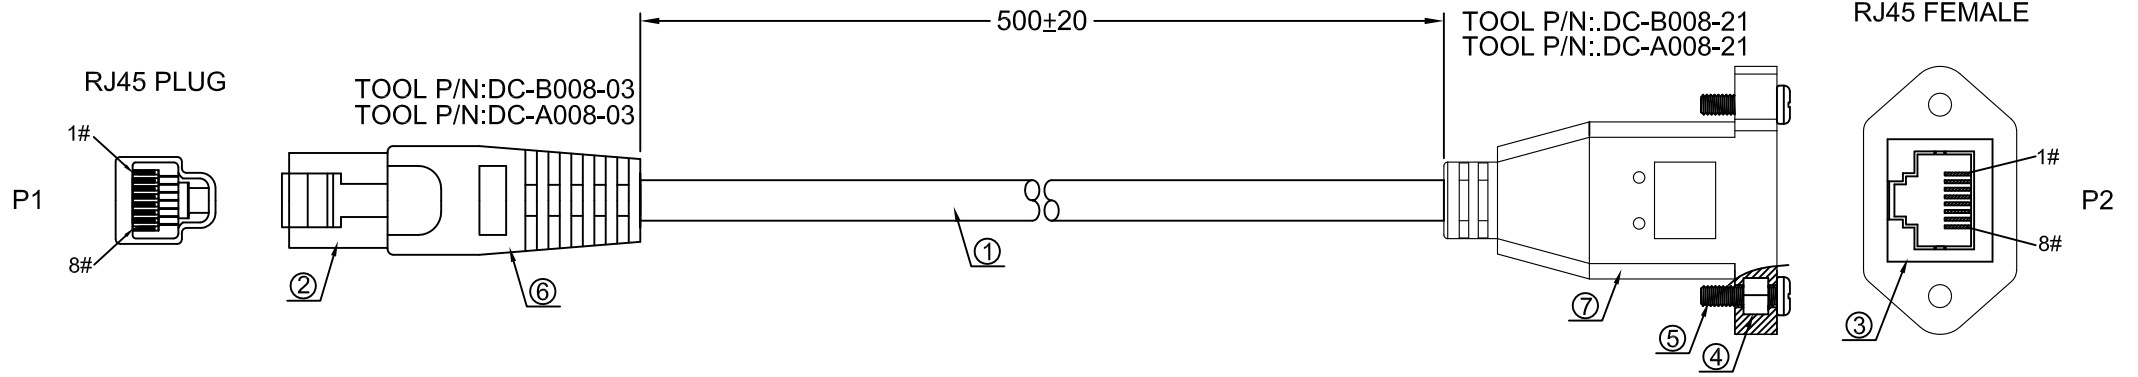

PIN ASSIGNMENT

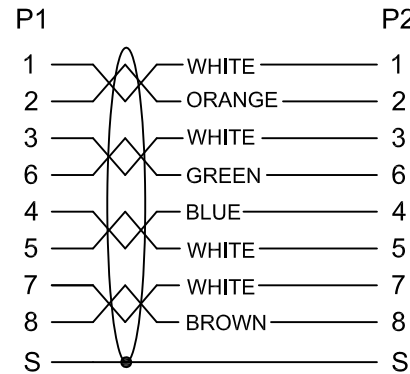

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE:3ohm MAX.

7		G0001	RJ45 FEMALE OVERMOLD BLACK PVC 50P.
6		G0031	RJ45 PLUG OVERMOLD BLACK PVC 80P.
5	2	C0455	SCREW:#4-40UNC 5.0*10MM NICKEL PLATED.
4	2	C0096	NUT:#4-40UNC 4.75*3.25MM NICKEL PLATED.
3	1	A0145	RJ45 8P8C FEMALE.
2	1	A0154	RJ45 8P8C PLUG.
1	1	E0762	SSTP CAT. 6 (26AWG*1PAIR+AM)*4PCS+BRAID OD:6.2MM BLACK PVC JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.		
DRAWN	<i>Deng zhifei</i>	SCALE	FREE	TITLE			
CHECK, BY	<i>Bao jiawei</i>	REV	A	RJ45 M/RJ45 F			
APP, BY	<i>Mr. Huang</i>	DATE	2019/10/21	TOLERANCES			
DWG NO.	SE-S-0403			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0403			SHEET	1/1	SIZE	A4