



DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2019/10/18	

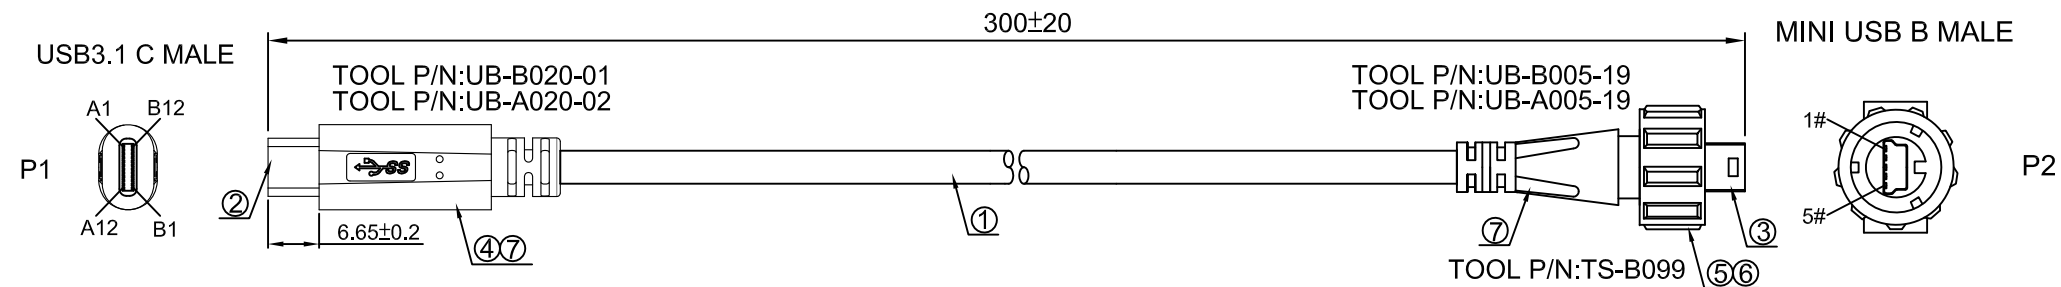

PIN ASSIGNMENT

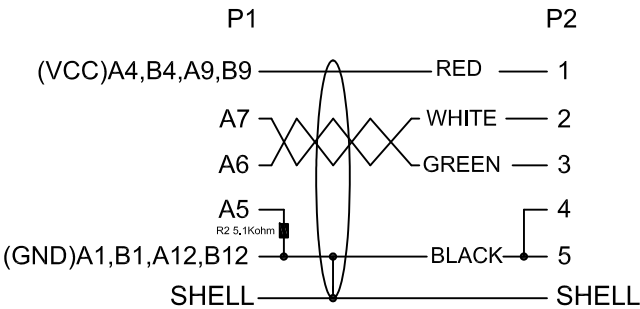

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE:3ohm MAX.

7		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
6		G0116	BLACK PC.
5	1	N0355	WATERPROOF RUBBER RING ID7*OD10.0*H1.5MM.
4	1	D0088	USB3.1 C TYPE MALE METAL CAN.
3	1	A0764-1	MINI USB B 5P MALE GOLD PLATED 30U" BLACK INSULATOR SOLDER TYPE.
2	1		USB3.1 C TYPE MALE SOLDER TYPE.(2.0C-1038-R2)
1	1	E0843	28AWG*1P+24AWG*2C+ADB OD:4.5MM BLACK PVC JACKET UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE		TITLE			
CHECK,BY	Cao jiawei	REV	A		USB3.1 C M/MINIUSB B M			
APP,BY	Mr.Huang	DATE	2019/10/18		TOLERANCES			
DWG NO.	SE-S-0402				X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0402				SHEET	1/1	SIZE	A4