



RoHS COMPLIANT

DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2020/02/26	

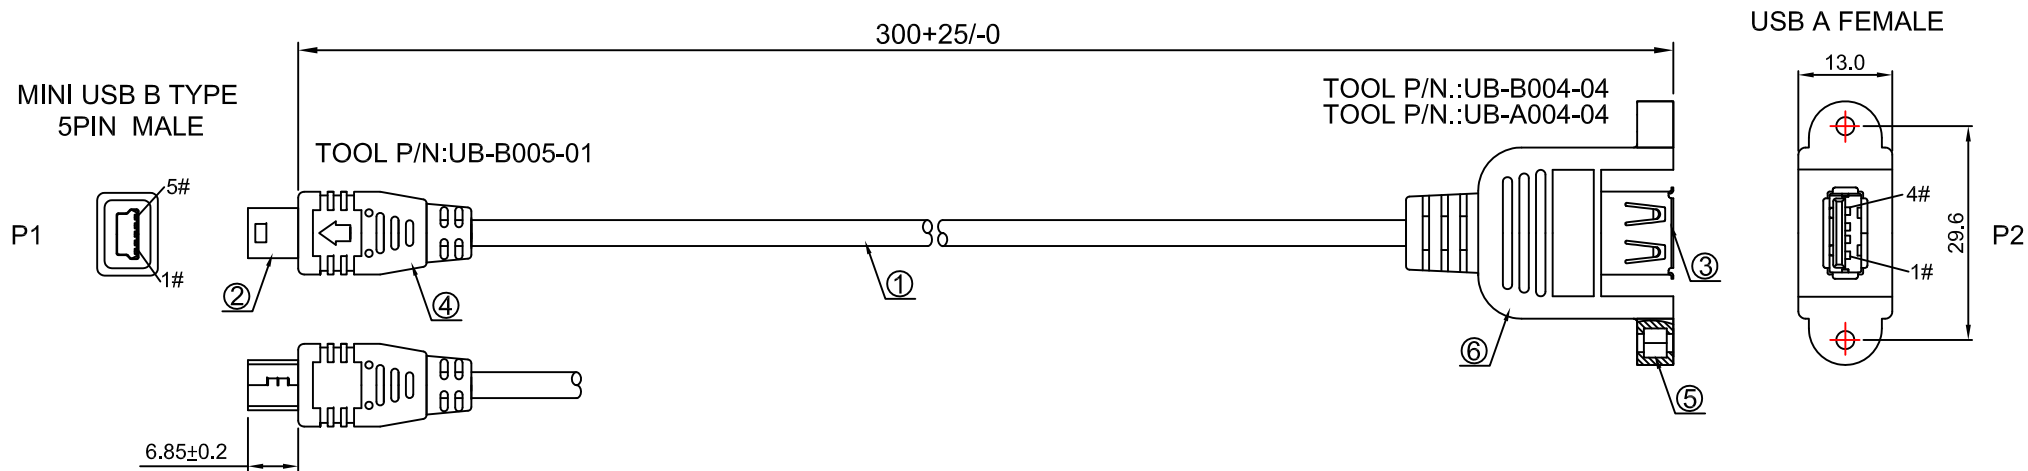

PIN ASSIGNMENT

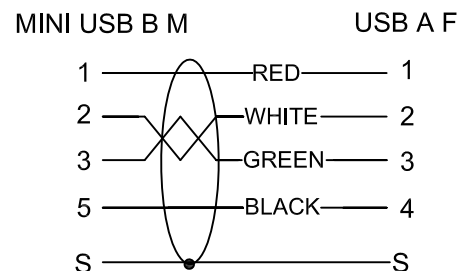

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3ohm MAX.

6		G0124	USB A F OVERMOLD BLACK PVC 40P.
5	2	C0399	HEX NUT:M3 4.75*3.25MM, NICKEL PLATED.
4		G0001	MINI USB B M OVERMOLD BLACK PVC 50P.
3	1	A0603	USB A TYPE FEMALE, SOLDER TYPE, WHITE INSULATOR, CONTACT GOLD FLASH.
2	1	A0824	MINI USB B TYPE MALE, SOLDER TYPE, BLACK INSULATOR, CONTACT GOLD FLASH.
1	1	E0329	28AWG*1PAIR+28AWG*2C+ADB, OD:3.5mm BLACK PVC JACKET UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE	
CHECK, BY	Cao jiawei	REV	A	MINI USB B M/USB A F	
APP, BY	Mr. Huang	DATE	2020/02/26	TOLERANCES	
DWG NO.	SE-S-0413			X.= ±	.X= ± .XX= ± .XXX= ±
PART NO.	200219-A			SHEET	1/1 SIZE A4