



型号	模号
USB AM	K194
AF带耳	K159


變更内容	變更日期	版本

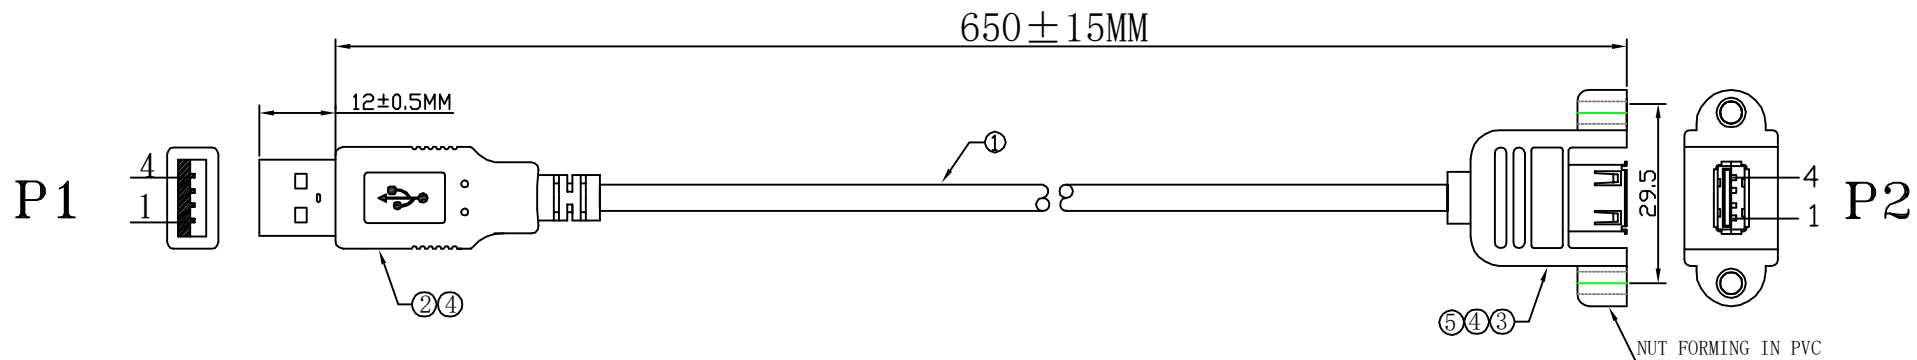

PACKING: 10 PCS / Bundle

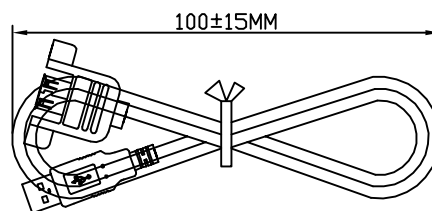

PIN OUT

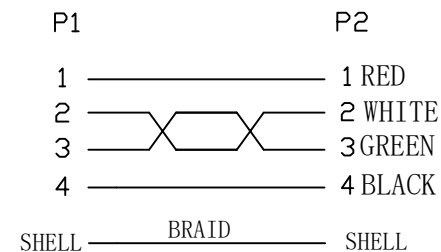

ELECTRONIC TEST CONDITION:
 100% OPEN SHORT & MISWIRE TEST.
 CONDUCTIVE RESISTANCE: 5Ω/MAX
 INSULATION RESISTANCE: 20MΩ/MIN. AT DC 300V

PART LIST: ALL "ROHS" COMPLIANT, ALL MATERIALS ARE EQUIVALENT.

5	NUT:M3 Phillips Screw Hex nut		
4	PVC:45P BLACK	1	SET
3	USB A/F CONTACT G/F HOUSING WHITE SHELL Ni PLATED		Kg/1K
2	USB A/M CONTACT G/F HOUSING WHITE SHELL Ni PLATED	1	SET
1	CABLE UL2725 28AWG*1P+24AWG*2C+ABE CABLE BLACK OD:4.5MM. L= 650MM	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

Seconn International Enterprise Co., Ltd.									
TOLERANCES			PROJECTION		TITLE				
AS DRAWING			 UNIT mm		USB A Male to A Female Panel Mount Cable 650mm Length				
SCALE	NONE	SIZE	A4	SHEET	1/1	REV	A		