

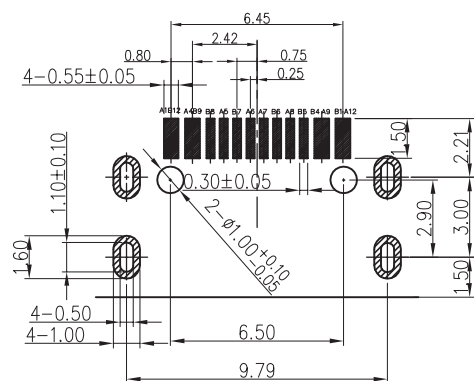
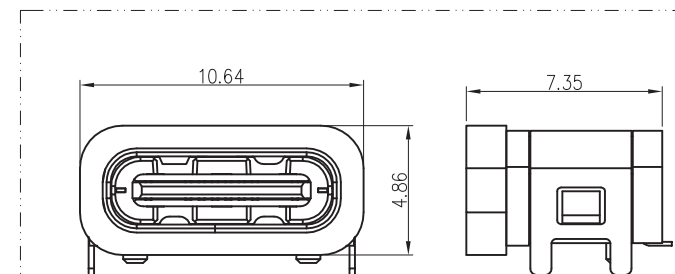



RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	08/12'19	FY	/	MOON

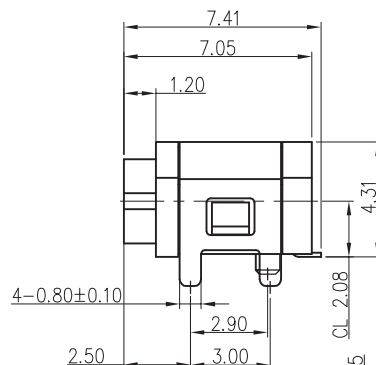


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

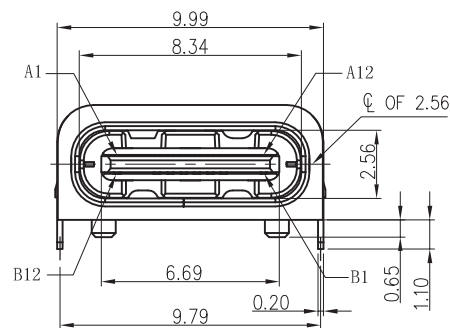

带防水圈示意图

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

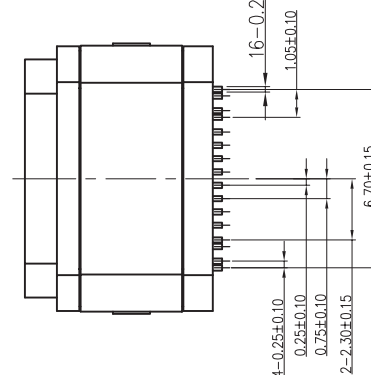

NOTES:

SPECIFICATION:


1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IP54.

6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.x = ± 0.30 x.xx = ± 0.20 Angles ± 2° x.xxx = ± 0.10				Type C USB 16 Pin Female Connector Waterproof Type			
			UNIT				
			mm				
DRAWN	FY	DATE	2019/08/12	PART NO.	USB-SC104313332		
SCALE	1:1	SIZE	A4	SHEET	1/2	REV	A0

RoHS

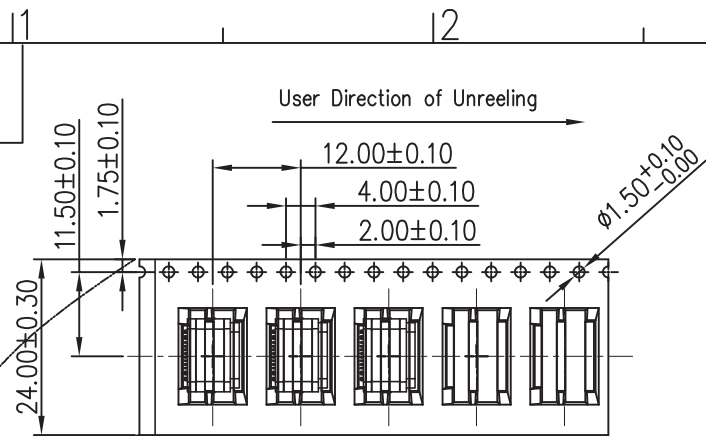


COVER TAPE PEELING ANGLE: $165^{\circ} \sim 180^{\circ}$
PEELING FORCE: 20~130g

CARRIER TAPE

User Direction of Unreeling


DETAIL B

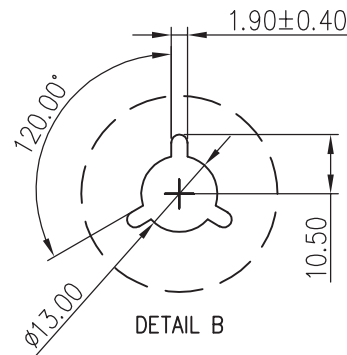


NOTES

1. NUMBER OF CONNECTORS: 700PCS/REEL

2. LEAD TAPE LENGTH

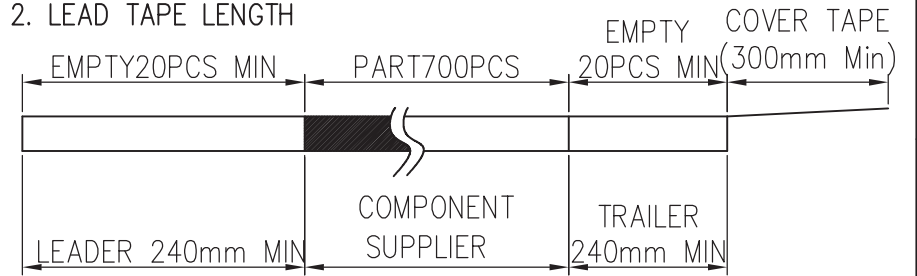

3. QUANTITY: 7000PCS/CARTON

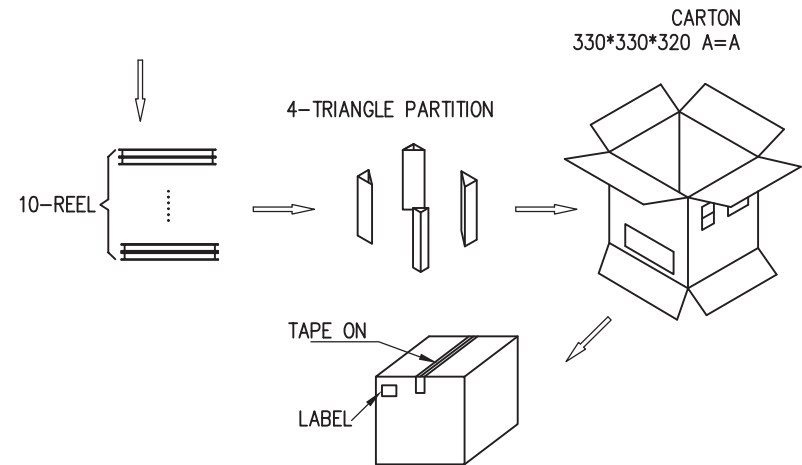

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.x = ± 0.30 x.xx = ± 0.20 x.xxx = ± 0.10 Angles ± 2°				Type C USB 16 Pin Female Connector Waterproof Type			
			UNIT				
			mm				
DRAWN	FY	DATE	2019/08/12	PART NO.	USB-SC104313332		
SCALE	1:1	SIZE	A4	SHEET	2/2	REV	A0