



VGA		Change content	Date of change	Version

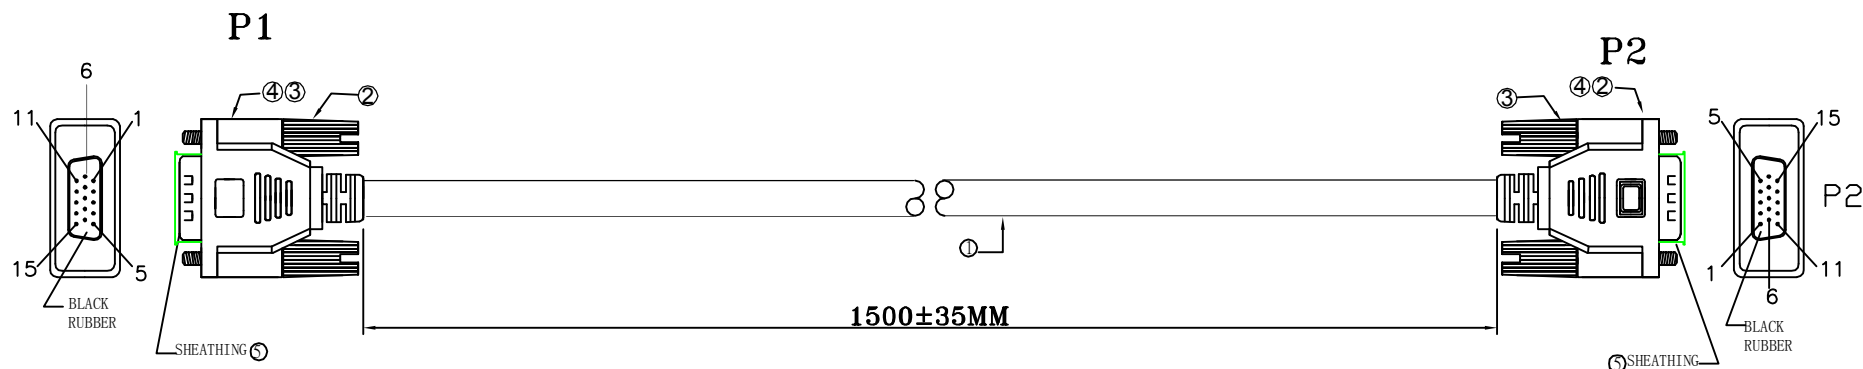

PACKING: 1 PCS/BAG

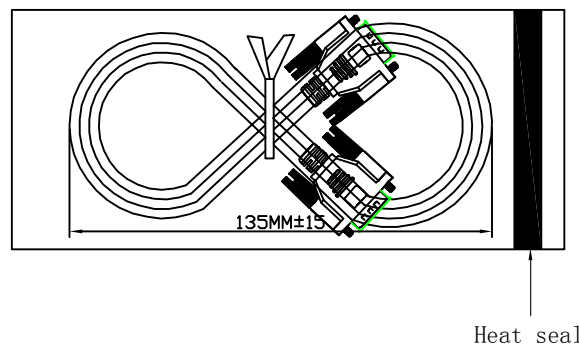

P1 (HDB15P/M)	Color	P2 (HDB15P/M)
1	RED	1
2	GREEN	2
3	BLACK	3
6,7,8	Ground	6,7,8
5	BLACK	5
9	Brown	9
12	RED	12
13	GREEN	13
14	Yellow	14
15	Orange	15
SHELL	Ground	SHELL
4		4
10		10
11		11

1. 100% Test (Open, Short, Miss Wire)
2. Contact Resistance : 10 ohm max
3. Insulation Resistance : 10M ohm min
4. Hi-Pot : 300V DC/10ms

PART LIST: ALL "ROHS", "REACH" COMPLIANT, ALL MATERIALS ARE EQUIVALENT.

5	TRANSPARENT DUST JACKET.	2	PCS
4	ABS ASSEMBLED SHELL BLUE.		K/KG
3	THUMB SCREW: #4-40unc 7.8*40mm MOLDED BLACK.	4	PCS
2	CONN.: HDB 15P GOLD MALE SOLDER TYPE NICKEL SHELL BLACK RUBBER CORE.	2	PCS
1	UL20276 30AWG*3C+#30*6C+AE OD5.5MM±0.15MM JACKET PVC BLACK	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

TOLERANCES				PROJECTION	TITLE		
AS DRAWING					D-SUB 15 Pin Male to Male Cable L: 1500mm		
				UNIT			
				mm			
DRAWN	Tan	DATE	2020/12/16	PART NO.	SC-S-2011-2010		
SCALE	X:1	SIZE	A4	SHEET	1/1	REV	A1