





型 号	模 号
AM外模:	
AF外模:	

版本 REV.	變更內容 DESCRIPTION	日期 DATE	制圖 DR.	審核 APPD
A1	Modify 3.3 MM screw holes and metal leakage according to customer specified 8.5 mm design 8.6mm.	20201029	tan	Diana
A2	Modify length from 1.7 M to 2.0 M according to customer requirements	20201105	tan	Diana
A3	Modify USB 3.0 A Female Panel Mount According Customer Request	20201209	tan	Diana

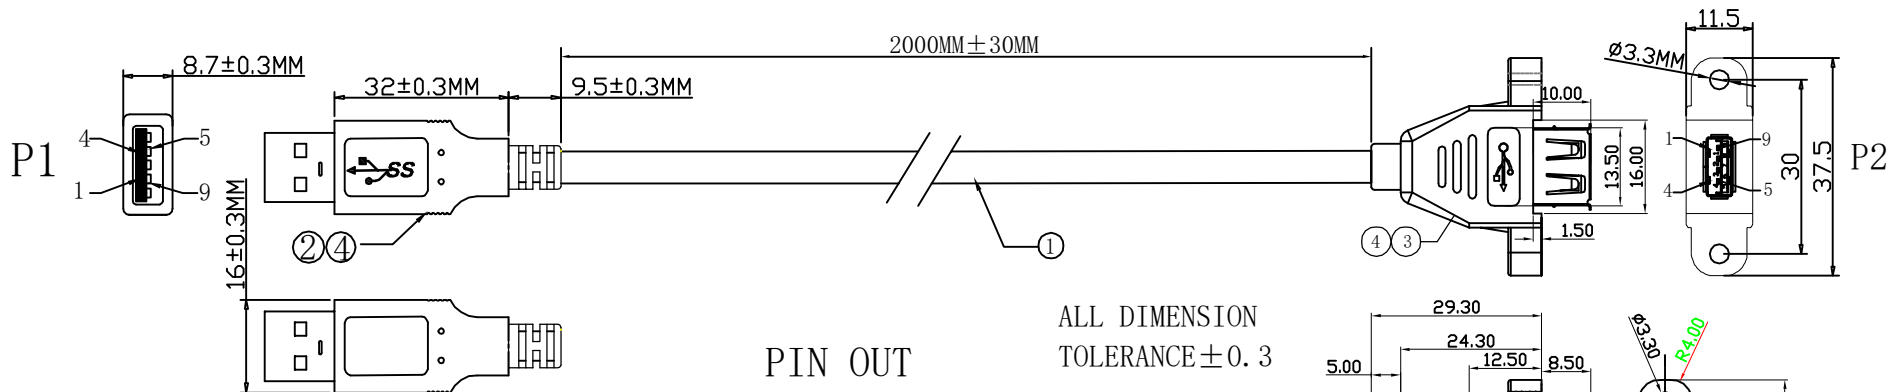

PACKING: Single PCS Packing.

Heat seal
mouth

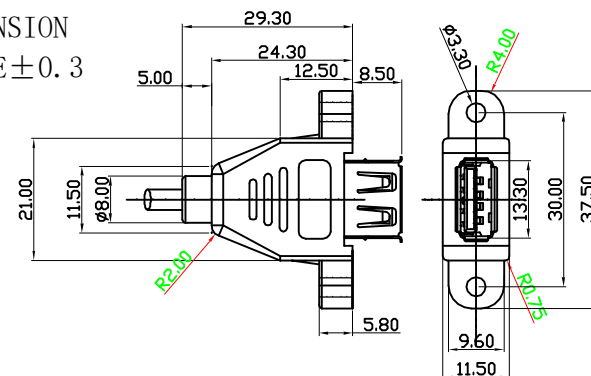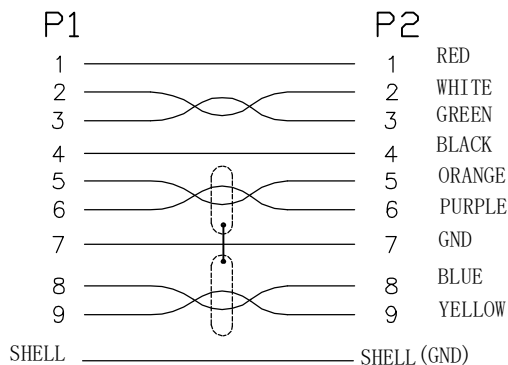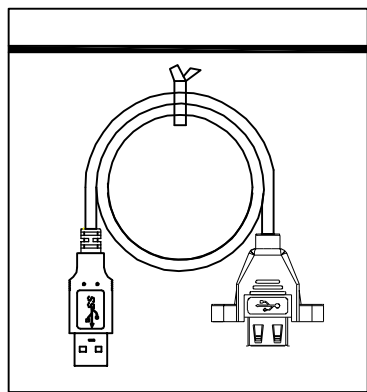

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TESTING
2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec
3. INSULATION RESISTANCE: 5M Ohms(Min)
4. CONDUCTIVE RESISTANCE:10 Ohms(Max)
5. Transmission speed :5Gbps.

PART LIST: ALL "ROHS" COMPLIANT, ALL MATERIALS ARE EQUIVALENT.

4	PVC:45P BLACK.		Kg/1K
3	USB 3.0 AF TYPE GOLD CONNECTOR,NICKEL PLATED SHELL,PLASTIC:BLUE.	1	SET
2	USB 3.0 AM TYPE GOLD CONNECTOR,NICKEL PLATED SHELL,PLASTIC:BLUE.	1	SET
1	UL2725 (28#*1P+DAM)*2+28#*1P+24#*2C+AEB OD:5.8 BLACK	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

 Seconn International Enterprise Co., Ltd.							
TOLERANCES			PROJECTION	TITLE			
AS DRAWING				USB 3.0 A Male to USB 3.0 A Female Panel Mount Cable L: 2000mm			
			UNIT				
			mm				
DRAWN	Tan	DATE	2020/12/09	PART NO.	SC-S-2010-2808		
SCALE	X:1	SIZE	A4	SHEET	1/1	REV	A3