


ROHS COMPLIANT

REV.	DESCRIPTION	DATE	ECN NO.
01	NEW DESIGN	2018/11/08	-

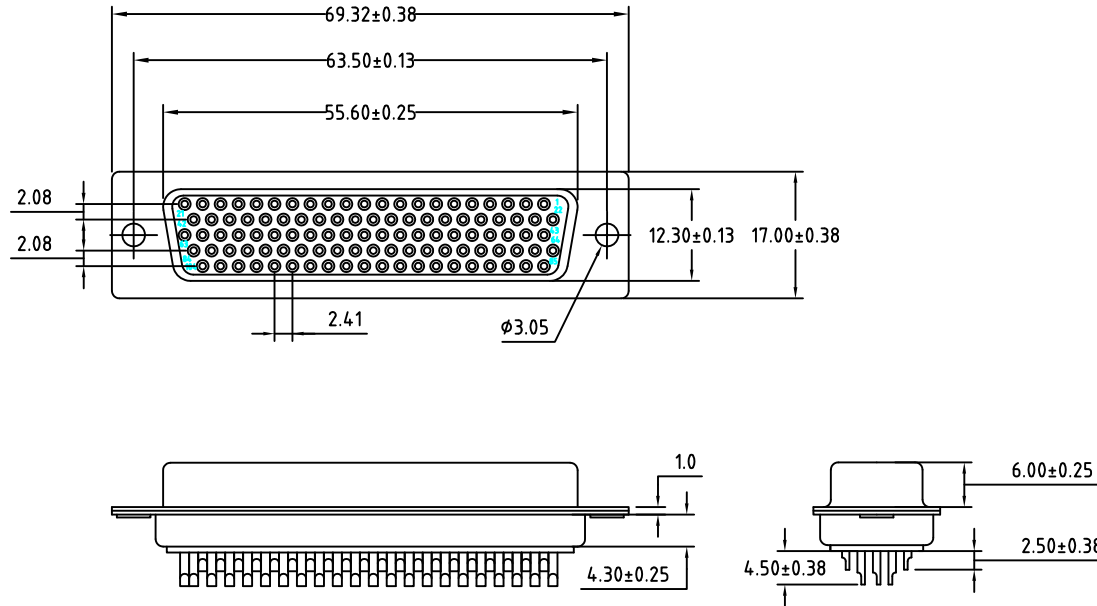

ORDERING INFORMATION:

DSUB 2 F 14 1 1 1 1 P G X 1 A 0 0 0
(1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14) (15) (16)

- SERIES NO.
DSUB: D-SUB SOLDER TYPE
- CONTACT TYPE.
2:PUNCH PIN
- CONNECTOR TYPE.
F:FEMALE
- NUMBER OF POSITIONS.
14:104PIN
- CONNECTOR CONSTRUCTION.
1:GENERAL TYPE
- SUFFIX NO.
1:GENERAL TYPE
- BOTTOM SIDE.
1:GENERAL TYPE
- HOUSING COLOR.
1:BLACK(OPTIONAL)

- HOUSING MATERIAL.
P:PBT+30% GLASS FILLED
- TERMINAL PLATING.
G:FULL GOLD
- THICKNESS OF TERMINAL PLATING.
X:1U~30U(OPTIONAL)
- SHELL PLATING.
1:FRONT-NICKEL PLATING;BACK-TIN
PLATING,SALT-FOG:24H(OPTIONAL)
- LOCKING.
A:NONE
- SCREW.
0:NONE
- CRIMP STYLE FOR ACCESSORIES
0:THROUGH-HOLE
- OTHER.
0:NONE

REMARKS:

1. MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL TIN FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED
CONTACT MATERIAL : BRASS
CONTACT FINISH : FULL GOLD FLASH

2. ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +105°C

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.	= ± ---	Angle ± 2.0°		D-SUB Connector 104 Pin Female Solder Type			
x.x	= ± ----		UNIT				
x.xx	= ± 0.		mm				
x.xxx	= ± ----						
DRAWN	ZHOU	DATE	2018/11/08	PART NO.	DSUB2F141111PGX1A000		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A