
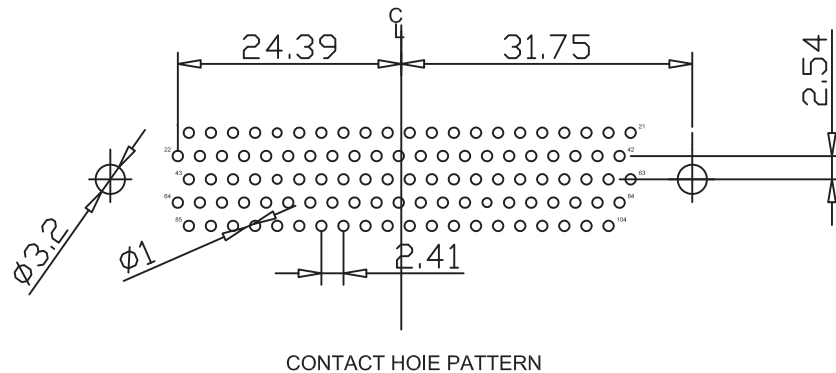

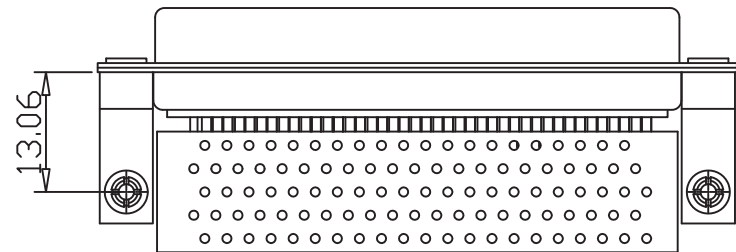


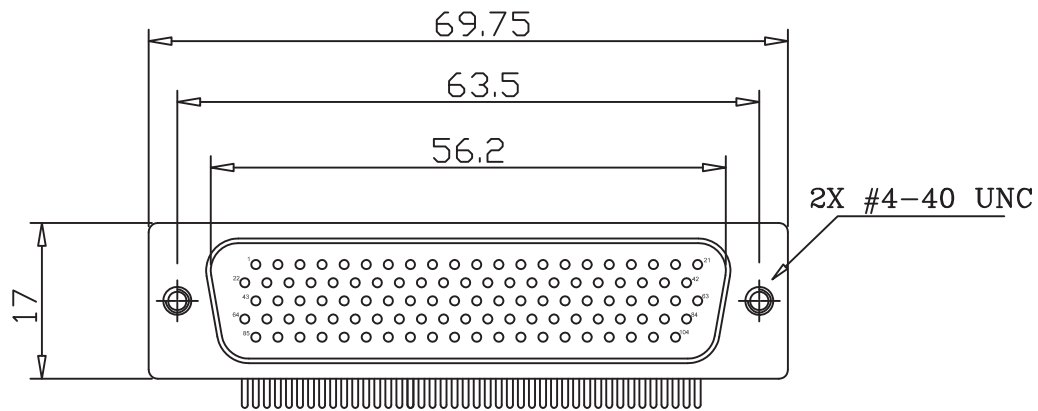

CONTACT HOLE PATTERN

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHEET NICKEL FINISHED
NICKEL FINISHED, BACK SHEET TIN FINISHED
INSULATOR : PBT THERMOPLASTIC 30% GLASS FILLED,
UL 94V-0 RATED , PC99 COLOR
CONTACT MATERIAL : BRASS
CONTACT FINISH : SELECTIVE GOLD FLASH
RIVETED INSERT : BRASS MATERIAL, NICKEL FINISHED
JACK SCREWS : BRASS MATERIAL , NICKEL FINISHED
WITH #4-40 THREADED RIVETED CLINCH
NUTS ON BACK SHELL

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC MIN.
INSULATION RESISTANCE : 1000MEGOHMS MIN.
TEMPERATURE RATING : -55°C ~ +105°C



Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.	= ± ---	Angle ± 2.0°		D-SUB Connector 104 Pin Male Right Angle High Density Type			
x.x	= ± 0.13						
x.xx	= ± ---						
x.xxx	= ± ----						
DRAWN	WU	DATE	2010/05/10	PART NO.	DSUB-SR104-100-014		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0