


型号	模 号	變更內容	變更日期	版本

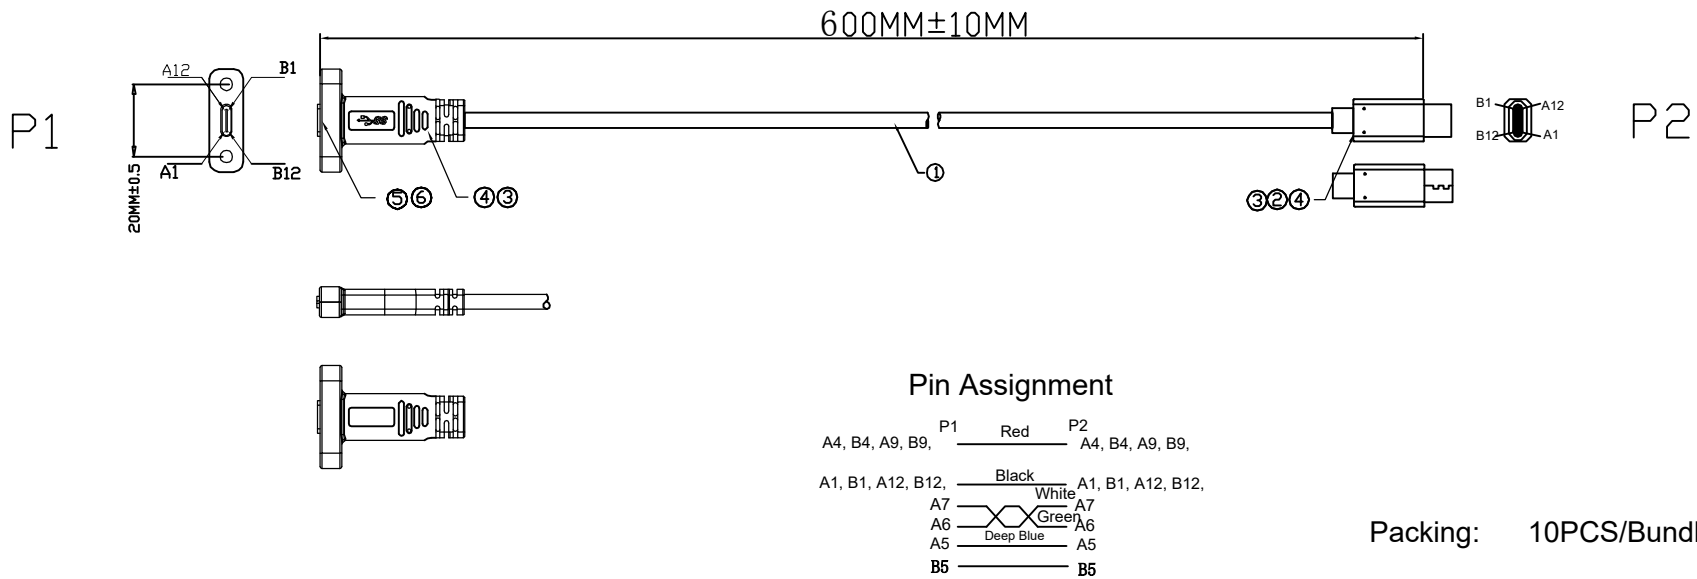

Packing: 10PCS/Bundle

Note:
1.100% OPEN SHORT & MISWIRE TEST.
2.CONDUCTIVE RESISTANCE:2Ω/MAX.
3.INSULATION RESISTANCE:10MΩ/MIN.
4.HI-POT TEST:AT DC 300V.

THIS PRODUCT CONFORMS TO THE ROHS ENVIRONMENTAL PROTECTION STANDARD,

6	USB TYPE C F GOLD CONNECTOR, NICKEL-PLATED SHELL, PLASTIC :BLACK	1	SET
5	NUTS M3		KG/K
4	MOLD: 45P PVC COLOR:BLACK		KG/K
3	MOLD: LOW DENSITY PE.	1	SET
2	USB TYPE C M BLACK PBT WITH NICKLE PLATED SHELL	1	SET
1	UL2725 (30#*1P+DAM)*2+30#*1P+22#*3C+AEB OD: 3.8mm BLACK	1	PCS
ITEM	STANDARD SPECIFICATION	QTY	UNIT

Seconn International Enterprise Co., Ltd.							
TOLERANCES			PROJECTION	TITLE			
AS DRAWING				USB 2.0 Type C Male to Type C Female Panel Mount Type Cable			
			UNIT				
			mm				
DRAWN	Tan	DATE	2025/09/09	PART NO.	SC-S-2509-0904		
SCALE	X:1	SIZE	A4	SHEET	1/1	REV	A