


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2023/11/15	
B	CHANGE LENGTH	2023/11/21	
C	CHANGE LENGTH&CABLE	2023/12/12	

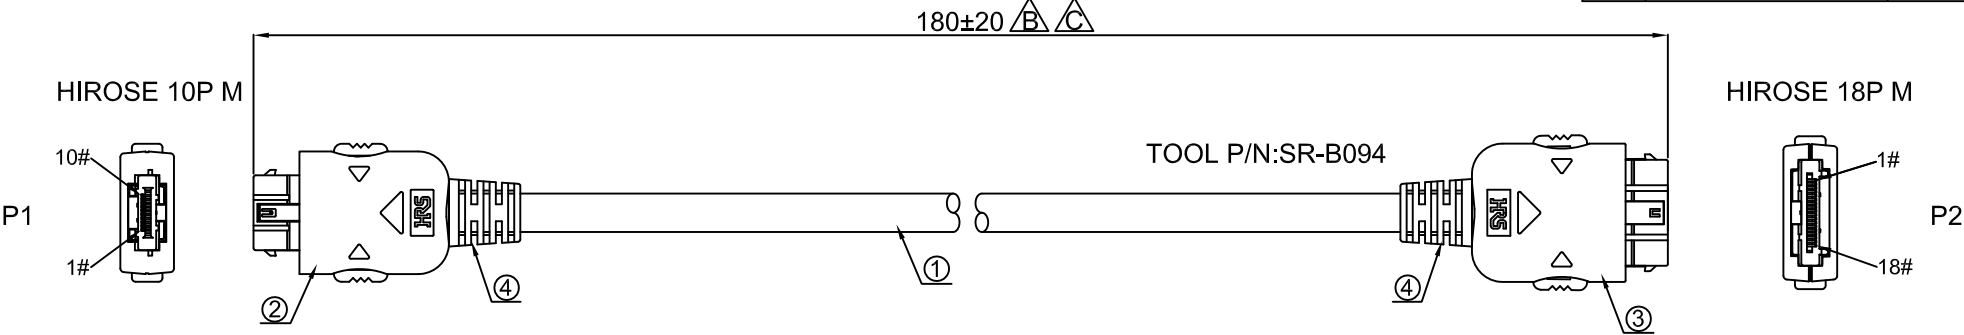

PIN ASSIGNMENT

P1		P2
1	——— BLACK ———	1
2	——— BROWN ———	2
3	——— RED ———	3
4	——— YELLOW ———	4
5	——— GREEN ———	7
7	——— BLUE ———	12
6	——— PURPLE ———	13
8	——— GRAY ———	15
9	——— WHITE ———	16
10	——— PINK ———	18

NOTES:
1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
(a).100%OPEN,SHORT & MISWIRE TEST,
(b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec,
(c). CONTACT RESISTANCE:3 ohm MAX.

4		G0069	ALL CONNECTORS OVERMOLD BLACK PVC 30P.
3	1		18PIN MALE ASSEMBLING TYPE HIROSE:ST40X-18S-CV(30).
2	1		10PIN MALE ASSEMBLING TYPE HIROSE:ST40X-10S-CV(30).
1	1		30AWG*10C+AM+D+BRAIN BLACK PVC JACKET OD:4.0MM UL2835.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Cao jin</i>	SCALE	FREE	TITLE				
CHECK,BY		REV	C	ST40X 10PIN M/18PIN M				
APP,BY		DATE	2023/11/15	TOLERANCES				
DWG NO.	SE-S-0445			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	SE-S-0445-0.18M 			SHEET	1/1	SIZE	A4	