

1 2 3 4 5 6 7 8



RevNo		Date	Signature	Checked

ORDERING CODE


DSUB

X	X	X	X	X	X	X	X	X	X	X
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪




- | | |
|---|---|
| ① SERIES NO.
17W2 | ⑧ CONTACT DIM
1: $\phi 2.50\text{MM}$
2: $\phi 3.60\text{MM}$
3: $\phi 4.40\text{MM}$
4: $\phi 5.50\text{MM}$ |
| ② CONTACT TAIL STYLE
S : SOLDER | ⑨ MOUNTING OPTION
VACANT : NO ATTACHED ACCESSORIES
5 : ATTACH AFTER SCREW
7 : ATTACH BEFORE SCREW |
| ③ TYPE
M : MALE
F : FEMALE | ⑩ OTHER ATTACHED DIM L.
1 : 20
2 : 20.5
3 : 21.8
4 : 22 |
| ④ SHELL PLATING
8 : NICKEL
9 : TIN
11 : GOLD | ⑪ CIRCUMSTANCE
LF : RoHS
HF : NO HALOGEN |
| ⑤ PLASTIC COLOR
1 : WHITE
3 : BLACK
6 : GREEN
9 : BLUE | |
| ⑥ CONTACT AREA PLATING
1 : FULL | |
| ⑦ CONTACT THICKNESS PLATING
VACANT : 1u'
2 : 3u'
5 : 5u'
6 : 10u'
7 : 15u'
8 : 30u' | |

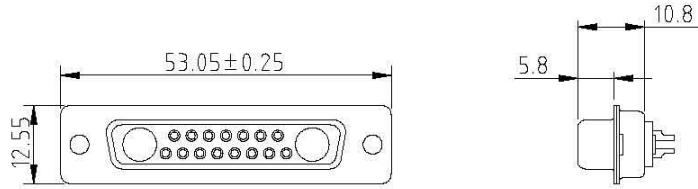

AFTER SCREW



BEFORE SCREW



NOTE

ITEM NO	DIMENSION
	ØB
1	2.50
2	3.60
3	4.40
4	5.50

L	
1	20
2	20.5
3	21.8
4	22

DRAW.BY		DATE	2008-04-17	UNIT	MM	TOLERANCE UNSPECIFIED	.X : ± 0.30 .XX : ± 0.25 .XXX : ± 0.150	Ang. $\pm 2^\circ$	Seconn International Enterprise Co., Ltd.	ITEM	17W2 FEMALE POWER PIN-SOLDER
APPVL.BY		VERSION	A	SCALE		DWG.No.	F:/XX/ / +			PART No.	DSUB17W2S-FXXX-X-X-X-X-X
										CUSTOMER	

1 2 3 4 5 6 7 8