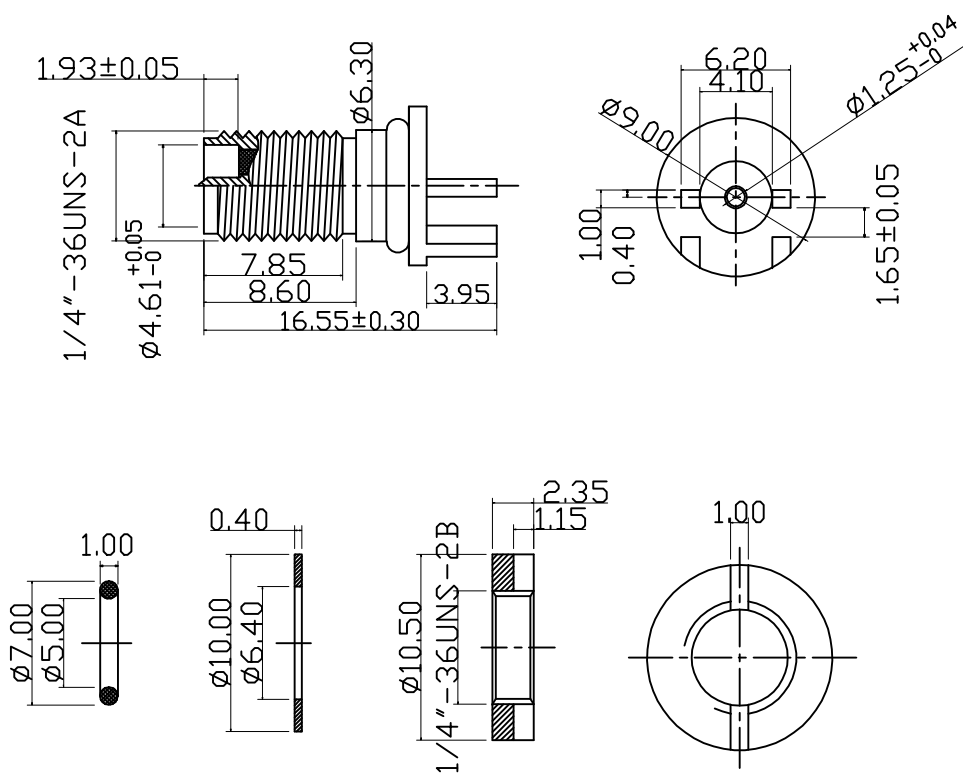


- 1 Electrical Characteristics
 - 2.1 Impedance: 50 Ohm
 - 2.2 Working Frequency: DC – 12.4 GHz
 - 2.3 S.W.R.: ≤ 1.2
 - 2.4 Working Voltage: 335V max
 - 2.5 Insulation Resistance: 5000 MOhm
 - 2.6 Contact Resistance: Center Contact: 3 mOhm
Outer Contact: 2 mOhm
- 2 Environmental
 - 3.1 Working Temperature Range: – 55 °C~ +125°C

NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	UNITS	m/m	DRAWN	File No.
6	O'RING	SILICON	RED			Unless Otherwise Specified			Seconn International Enterprise Co., Ltd.
5	WASHER	BRASS	GOLD			Tolerances		CHECKED	TITLE.
4	NUT	BRASS	GOLD			ANGLES = ±3			
3	INSULATOR	PTFE	GOLD			UP TO 6 = ±0.1			
2	PIN	BRASS	GOLD			6-40 = ±0.2		APPROVED	
1	BODY	BRASS	GOLD			40-120 = ±0.6			
						120-315 = ±1.0			
						ABOVE 315 = ±1.6			
						SCALE	8/1	DATE	PART NO.
						ISSUE	A	96/10/02	SMA Connector Female P.C.B. L: 1.65mm