


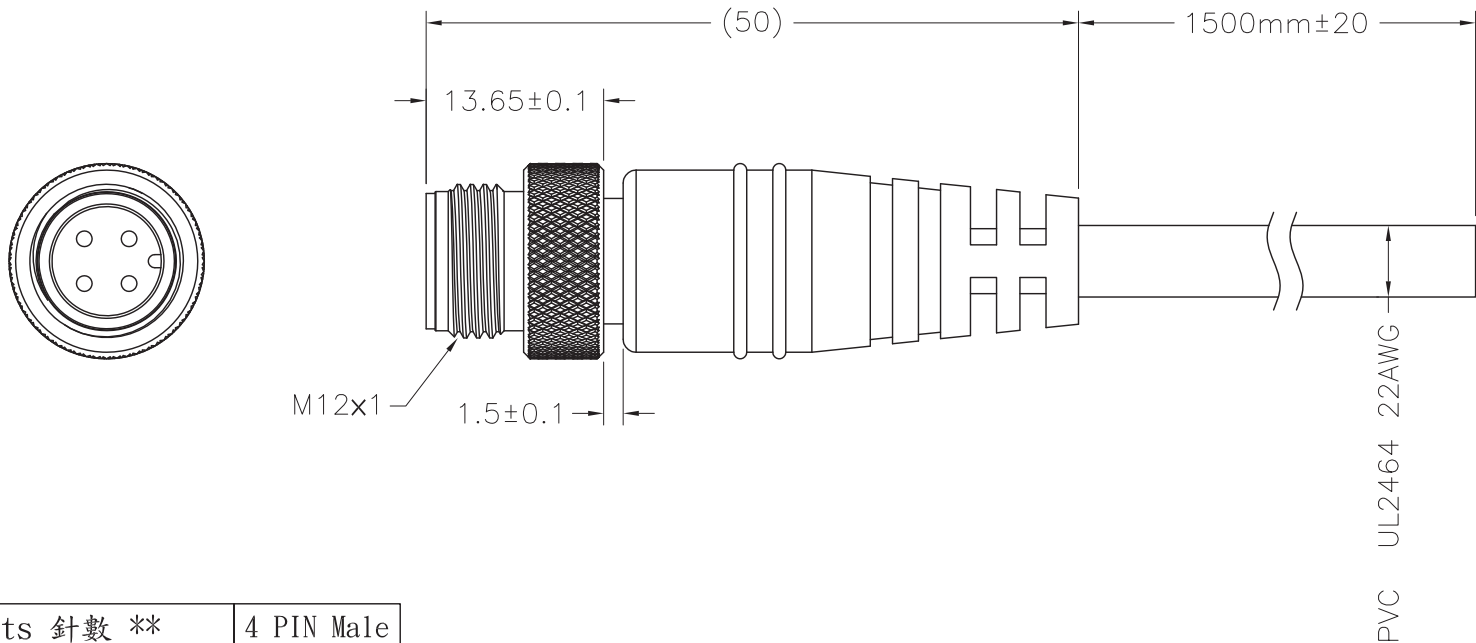

Number of Contacts 針數 **	4 PIN Male
Contacts of Configuration 針位圖	
cross-section AWG 連接截面	22 AWG
Waterproof Rating IP 防水等級	IP 68
Measuring voltage 測量電壓	250V
Impulse voltage 衝擊電壓	2500V
Measuring current 測量電流	4 A
Transition resistance 過渡電阻	≤3 mΩ
Insulation resistance 絕緣電阻	>10 ¹⁰ Ω

接點: Wirecolours:
1=黑 1=black
2=白 2=white
3=紅 3=red
4=綠 4=grev

NAME	SPECICATION
Bady	PVC
M12 Male Nut	Brass,Nickel Plated
Connector	M12 Male, Nylon
Male Pin	Brass, 6u" Gold Plated

		機 種	M12 Connector	單 位	mm	設 計	工程課 1020527 Wang	審 核	工程課 1020527 Jay	核 准	總經理 1020527 Steven
		品 名	M12公頭線端180°	日 期	1020527						
NO.	變更說明	型 號	M12C-S1204-PMA-1.5M	製圖法	Φ ⊕						