


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2013/05/31	

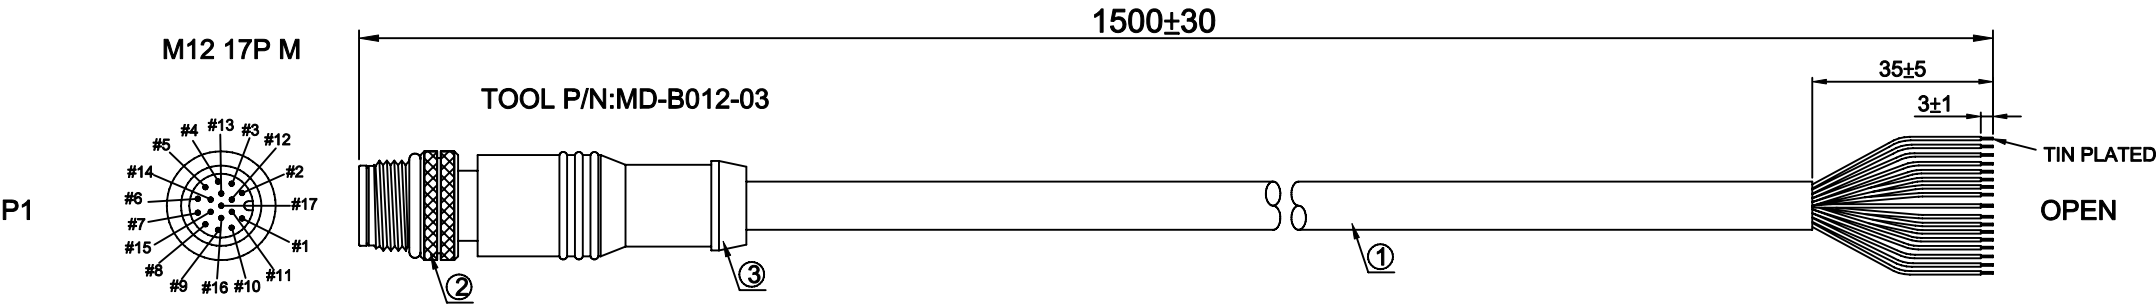

PIN ASSIGNMENT

P1	OPEN
1	BLACK
2	BROWN
3	RED
4	ORANGE
5	YELLOW
6	GREEN
7	BLUE
8	PURPLE
9	GRAY
10	WHITE
11	PINK
12	LIGHT GREEN
13	LIGHT BLUE
14	BLACK/WHITE
15	BROWN/WHITE
16	RED/WHITE
17	ORANGE/WHITE

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.

2. ELECTRICAL TEST CONDITION:

(a).100%OPEN,SHORT & MISWIRE TEST,

(b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.

(c). CONTACT RESISTANCE:3 ohm MAX.

3	1	G0061	ALL CONNECTORS OVERMOLD BLACK PU.
2	1		M12 17PIN MALE, BALCK INSULATOR,SOLDER TYPE WP-17M2-01.
1	1		26AWG*17C+AM, OD:6.2MM, BLACK PVC JACKET, UL20276.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Huang shenggen	SCALE	1:1	TITLE				
CHECK,BY	Caojiawei	REV	A	M12 17P M/OPEN				
APP,BY	Mr.Huang	DATE	2013/05/31	TOLERANCES				
DWG NO.	SE-S-0080			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	M12C-S17PMA-1.5M			SHEET	1/1	SIZE	A4	