


RoHS COMPLIANT

DESCRIPTION CONTROL


REV	DESC	DATE	APP
A	FIRST RELEASE	2013/05/31	

M12 17P F

P1

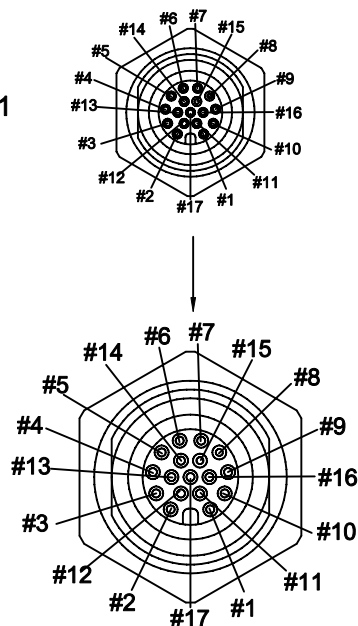

500±20

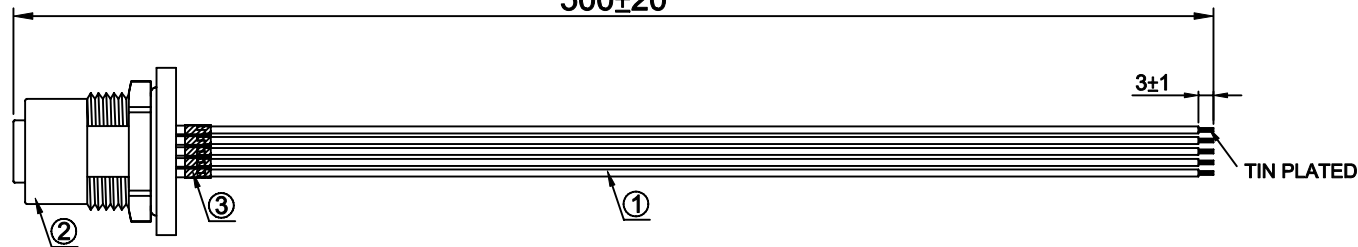

OPEN

PIN ASSIGNMENT

P1	OPEN
1	BLACK
2	BROWN
3	RED
4	ORANGE
5	YELLOW
6	GREEN
7	BLUE
8	PURPLE
9	GRAY
10	WHITE
11	PINK
12	LIGHT GREEN
13	LIGHT BLUE
14	BLACK/WHITE
15	BROWN/WHITE
16	RED/WHITE
17	ORANGE/WHITE

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE:1 ohm MAX.

3	17		BLACK HEAT SHRINK TUBE.
2	1		M12 17PIN FEMALE, BALCK INSULATOR,SOLDER TYPE WP-17F2-04.
1	17		26AWG HD-PE ELECTRONIC WIRE A LOTS KINDS OF COLOR OD:0.9MM.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		 Seconn International Enterprise Co., Ltd.
DRAWN	Huang shenggen	SCALE	1:1	TITLE
CHECK,BY	Caojiawei	REV	A	M12 17P F/OPEN
APP,BY	Mr.Huang	DATE	2013/05/31	TOLERANCES
DWG NO.	SE-S-0081			X.= ± .X= ± .XX= ± .XXX= ±
PART NO.	M12C-S17RFC-50			SHEET 1/1 SIZE A4