
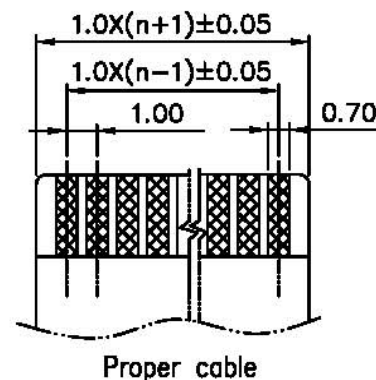
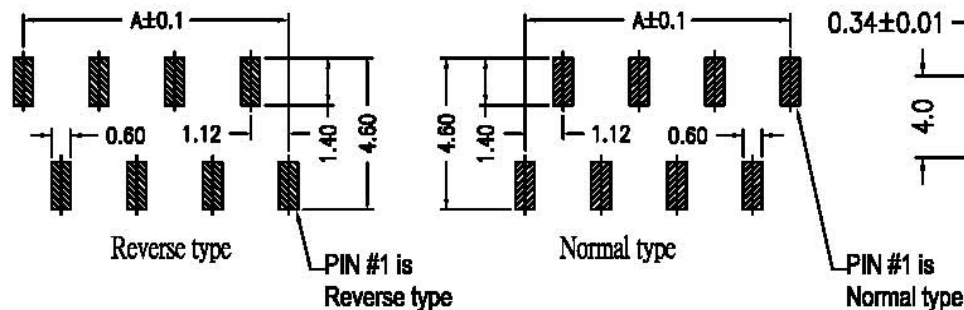
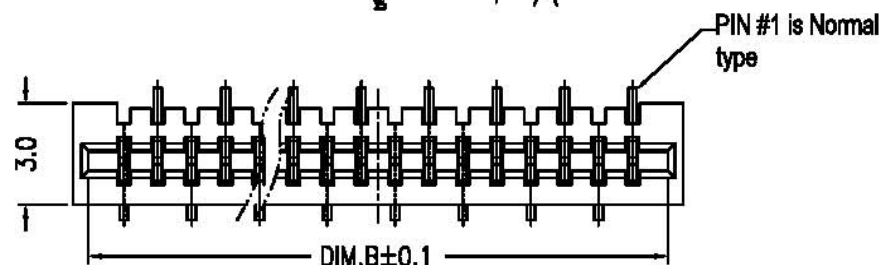
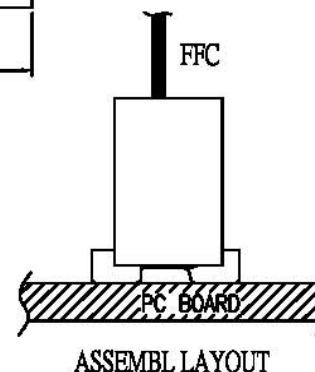
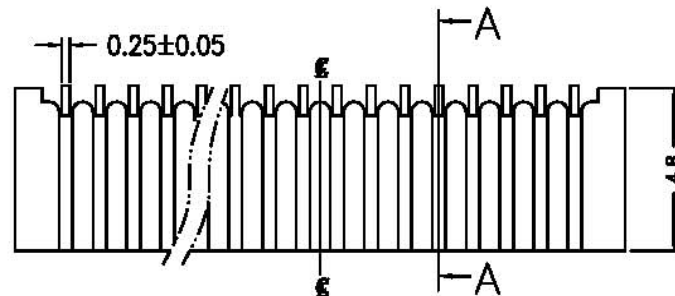



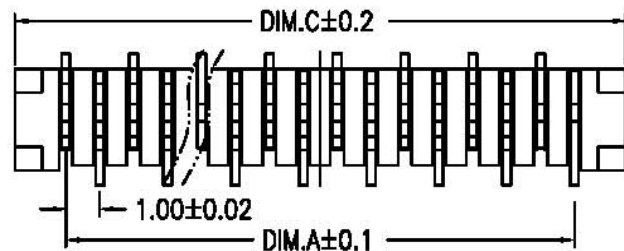

SPECIFICATION:

- Poles:
4~40
- Voltage rating:
AC, DC, 200V(50HZ)
AC, DC, 50V(200HZ)
- Current rating:
0.5A, AC/DC
- Withstand voltage:
500V AC/minutes
- Working Temperature:
-25°C~+85°C
- Insulation resistance:
>800MΩ
- Contact resistance:
<0.02Ω
- Terminal mtr'l:
Phosphor Bronze
- Housing mtr'l:
PPS,UL94V-0

PIN	A	B	C
40P	39.00	41.10	42.20
39P	38.00	40.10	41.20
38P	37.00	39.10	40.20
37P	36.00	38.10	39.20
36P	35.00	37.10	38.20
35P	34.00	36.10	37.20
34P	33.00	35.10	36.20
33P	32.00	34.10	35.20
32P	31.00	33.10	34.20
31P	30.00	32.10	33.20
30P	29.00	31.10	32.20
29P	28.00	30.10	31.20
28P	27.00	29.10	30.20
27P	26.00	28.10	29.20
26P	25.00	27.10	28.20
25P	24.00	26.10	27.20
24P	23.00	25.10	26.20
23P	22.00	24.10	25.20
22P	21.00	23.10	24.20
21P	20.00	22.10	23.20
20P	19.00	21.10	22.20
19P	18.00	20.10	21.20
18P	17.00	19.10	20.20
17P	16.00	18.10	19.20
16P	15.00	17.10	18.20
15P	14.00	16.10	17.20
14P	13.00	15.10	16.20
13P	12.00	14.10	15.20
12P	11.00	13.10	14.20
11P	10.00	12.10	13.20
10P	9.00	11.10	12.20
9P	8.00	10.10	11.20
8P	7.00	9.10	10.20
7P	6.00	8.10	9.20
6P	5.00	7.10	8.20
5P	4.00	6.10	7.20
4P	3.00	5.10	6.20

UNIT	mm	Projection	Symbol	Seconn International Enterprise Co., Ltd.		
TOLERANCES				TITLE		
x. = ± 0.35 .x = ± 0.2 .xx = ± .xxx = ±				1.0 mm Pitch NON-ZIF FPC SMT Vertical Dual Contact Connector		
DRAWN Kevin DATE 2009/4/1				PART NO.	FPC-SMNV10-xxPT	
SCALE 1:1 SIZE A4				SHEET	1/1	REV A3