




REV	ZONE	REVISION	DATE

Specification:
Contact Resistance: 50m Ohm Max.
Insulation Resistance: 100M Ohm Min.
Voltage - Max;5V Maximum
Current - Max:0.5A Maximum.
Dielectric Withstanding Voltage:
100V AC for 1 Minute.
Durability (Life Test): 1000 Cycles
Unmating Force:4.9 Newton TO 39 Newton Maximum.

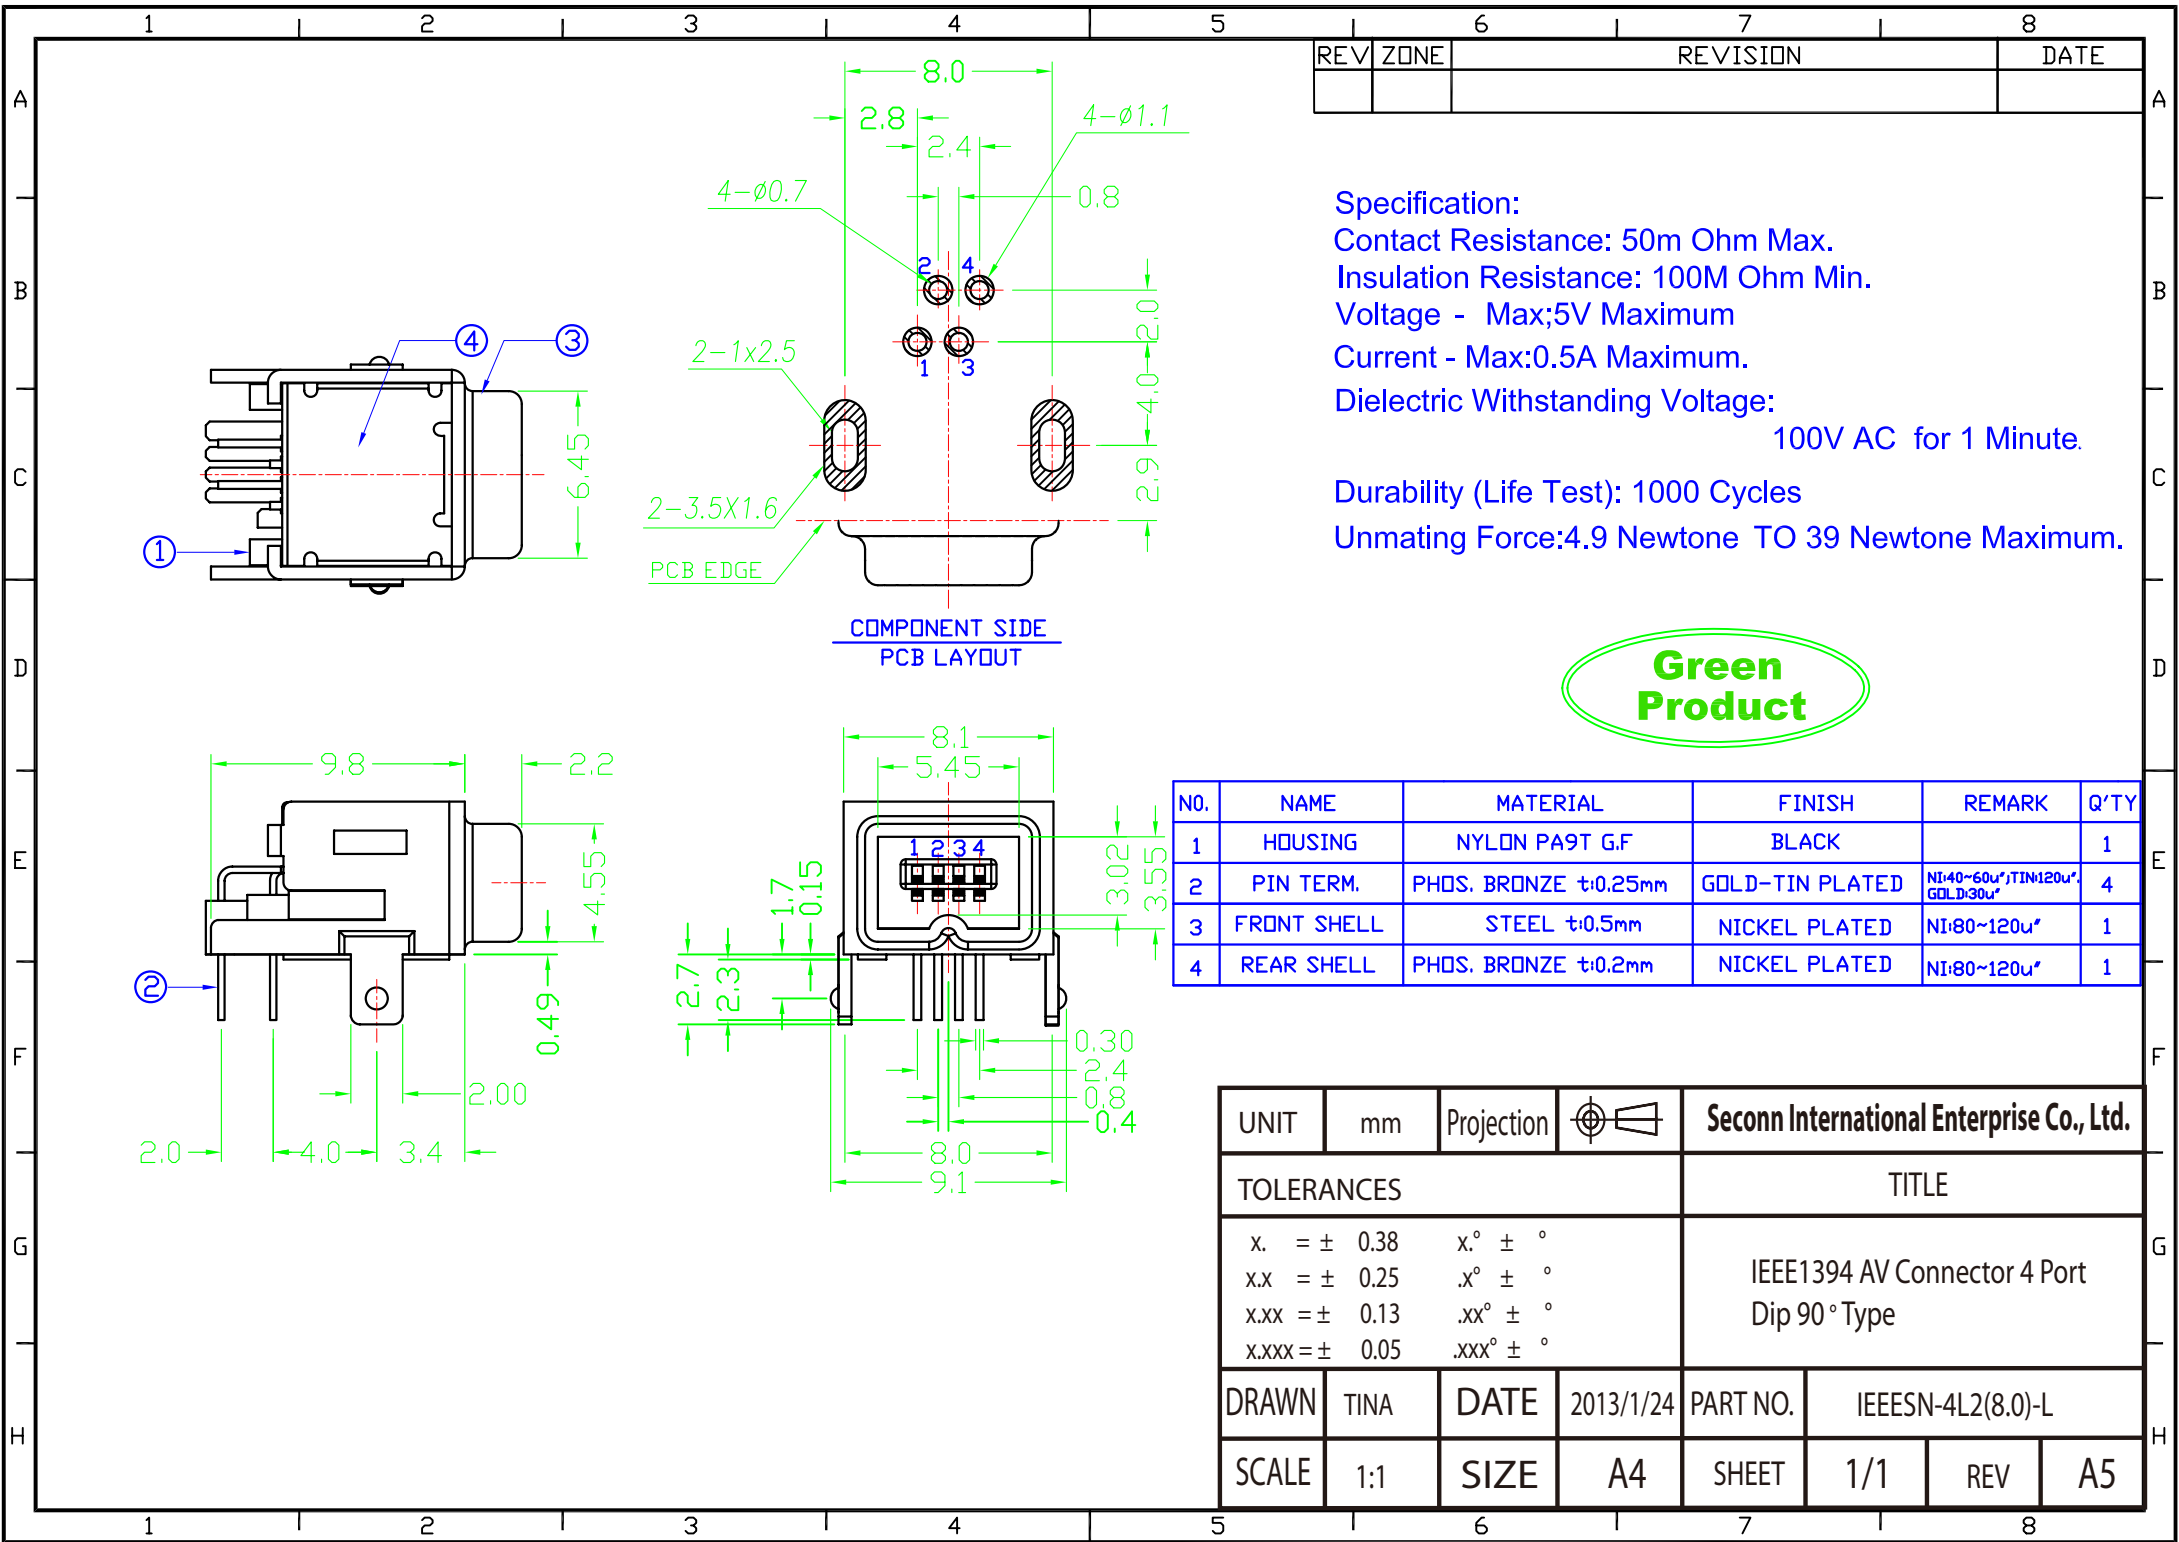

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	NYLON PA9T G.F	BLACK		1
2	PIN TERM.	PHOS. BRONZE t:0.25mm	GOLD-TIN PLATED	NI:40~60u",TIN:120u", GOLD:30u"	4
3	FRONT SHELL	STEEL t:0.5mm	NICKEL PLATED	NI:80~120u"	1
4	REAR SHELL	PHOS. BRONZE t:0.2mm	NICKEL PLATED	NI:80~120u"	1

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.				
TOLERANCES				TITLE				
x.	= ± 0.38	x.°	± °	IEEE1394 AV Connector 4 Port Dip 90° Type				
x.x	= ± 0.25	.x°	± °					
x.xx	= ± 0.13	.xx°	± °					
x.xxx	= ± 0.05	.xxx°	± °					
DRAWN	TINA	DATE	2013/1/24	PART NO.	IEEESN-4L2(8.0)-L			
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A5	