



RoHS COMPLIANT

DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2013/10/17	

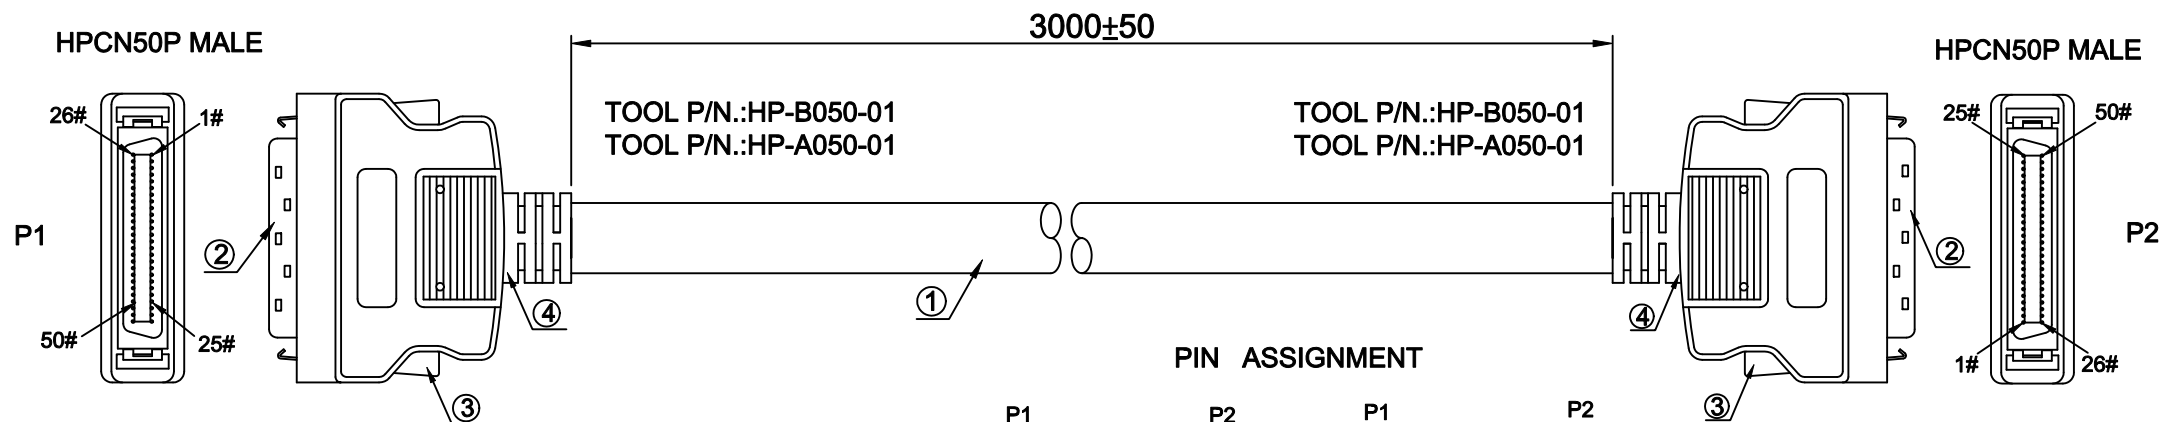


PIN ASSIGNMENT

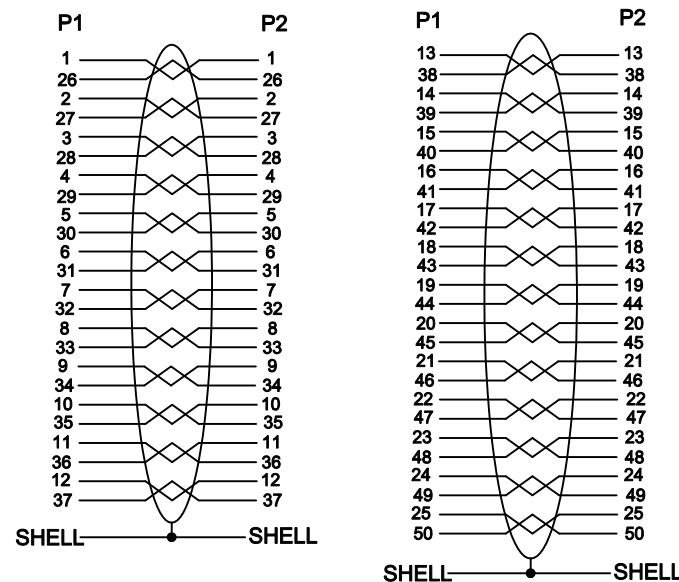

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec,
 - CONTACT RESISTANCE: 3 ohm MAX.

4		G0015	ALL CONNECTORS OVERMOLD BEIGE PVC.
3	4	C0112	ABS CLAW BAR COLOR: BEIGE.
2	2	A0305	HPCN50P MALE IDC TYPE, BLACK INSULATOR.
1	1		28AWG*25P+ADB OD: 9.0MM BEIGE JACKET UL2919.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		 Seconn International Enterprise Co., Ltd.
DRAWN	Huang shenggen	SCALE	1:1	
CHECK, BY		REV	A	HPCN50 M TO HPCN50 M
APP, BY		DATE	2013/10/17	
DWG NO.	SE-S-0088			X.= ± .X=
PART NO.	CLIP-95145F77			SHEET 1/1