


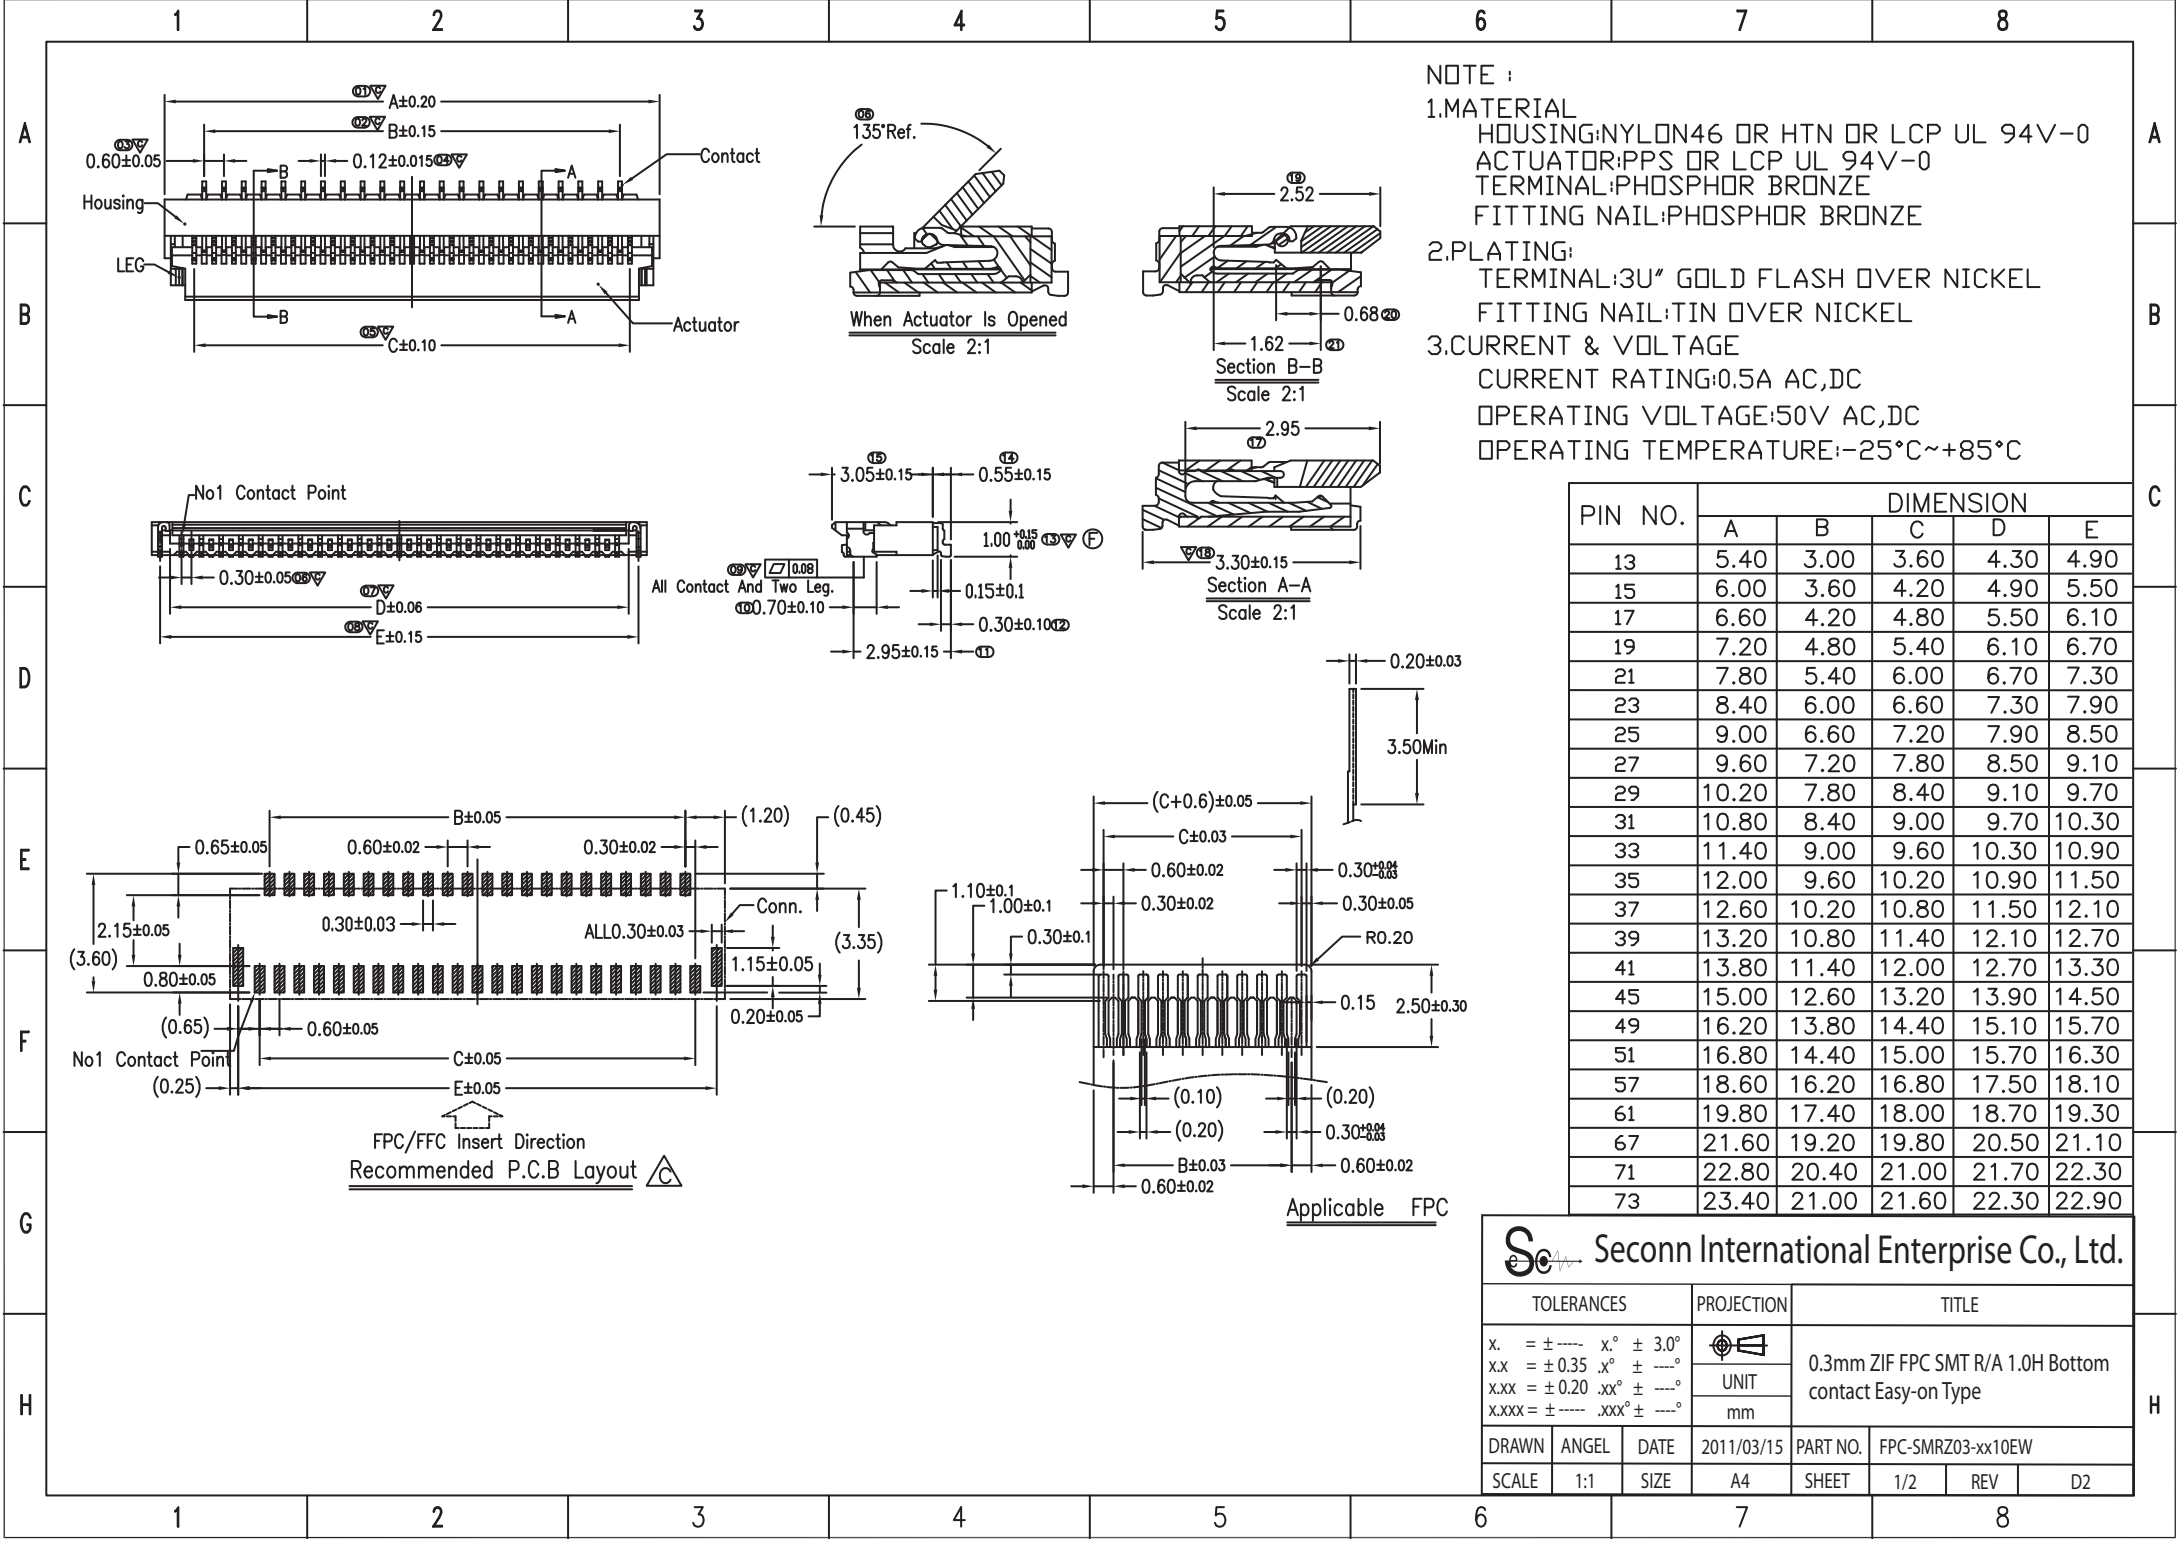

NOTE :

1.MATERIAL
HOUSING:NYLON46 OR HTN OR LCP UL 94V-0
ACTUATOR:PPS OR LCP UL 94V-0
TERMINAL:PHOSPHOR BRONZE
FITTING NAIL:PHOSPHOR BRONZE


2.PLATING:
TERMINAL:3U" GOLD FLASH OVER NICKEL
FITTING NAIL:TIN OVER NICKEL

3.CURRENT & VOLTAGE
CURRENT RATING:0.5A AC,DC
OPERATING VOLTAGE:50V AC,DC
OPERATING TEMPERATURE:-25°C~+85°C

PIN NO.	DIMENSION				
	A	B	C	D	E
13	5.40	3.00	3.60	4.30	4.90
15	6.00	3.60	4.20	4.90	5.50
17	6.60	4.20	4.80	5.50	6.10
19	7.20	4.80	5.40	6.10	6.70
21	7.80	5.40	6.00	6.70	7.30
23	8.40	6.00	6.60	7.30	7.90
25	9.00	6.60	7.20	7.90	8.50
27	9.60	7.20	7.80	8.50	9.10
29	10.20	7.80	8.40	9.10	9.70
31	10.80	8.40	9.00	9.70	10.30
33	11.40	9.00	9.60	10.30	10.90
35	12.00	9.60	10.20	10.90	11.50
37	12.60	10.20	10.80	11.50	12.10
39	13.20	10.80	11.40	12.10	12.70
41	13.80	11.40	12.00	12.70	13.30
45	15.00	12.60	13.20	13.90	14.50
49	16.20	13.80	14.40	15.10	15.70
51	16.80	14.40	15.00	15.70	16.30
57	18.60	16.20	16.80	17.50	18.10
61	19.80	17.40	18.00	18.70	19.30
67	21.60	19.20	19.80	20.50	21.10
71	22.80	20.40	21.00	21.70	22.30
73	23.40	21.00	21.60	22.30	22.90


Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
X. = ± ---- X.° ± 3.0°				0.3mm ZIF FPC SMT R/A 1.0H Bottom contact Easy-on Type			
X.X = ± 0.35 X.° ± ----°							
X.XX = ± 0.20 .XX° ± ----°							
X.XXX = ± ---- .XXX° ± ----°							
			UNIT				
			mm				
DRAWN	ANGEL	DATE	2011/03/15	PART NO.	FPC-SMRZ03-xx10EW		
SCALE	1:1	SIZE	A4	SHEET	1/2	REV	D2

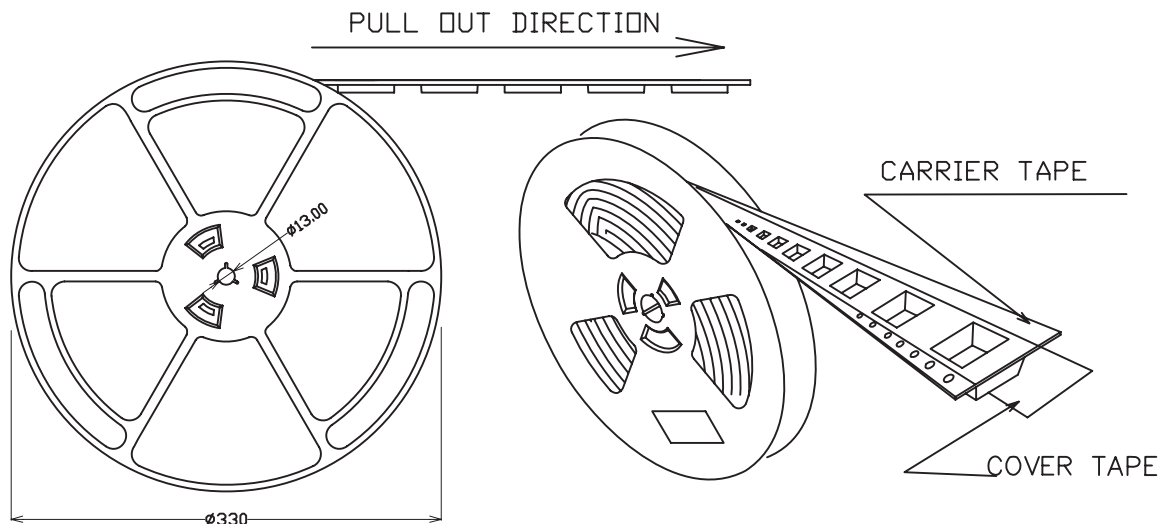

NOTES :

1. Packing Confirm EIA-481-C Standards.
2. 10 sprocket hole pitch cumulative $\pm 0.20\text{mm}$.
3. Carrier camber is within 1mm in 250mm.
4. Material: Black conductive Polystyrene Alloy.
5. Packing length per 13" reel: 42.0Meters.
6. Component load per 13" reel: 5000 Pcs.

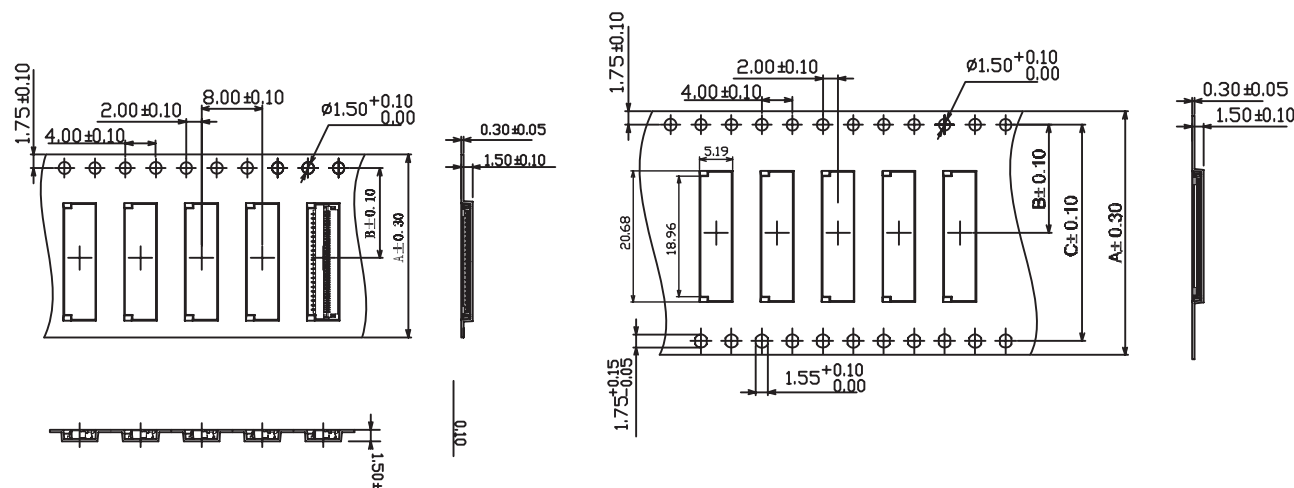

PIN NO.	Dimension		
	A	B	C
11 ~ 25P	16.0	7.5	—
27 ~ 49P	24.0	11.5	—
51 ~ 69P	32.0	14.2	28.4
71P	44.0	20.2	40.4

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x. = $\pm$ ----	x. ^o = $\pm 3.0^{\circ}$			0.3mm ZIF FPC SMT R/A 1.0H Bottom contact Easy-on Type			
x.x = ± 0.35	x. ^o = ----						
x.xx = ± 0.20	.xx ^o = ----						
x.xxx = $\pm$ ----	.xxx ^o = ----		UNIT				
			mm				
DRAWN	ANGEL	DATE	2011/03/15	PART NO.	FPC-SMRZ03-xx10EW		
SCALE	1:1	SIZE	A4	SHEET	2/2	REV	D2