



RoHS COMPLIANT

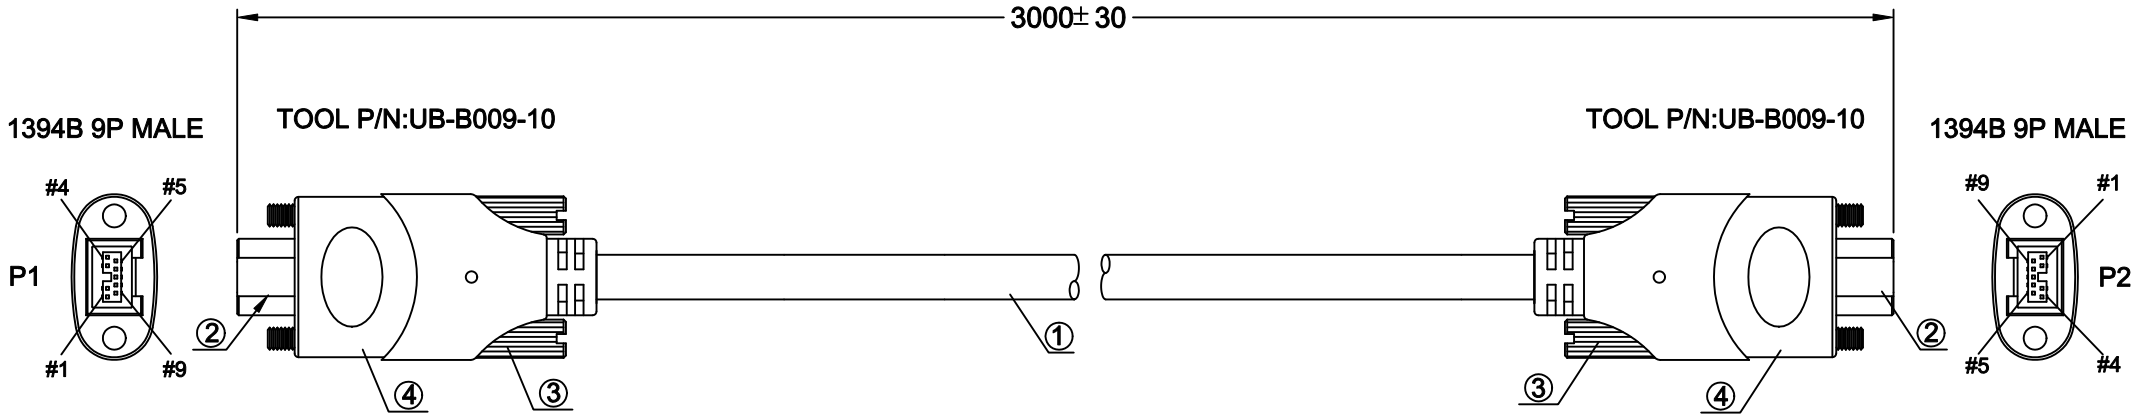


NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE: 3ohm MAX.

PIN ASSIGNMENT

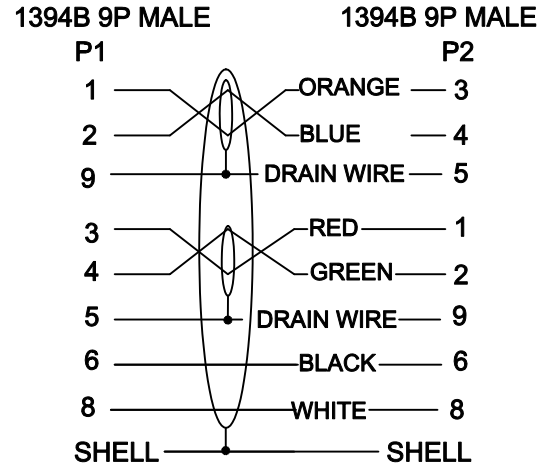

SCREW DETAIL

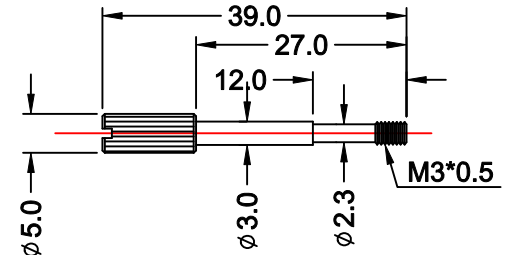

4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	4	C0295	SCREW:M3*0.5 5.0*39MM,NICKEL PLATED.
2	2	A0566	1394B 9P MALE,BLACK INSULATOR,SOLDER TYPE.
1	1	E0966	1394B(30AWG*1Pair+2D+FAM)*2+26AWG*2C+AM+B, OD:5.0MM, UL20276.
ITEM	QTY	PART NUMBER	DESCRIPTION

Seconn International Enterprise Co., Ltd.

PART NO.: SE-S-0003
 DESCRIPTION:
 IEEE1394B 9 Pin Male to Male Screw
 Type Cable 3M length UL20276

MAR-16-2010	A	NEW DRAWING	
DATE	REV.	DESCRIPTION	

DRAWING NO: DH-S-0003	UNIT: mm	SHEET 1/1
APPROVED:	CHECKED:	DRAWN BY: Yi jialu