


A

RoHS COMPLIANT


MDR26 MALE

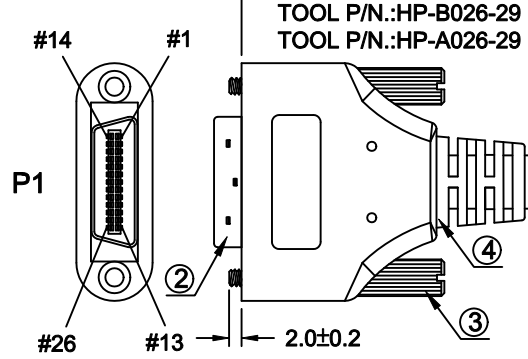

LENGTH

TOOL P/N.:HP-B026-29
TOOL P/N.:HP-A026-29



MDR26 MALE

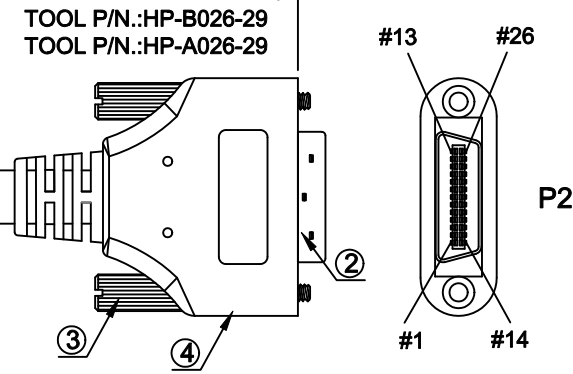

- NOTES:**
- 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 - 2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01~0.08sec.
 - (c). CONTACT RESISTANCE:3~5 ohm MAX.

4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	4	C0307	SCREW:#4-40UNC 6.0*35.3MM NICKEL PLATED.
2	2	A0641	MDR26 MALE GOLD FLASH CONTACTS,BLACK INSULATOR.
1	1	E0755-2	UL20276 (28AWG*2C+AM)*11PCS+4D+FPP+ FAM+BRAID OD:9.5MM,BLACK PVC JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

PIN ASSIGNMENT

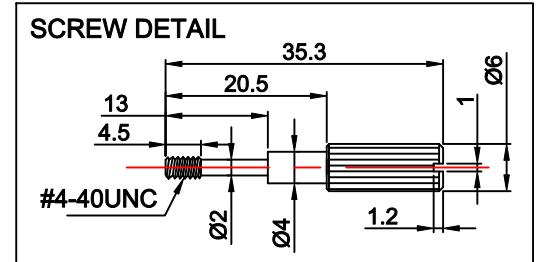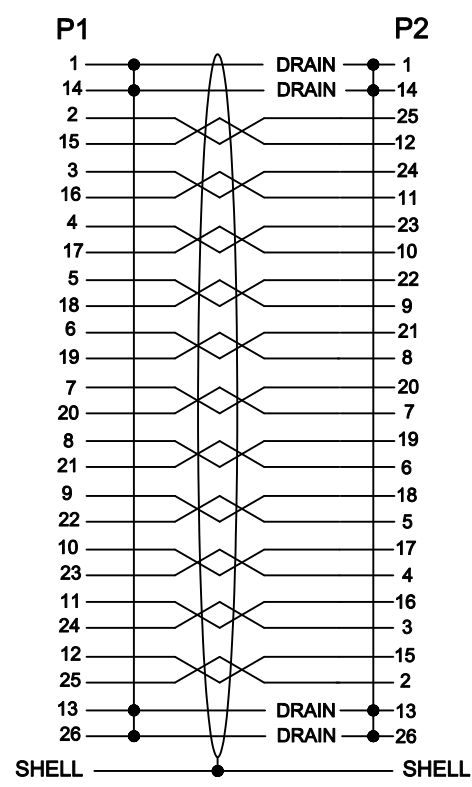

Seconn International Enterprise Co., Ltd.

	REV.	PART NO: SE-S-0014		
	A	MDR26 male Cable UL20276 Camera Link Cable		
DRAW,BY: <i>Huangshenggen</i>		CUSTOMER P/N:		
CHECK,BY: <i>James</i>		SCALE	UNIT	SHEET
APP,BY: <i>Mr. Huang</i>		FREE	mm	1/1

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	NEW DRAWING	APR-23-2013	