


RoHS COMPLIANT

DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2013/11/25	

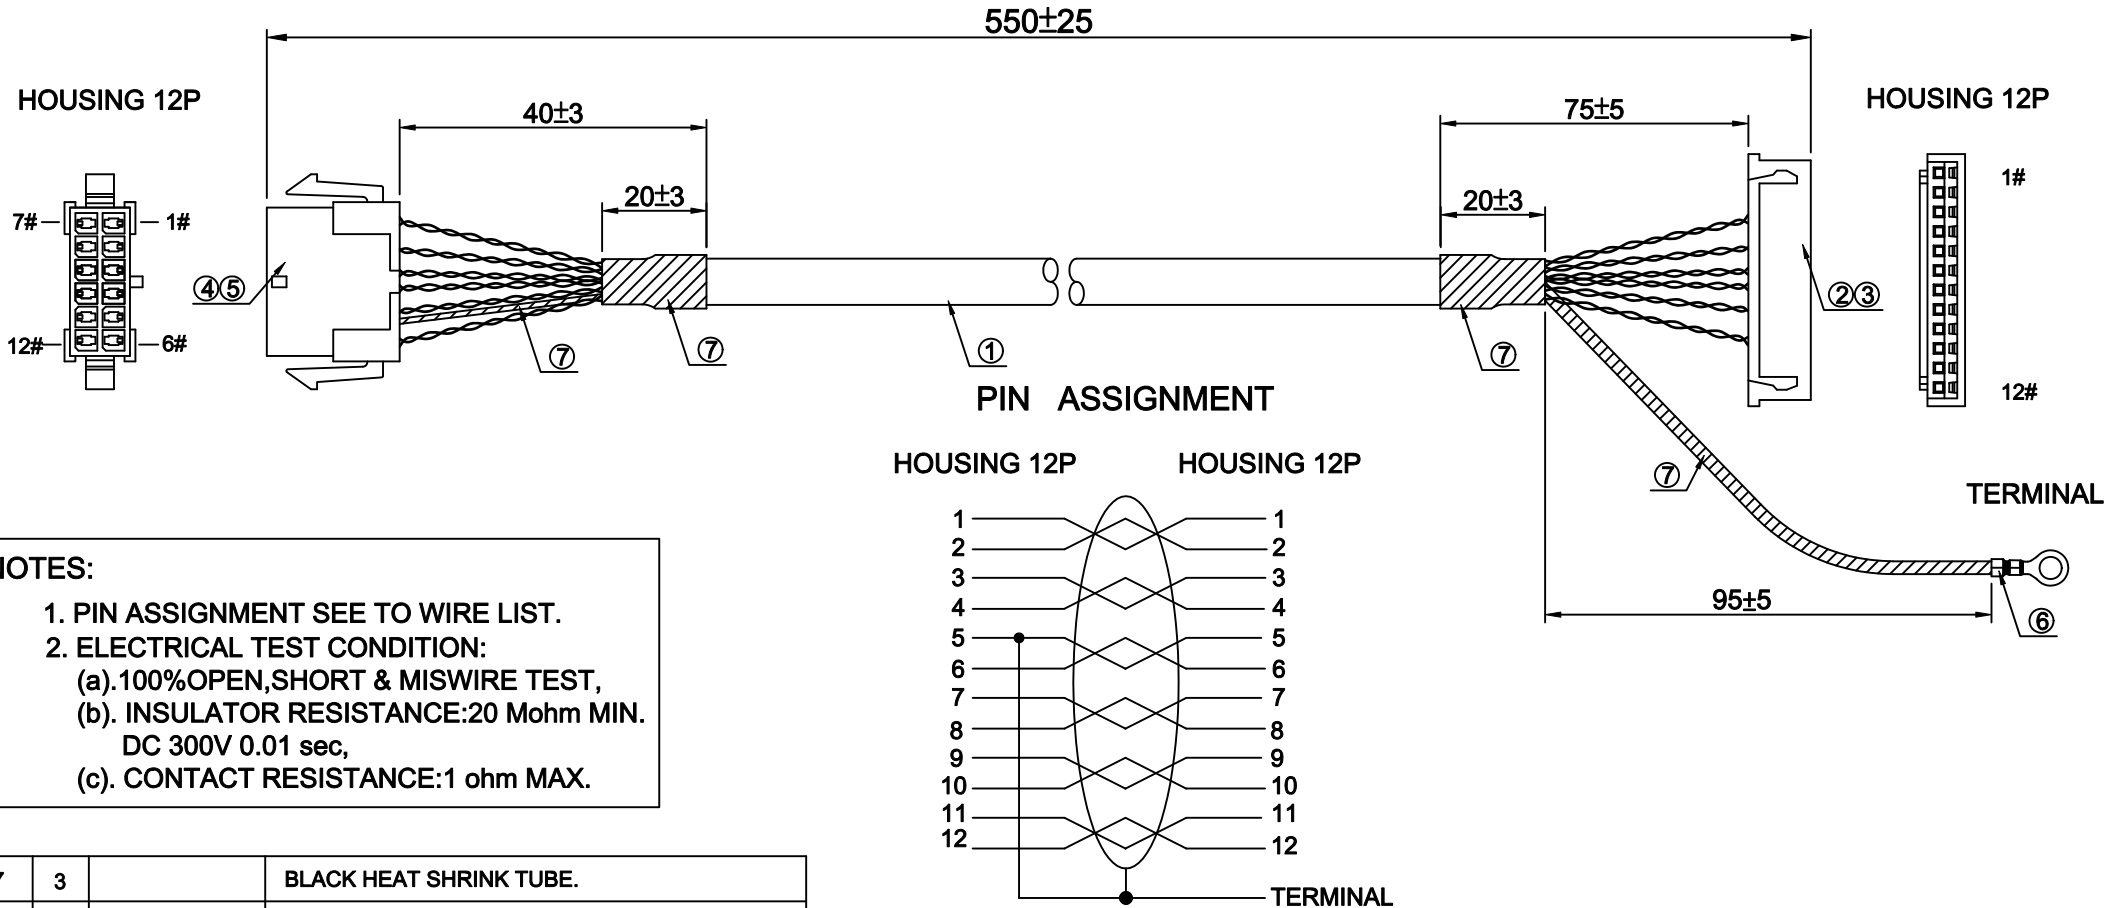

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01 sec,
 - CONTACT RESISTANCE: 1 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
7	3		BLACK HEAT SHRINK TUBE.
6	1	B0174	GROUND TERMINAL: Ø3.7mm, TIN PLATED.
5	12		TERMINAL: PITCH 3.0MM P/N: 3002-TL.
4	1		HOUSING: PITCH 3.0MM 12PIN P/N: 3002-2*6P.
3	12		TERMINAL: PITCH 2.5MM P/N: XH(SMT)-5-12Y-T.
2	1		HOUSING: PITCH 2.5MM 12PIN P/N: XH(SMT)-5-12Y.
1	1	E0696	22AWG*6P+AEB BEIGE PVC JACKET OD: 8.3MM UL2919.

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.
DRAWN	Huang shenggen	SCALE	1:1	
CHECK, BY	Cao jiawei	REV	A	2.5mm pitch 12 Pin Housing to 3.0mm pitch 2x6Pin Housing with 1 Ring Terminal Cable 0.55M length
APP, BY	Mr. Huang	DATE	2013/11/25	
DWG NO.				X = ± .X =
PART NO.	SE-S-0094			SHEET 1/1